



HOSHIZAKI

Advance K 140-4 L Double door refrigerator



PRODUCT SERIES: ADVANCE 140
ITEM NUMBER: 131141070
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Advance K 140 L is a 2/1 GN deep double door refrigerator with a net usable volume of 797 ltr. ranking C in energy efficiency class. It has a cabinet height of 1980-2030 mm and depth of 830 mm. Legs are adjustable 130-180.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Clean free condenser (condenser filter not needed)
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Complete wall rails, Shelf support
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2 / 1 GN

ACCESSORIES INCLUDED

6 grey shelves (530 x 650mm) + 2 bottom shelves

OPTIONAL EXTRAS

- Set of legs 130-180 mm
- Set of castors 125 mm (2 x broken and 2 x unbroken)
- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of stainless shelves (6 top and 2 bottom) with back guard
- Shelf support U-shape, left side
- Shelf support U-shape, right side
- Master key
- Pedal door openers with overload protection

WARRANTY PERIOD

**5 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless Steel

INTERIOR

Stainless steel

Refrigerant type: R290 / Refrigerant: 0.085 kg / CO2 equivalent: 0.255 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
870 kWh/year	C	ISO 22041: 2019	45.33 EEI



HOSHIZAKI

Advance K 140-4 L



TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -10°C)
0/+10°C	2/1 GN deep	1,200 l	797 l	230V, 50Hz	270 W	5 (max. ambient 40°C w/ 40% RH)	52 dB	634 W


SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
1,435 mm	920 mm	2,090 mm	2.76 m ³	184 kg	1,344 mm	830 mm	1,850 mm	1,980 mm	2,030 mm	172 kg


Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

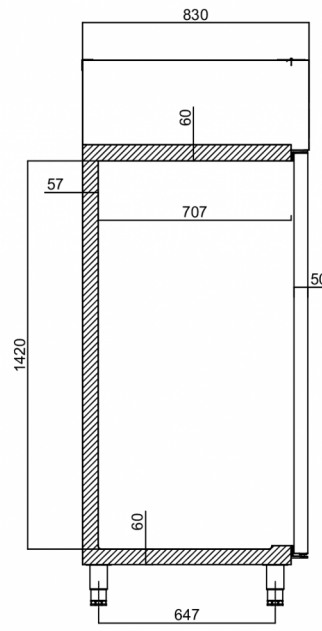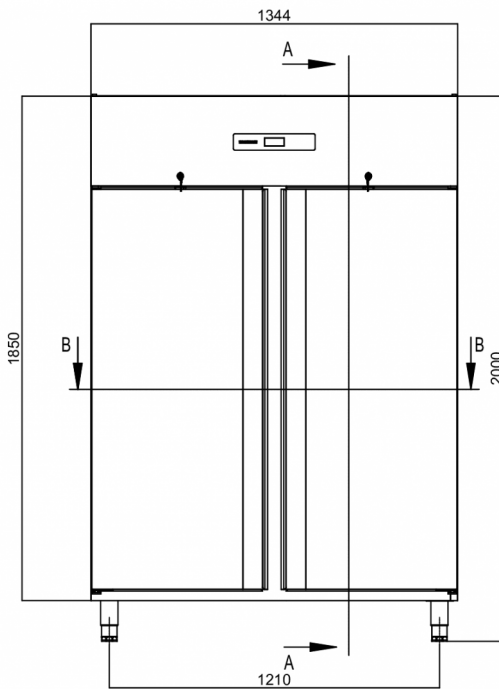

A-A

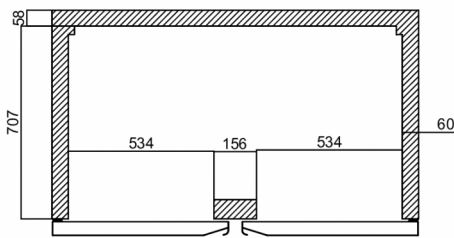

B-B



Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com