



HOSHIZAKI

Premier M BW80 DR Refrigerator

PRODUCT SERIES: PREMIER BW80
ITEM NUMBER: 182800010
COUNTRY OF ORIGIN: TURKEY



Hoshizaki Premier M BW80 DR is a 2/1 GN wide fresh meat refrigerator with a net usable volume of 457 ltr. ranking in energy efficiency class A. It has a cabinet height of 1970 mm and depth of 770 mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable door gaskets
- Pan-shaped inside base with rounded corners to catch fluid
- Integrated castors
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters



2/1 GN

ACCESSORIES INCLUDED

4 grey shelves, 4 sets of shelf supports

OPTIONAL EXTRAS

- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of 4 stainless shelves with back guard
- Set of 2 shelf supports U shape
- Master key

WARRANTY PERIOD

**6 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R600a / Refrigerant: 0.07 kg / CO2 equivalent: 0.21 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
333 kWh/year	A	ISO 22041: 2019	24.45 EEI

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com



HOSHIZAKI

Premier M BW80 DR





TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -10°C)
-5/+12°C	2/1 GN wide	610 l	457 l	230V, 50Hz	120 W	5 (max. ambient 40°C w/ 40% RH)	46 dB(A)	206 W

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
870 mm	795 mm	2,150 mm	1.487 m ³	145 kg	830 mm	770 mm	1,970 mm	135 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

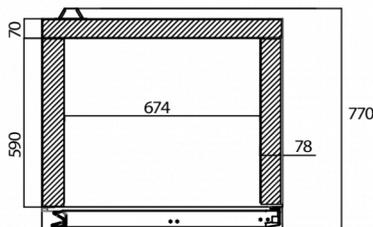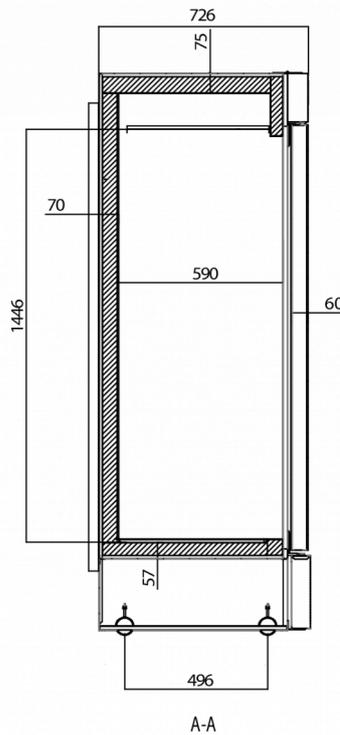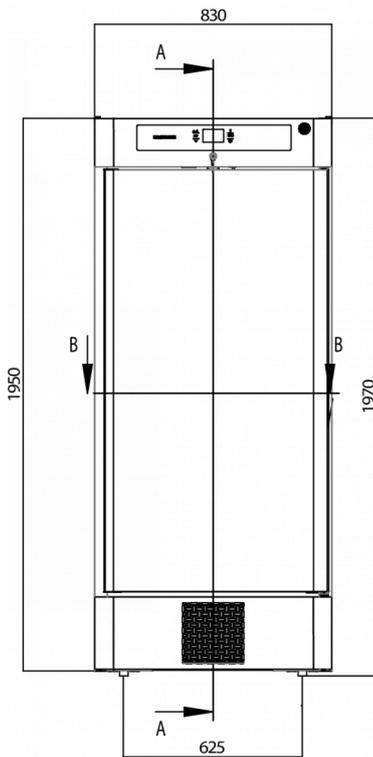

Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com