




HOSHIZAKI

Premier KG 60 L DR Glass door refrigerator



1/1 EN

PRODUCT SERIES: PREMIER 60
ITEM NUMBER: 184601010
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier KG 60 L DR is a glass door refrigerator suitable for the Euronorm 1/1 system (400 x 600 mm) with a net usable volume of 335 ltr. ranking in energy efficiency class B. It has a cabinet height of 2080-2130 mm and depth of 848 mm without pedal door opener (depth of 920 mm incl. pedal door opener). Legs are adjustable 130-180 mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Climate class 4 cooling system enduring up to +30°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

ACCESSORIES INCLUDED

4 grey shelves (400 x 600 mm), Pedal door opener with overload protection

OPTIONAL EXTRAS

Set of legs 130-180 mm
 Set of castors 125 mm (2 x broken and 2 x unbroken)
 Grey shelf with back guard
 Grey bottom shelf with back guard
 Stainless shelf with back guard
 Stainless bottom shelf with back guard
 Set of 4 stainless shelves with back guard
 Set of 2 rail for EN 1/1 cabinet U shape
 Master key

WARRANTY PERIOD

**6 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R600a / Refrigerant: 0.08 kg / CO2 equivalent: 0.24 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
373 kWh/year	B	ISO 22041: 2019	32.2 EEI



HOSHIZAKI

Premier KG 60 L DR



TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -10°C)
+2/+12°C	Shelf Euronorm 400x600mm EN 1/1	480 l	335 l	230V, 50Hz	120 W	4 (max. ambient temp. of 30 °C with 55% RH)	46 dB	206 W


SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
670 mm	880 mm	2,150 mm	1.268 m ³	125 kg	610 mm	848 mm	1,950 mm	2,080 mm	2,130 mm	115 kg


Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

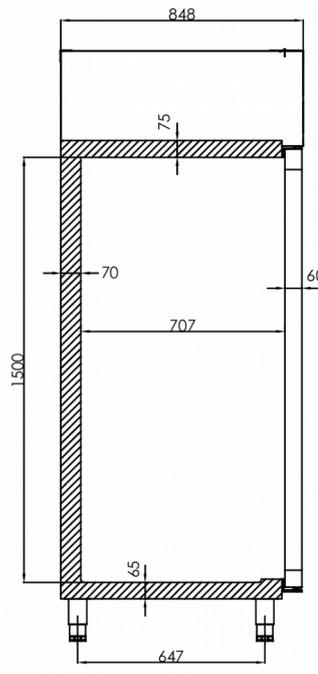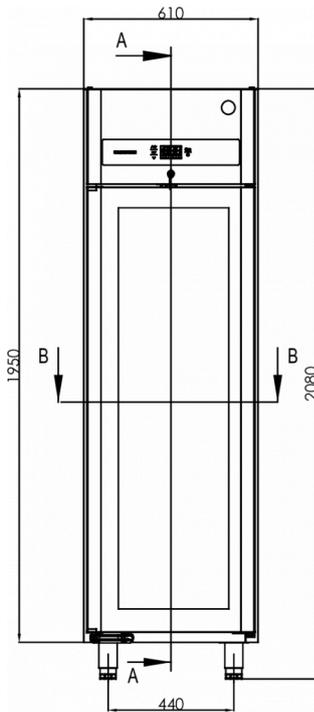

A-A



B-B



Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com