



# HOSHIZAKI

## Premier KG 70 L DR Glass door refrigerator

PRODUCT SERIES: PREMIER 70  
ITEM NUMBER: 184701010  
COUNTRY OF ORIGIN: TURKEY



Hoshizaki Premier KG 70 L DR is a 2/1 GN deep glass door refrigerator with a net usable volume of 475 ltr. ranking in energy efficiency class B. It has a cabinet height of 2080-2130 mm and depth of 848 mm without pedal door opener (depth of 920 mm incl. pedal door opener). Legs are adjustable 130-180 mm.

- Ventilated refrigeration system
- Air circulation system
- Compartmentalized design for maximum internal capacity and easy maintenance
- Clean free condenser (condenser filter not needed)
- Moulded stainless inner lower base w/rounded corners
- Anti-tilt shelf supports moulded into the inner lining
- Automatic fan cut-out when door is opened
- Automatic defrost function
- Low sound level
- AISI 304 stainless steel exterior and interior
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable door gaskets
- Pedal door opener with overload protection (included as accessory)
- 4 grey shelves (530 x 650mm)
- Internal LED lighting
- Legs, H = 130-180mm



**2/1 GN**

### ACCESSORIES INCLUDED

3 grey shelves (530 x 650mm) + 1 bottom shelf, Pedal door opener with overload protection

### OPTIONAL EXTRAS

- Set of legs 130-180 mm
- Set of castors 125 mm (2 x broken and 2 x unbroken)
- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of stainless shelves (3 top and 1 bottom) with back guard
- Master key

### WARRANTY PERIOD

**6 Years on Parts & Labour -  
based on country agreement**

### EXTERIOR

**Stainless steel AISI 304**

### INTERIOR

**Stainless steel AISI 304**

Refrigerant type: R600a / Refrigerant: 0.08 kg / CO2 equivalent: 0.24 kg

### CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
451 kWh/year	B	ISO 22041: 2019	32.49 EEI



# HOSHIZAKI

## Premier KG 70 L DR




### TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -10°C)
+2/+12°C	2/1 GN deep	700 l	475 l	230V, 50Hz	120 W	4 (max. ambient temp. of 30 °C with 55% RH)	48 dB	206 W


### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
750 mm	880 mm	2,150 mm	1.419 m <sup>3</sup>	140 kg	690 mm	848 mm	1,950 mm	2,080 mm	2,130 mm	130 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

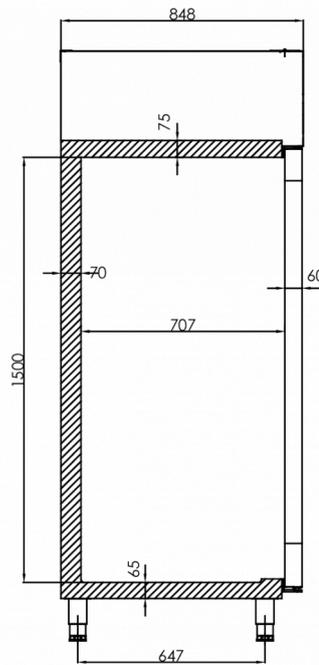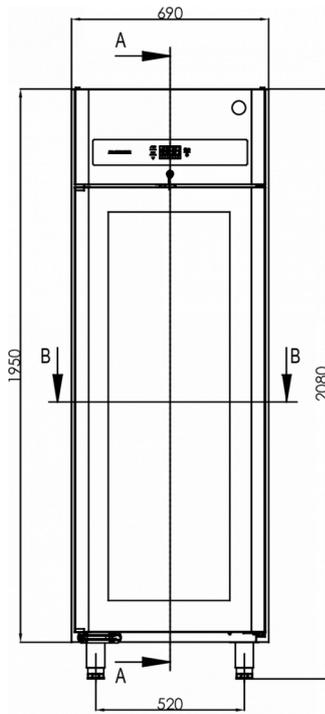

B-B



Hoshizaki Belgium  
 Hoshizaki Danmark  
 Hoshizaki Deutschland  
 Hoshizaki France  
 Hoshizaki Iberia  
 Hoshizaki Italia  
 Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
 Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
 Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
 Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
 Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
 Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)