



HOSHIZAKI

Premier U 140 Ru1 Double door Refrigerator/Freezer 'U' type with RU1 valve for remote cooling system



2/1 GN

ACCESSORIES INCLUDED

6 grey shelves (530 x 650mm) + 2 bottom shelves, Pedal door opener with overload protection

OPTIONAL EXTRAS

Set of legs 130-180 mm
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (6 top and 2 bottom) with back guard
Master key

PRODUCT SERIES: PREMIER 140
ITEM NUMBER: 188141071
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier U 140 Ru1 is a double door 2/1 GN deep cabinet with RU1 valve for connection to a remote cooling system. It is ready to install and is compatible with multiple refrigerants. This heavy duty cabinet has a gross volume of 1400 ltr. and the height of the cabinet with adjustable legs is 2080-2130 mm. Adjustable legs are 130-180 mm. The depth is 848 mm without pedal door opener (920 mm incl. pedal door opener).

Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:
K: +2/+12°C M: -5/+12°C F: -25/-5°C

- Ready-to-install cabinet with RU1 valve
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic electric defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Tested to Climate Class 5
- Exterior and interior of stainless steel AISI 304
- Complete wall rails, Shelf supports
- LED lighting on the top panel
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

WARRANTY PERIOD

1 Year on Parts

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant compatibility: R448A, R449A, R452A

CERTIFICATIONS





HOSHIZAKI

Premier U 140 Ru1

TECHNICAL SPECIFICATIONS






Shelf size	Volume, gross	Power supply	Min. cooling capacity K and M cabinets at -10°C	Min. cooling capacity F cabinets at -30°C	Maximum current amperage	Maximum system pressure	Connection load	Temperature Range Span	Climate class
2/1 GN deep	1,400 l	230V, 50Hz	360 W	700 W	3.1 Ah	90 Bar	720 W	-25/+12°C	5 (max. ambient 40°C w/ 40% RH)

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
1,420 mm	975 mm	2,150 mm	2.977 m3	186 kg	1,380 mm	848 mm	1,950 mm	2,080 mm	2,130 mm	170 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: This cabinet for connection to remote cooling system is on special order only. Please take longer lead times into consideration

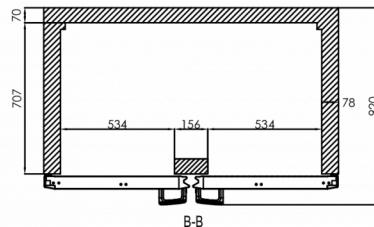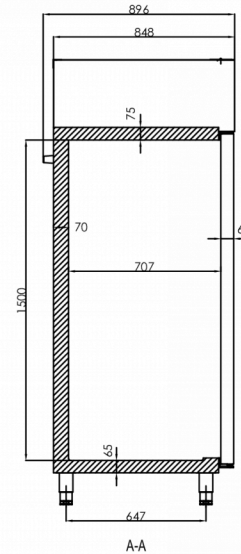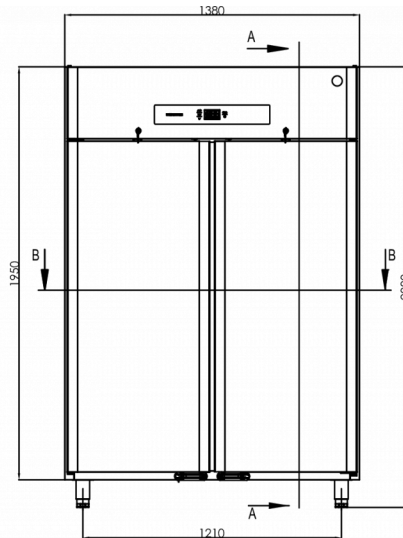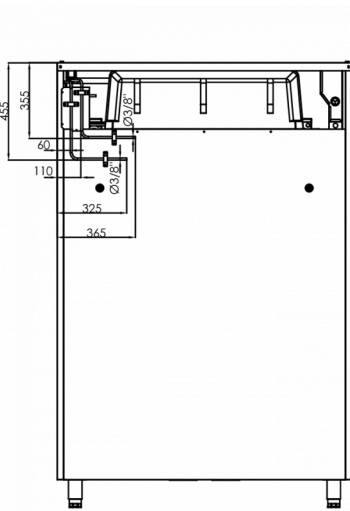

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com