



# HOSHIZAKI

## Premier U 140 CO2 Refrigerator/Freezer 'U' type without controller (Knockdown) for remote cooling system



2 / 1 GN

### ACCESSORIES INCLUDED

6 grey shelves (530 x 650mm) + 2 bottom shelves, Pedal door opener with overload protection

### OPTIONAL EXTRAS

- Set of legs 130-180 mm
- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of stainless shelves (6 top and 2 bottom) with back guard
- Shelf support U-shape, left side
- Shelf support U-shape, right side
- Master key

PRODUCT SERIES: PREMIER 140  
ITEM NUMBER: 188141072  
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier U 140 CO2 is a 2/1 GN deep double door cabinet for connection to a remote cooling system and is compatible with R744 (CO2) refrigerant. Combine this product with a controller from alternative controller manufacturers. This heavy duty cabinet has a gross volume of 1400 ltr. and the height of the cabinet with adjustable legs is 2080-2130mm. Adjustable legs are 130-180 mm. The depth is 848 mm without pedal door opener (920 mm incl. pedal door opener).

#### Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:  
K: +2/+12°C M: -5/+12°C F: -25/-5°C

- For connection to external cooling system and compatible with refrigerant R744 (CO2)
- Prepared for easy integration of installer's preferred controller
- Standard controller display cut-out, size H29 x W71 mm.
- Includes pressure transmitter that however can be replaced by a transmitter of installer's choice.
- Air distribution system
- Automatic fan cut-out when door is opened
- Automatic electric defrost with re-evaporation of defrost water
- Heavy duty cabinet built for climate class 5 cooling system
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf supports moulded into the inner lining
- Stainless steel wall rails and adjustable shelf supports
- LED lighting on the top panel
- Right hand hinged reversible door
- Door with automatic door closing and lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection

**WARRANTY PERIOD**  
**1 Year on Parts**

**EXTERIOR**  
**Stainless steel AISI 304**

**INTERIOR**  
**Stainless steel AISI 304**

Refrigerant compatibility: R744

### CERTIFICATIONS





# HOSHIZAKI

## Premier U 140 CO2

### TECHNICAL SPECIFICATIONS


Shelf size	Volume, gross	Power supply	Min. cooling capacity K and M cabinets at -10°C	Min. cooling capacity F cabinets at -30°C	Maximum current amperage	Maximum system pressure	Connection load	Temperature Range Span	Climate class
2/1 GN deep	1,400 l	230V, 50Hz	360 W	700 W	3.1 Ah	90 Bar	720 W	-25/+12°C	5 (max. ambient 40°C w/ 40% RH)

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
1,420 mm	975 mm	2,150 mm	2.98 m3	186 kg	1,380 mm	848 mm	1,950 mm	2,080 mm	2,130 mm	170 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: This cabinet for connection to remote cooling system is on special order only. Please take longer lead times into consideration

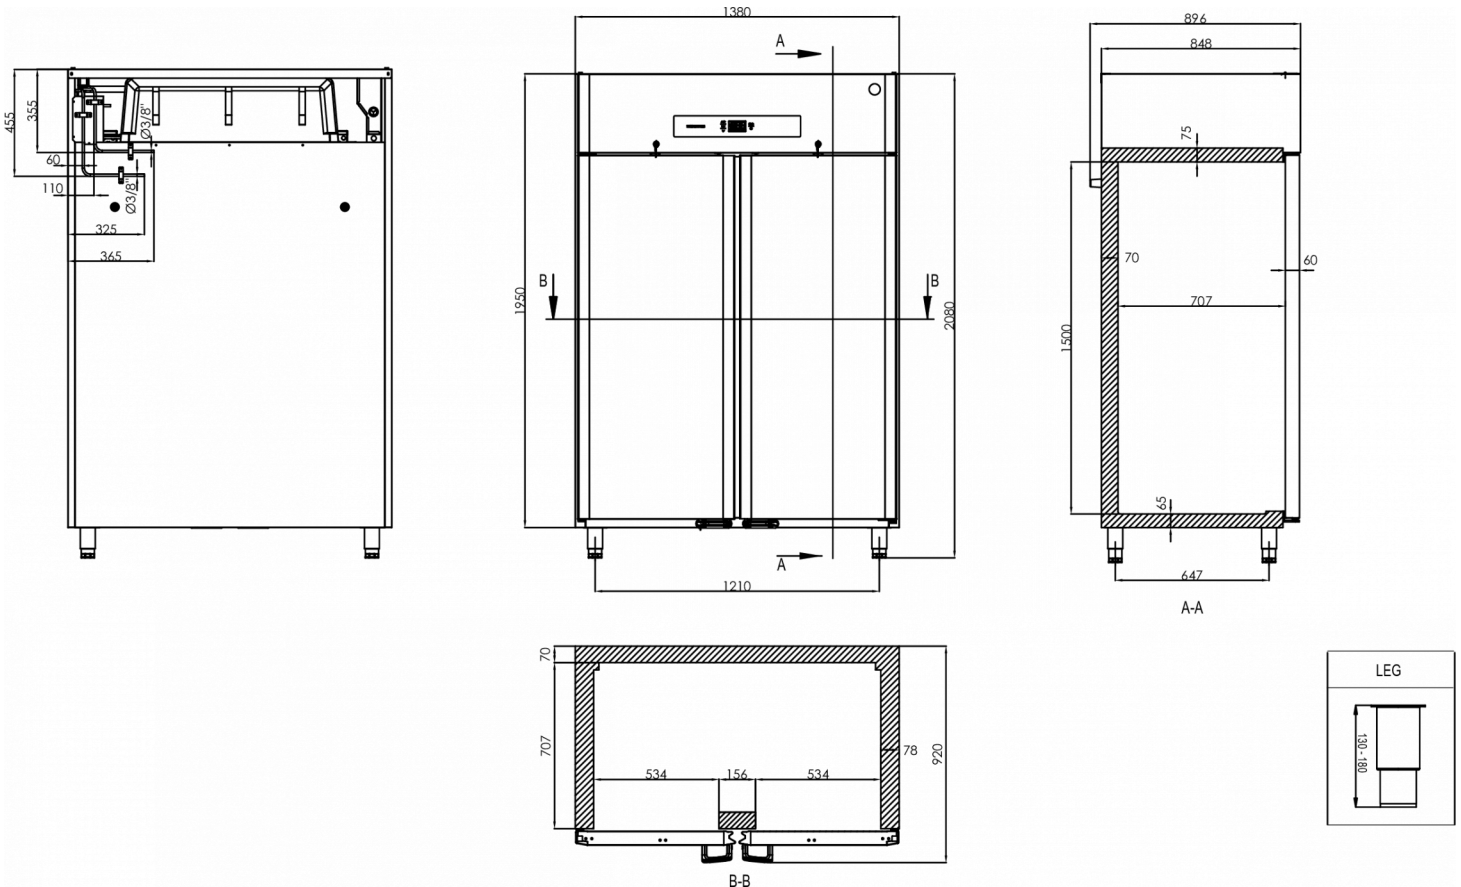

Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)