




# HOSHIZAKI

## Premier U 60 DR CO2

**Refrigerator/Freezer 'U' type without controller (Knockdown) for remote cooling system**



1/1 EN

### ACCESSORIES INCLUDED

4 grey shelves (400 x 600 mm), Pedal door opener with overload protection

### OPTIONAL EXTRAS

Set of legs 130-180 mm  
Grey shelf with back guard  
Stainless shelf with back guard  
Set of 4 stainless shelves with back guard  
Set of 2 shelf supports U shape  
Master key

PRODUCT SERIES: PREMIER 60

ITEM NUMBER: 188601012

COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier U 60 DR CO2 is suitable for the Euronorm 1/1 system (400 x 600 mm). It is for connection to a remote cooling system and is compatible with R744 (CO2) refrigerant. Combine this product with a controller from alternative controller manufacturers. This heavy duty cabinet has a gross volume of 480 ltr. and the height of the cabinet with adjustable legs is 2080-2130mm. Adjustable legs are 130-180 mm. The depth is 848 mm without pedal door opener (920 mm incl. pedal door opener).

#### Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:  
K: +2/+12°C M: -5/+12°C F: -25/-5°C

- For connection to external cooling system and compatible with refrigerant R744 (CO2)
- Prepared for easy integration of installer's preferred controller
- Standard controller display cut-out, size H29 x W71 mm.
- Includes pressure transmitter that however can be replaced by a transmitter of installer's choice.
- Air distribution system
- Automatic fan cut-out when door is opened
- Automatic electric defrost with re-evaporation of defrost water
- Heavy duty cabinet built for climate class 5 cooling system
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- LED lighting on the top panel
- Right hand hinged reversible door
- Door with automatic door closing and lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Comes with power lead

#### WARRANTY PERIOD

1 Year on Parts

#### EXTERIOR

**Stainless steel AISI 304**

#### INTERIOR

**Stainless steel AISI 304**

Refrigerant compatibility: R744

#### CERTIFICATIONS





# HOSHIZAKI

## Premier U 60 DR CO2

### TECHNICAL SPECIFICATIONS


| Shelf size                        | Volume, gross | Power supply | Min. cooling capacity K and M cabinets at -10°C | Min. cooling capacity F cabinets at -30°C | Maximum current amperage | Maximum system pressure | Connection load | Temperature Range Span | Climate class                   |
|-----------------------------------|---------------|--------------|---|---|--------------------------|-------------------------|-----------------|------------------------|---------------------------------|
| Shelf Euronorm 400x600mm   EN 1/1 | 480 l         | 230V, 50Hz   | 300 W   | 376 W                                     | 2.5 Ah                   | 90 Bar                  | 570 W           | -25/+12°C              | 5 (max. ambient 40°C w/ 40% RH) |

### SHIPPING SPECIFICATIONS

| Width (packed) | Depth (packed) | Height (packed) | Volume (packed) | Gross weight | Width  | Depth  | Height including legs (minimum) | Height including legs (maximum) | Net weight |
|----------------|----------------|-----------------|-----------------|--------------|--------|--------|---------------------------------|---------------------------------|------------|
| 670 mm         | 975 mm         | 2,150 mm        | 1.4 m3          | 100 kg       | 610 mm | 848 mm | 2,080 mm                        | 2,130 mm                        | 90 kg      |

**Disclaimer:** Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

**Please observe:** This cabinet for connection to remote cooling system is on special order only. Please take longer lead times into consideration

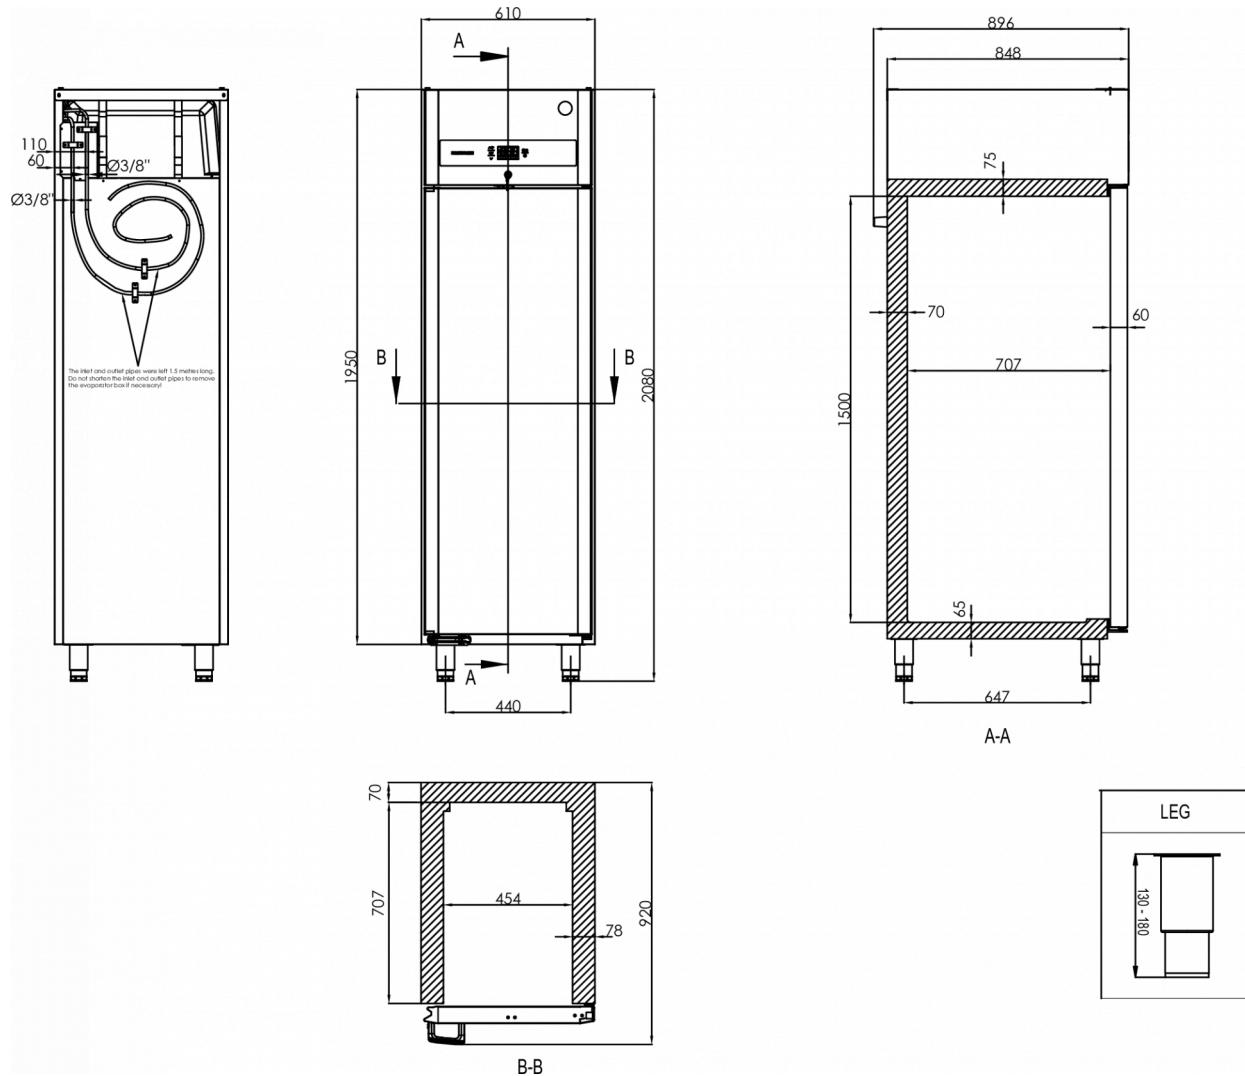

# HOSHIZAKI

Hoshizaki Belgium  
 Hoshizaki Danmark  
 Hoshizaki Deutschland  
 Hoshizaki France  
 Hoshizaki Iberia  
 Hoshizaki Italia  
 Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[soles.ex@hoshizaki-europe.com](mailto:soles.ex@hoshizaki-europe.com)

Hoshizaki Netherlands  
 Hoshizaki Norge  
 Hoshizaki Sverige  
 Hoshizaki UK  
 Export countries  
 Other countries

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
[orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
[uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

**[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)**