



HOSHIZAKI

ADVANCE MD K 180 HG KG E

Multideck refrigerator with Glass Doors and Black and Clear Glass End Panels



PRODUCT SERIES: ADVANCE MD 180

ITEM NUMBER: 211183170

COUNTRY OF ORIGIN: TURKEYE

BRAND: ADVANCE

Hoshizaki Advance MD K 180 HG KG E is a 1800 mm wide multideck refrigerator with glass doors and a shelf load capacity (max) of 60 kg ranking in energy efficiency class B. It has a cabinet height of 2000-2018 mm including levelling feet and depth of 750 mm.

- Ventilated refrigeration system
- Air circulation system
- Hinged glass doors with lock
- Replaceable end panels
- Tempered and durable glass upstand at front side
- Tempered and durable glass side panels (HG and BG models)
- Exterior and interior of stainless steel AISI 304
- Stainless steel adjustable shelf supports (adjustable by max of 2 levels)
- Shelves can be moved two levels up or down (level distance is 25 mm)
- 4 optional angle positions of shelves from horizontal to a max of 75° angle
- LED lighting integrated underneath each shelf
- Control module can be pulled out at the front side
- Automatic defrost with re-evaporation of defrost water
- Drainage connection not needed
- Integrated levelling feet (4) and wheels (4)
- IP2X water protection

ACCESSORIES INCLUDED

8 stainless shelves

OPTIONAL EXTRAS

Price strips, snack baskets, food tray slides

WARRANTY PERIOD

**2 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0,29 kg / CO2 equivalent: 0,87 kg

Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
3.369 kWh/year	B	ISO 23953-1/2:2023	19,56 EEI

CERTIFICATIONS





HOSHIZAKI

ADVANCE MD K 180 HG KG E

TECHNICAL SPECIFICATIONS






Temperature (Class: 3M1 / 3M2)	Shelf size	Maximum shelf distance	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Ref. capacity (at -10°C)
-1/+5°C (Class 3M1)	W 1713 x D 375 mm	350 mm	1.120 l	815 l	230V, 50 Hz	700 W	3 (maximum ambient temperatures of 25 °C with 60% RH)	1.084 W

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1.900 mm	1.000 mm	2.150 mm	4,09 m3	465 kg	1.800 mm	750 mm	2.000 mm	410 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Maximum shelf load	Maximum shelf can load (can = H120 mm x Ø66 mm)	Maximum bottom tray can load (can = H120 mm x Ø66 mm)
60 kg	50 Pc	133 Pc

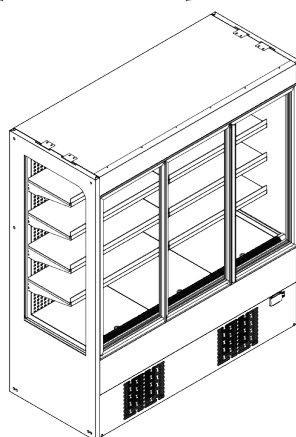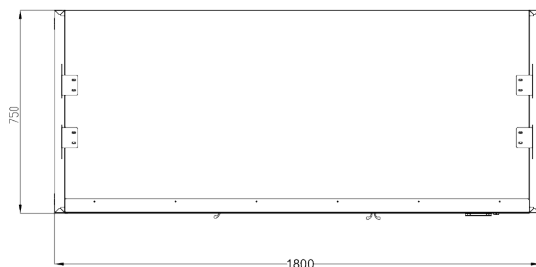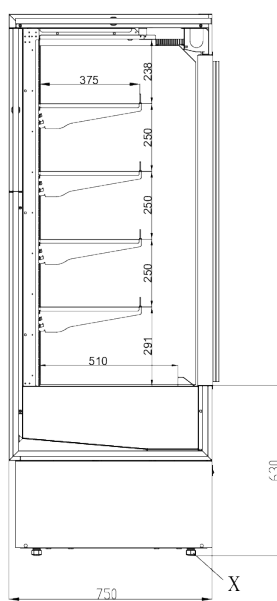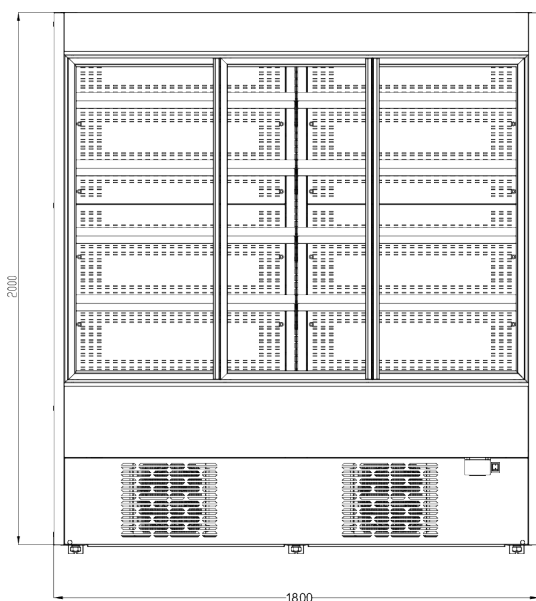

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
order@hoshizaki.se
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com