ADVANCE MD K 150 SW KG E

Multideck refrigerator with Glass Doors and Solid End Panels

PRODUCT SERIES: ADVANCE MD 150
ITEM NUMBER: 221153170
COUNTRY OF ORIGIN: TURKEYE
BRAND: ADVANCE



Hoshizaki Advance MD K 150 SW KG E is a 1500 mm wide multideck refrigerator with glass doors and a shelf load capacity (max) of 50 kg ranking in energy efficiency class C. It has a cabinet height of 2000-2018 mm including levelling feet and depth of 750 mm.

- Ventilated refrigeration system
- Air circulation system
- Hinged glass doors with lock
- Replaceable end panels
- Tempered and durable glass upstand at front side
- Exterior and interior of stainless steel AISI 304
- Stainless steel adjustable shelf supports (adjustable by max of 2 levels)
- Shelves can be moved two levels up or down (level distance is 25 mm)
- 4 optional angle positions of shelves from horizontal to a max of 75° angle
- LED lighting integrated underneath each shelf
- Control module can be pulled out at the front side
- Automatic defrost with re-evaporation of defrost water
- Drainage connection not needed
- Integrated levelling feet (4) and wheels (4)
- IP2X water protection

ACCESSORIES INCLUDED

8 stainless shelves

OPTIONAL EXTRAS

Price strips, snack baskets, food tray slides

WARRANTY PERIOD	EXTERIOR
2 Years on Parts & Labour - based on country agreement	**Stainless steel AISI 304**

INTERIOR
Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0,298 kg / CO2 equivalent: 0,894 kg

Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
2.391 kWh/year	C	ISO 23953-1/2:2023	21,81 EEI

CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001 ISO HOSHIZAKI • ISO 14001 CE

Friday, 30 October 2026, 03:40

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com

ADVANCE MD K 150 SW KG E

TECHNICAL SPECIFICATIONS


Temperature (Class: 3M1 / 3M2)	Shelf size	Maximum shelf distance	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Ref. capacity (at -10°C)
-1/+5°C (Class 3M1)	W 1425 x D 375 mm	350 mm	924 l	670 l	230V, 50 Hz	450 W	3 (maximum ambient temperatures of 25 °C with 60% RH)	822 W


SHIPPING SPECIFICATIONS


Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1.600 mm	1.000 mm	2.150 mm	3,44 m3	390 kg	1.500 mm	750 mm	2.000 mm	340 kg


Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.


Maximum shelf load	Maximum shelf can load (can = H120 mm x Ø66 mm)	Maximum bottom tray can load (can = H120 mm x Ø66 mm)
50 kg	50 Pc	133 Pc

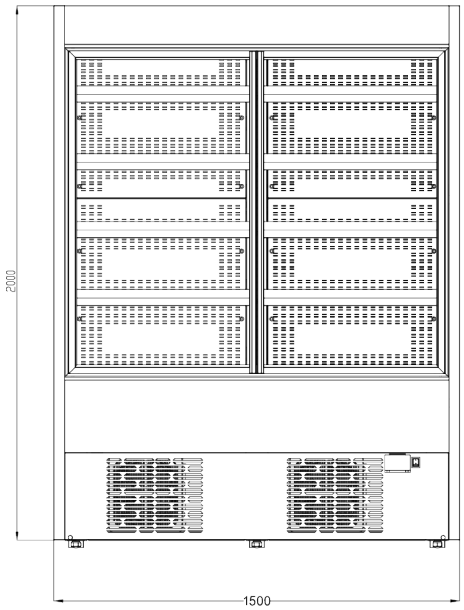

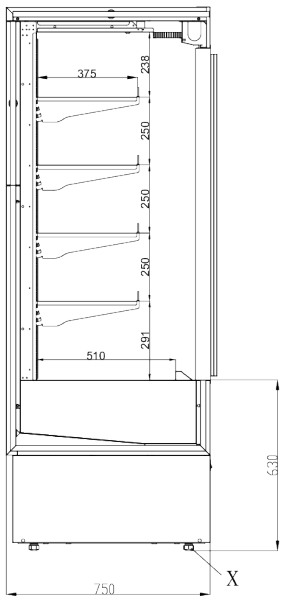



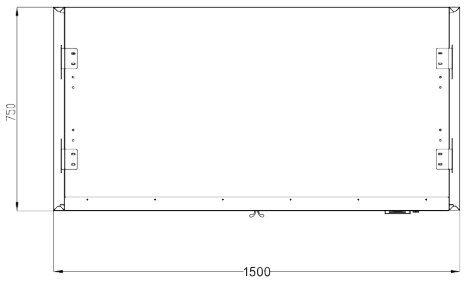

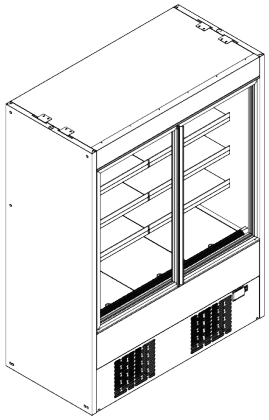

HOSHIZAKI

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com