



HOSHIZAKI

Premier K 3 B DL 2D 2D L E RU1

3-Section Refrigerated Counter with RU1 valve for remote cooling system



PRODUCT SERIES: PREMIER 370
ITEM NUMBER: 311030133101
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier K 3 B DL 2D 2D L E RU1 is a 3-section 1/1 GN refrigerated counter for connection to a remote cooling system. It is equipped with 1 door, 2 drawer sections each with 2 x 1/2 drawers and an insulated board (no worktop) for built-in under existing tabletop. It has a gross volume of 463 ltr. The shelf width is 325 mm.

- For connection to external cooling system and compatible with multiple refrigerants
- Ready-to-install counter with RU1 valve
- Fan assisted cooling
- Automatic defrost with re-evaporation of defrost water
- Built for climate class 5 cooling system enduring up to +40°C / 60%RH ambient temperature
- Exterior and interior of stainless steel AISI 304
- Reversible door
- Drawers with pull-out stop
- Anti-tilt shelves
- Removable magnetic door and drawer gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 21 water protection
- Matching design identity as the Premier cabinets



1 / 1 GN

ACCESSORIES INCLUDED

2 grey shelves per door section

OPTIONAL EXTRAS

Set of legs 100-150 mm
Set of legs 125-200 mm
Set of legs 130-180 mm
Stainless shelf, 325 x 530 mm
Grey shelf, 325 x 530 mm
Shelf supports, 2 of
Door section
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers
Soft-close drawer Conversion Kit (for retrofit)
Flat worktop
Flat worktop with 50 mm splashback
Flat worktop with 100 mm splashback

WARRANTY PERIOD
1 Year on Parts

EXTERIOR
Stainless steel AISI 304

INTERIOR
Stainless steel AISI 304

Refrigerant compatibility: R448A, R449A

CERTIFICATIONS





HOSHIZAKI

Premier K 3 B DL 2D 2D L E RU1

TECHNICAL SPECIFICATIONS

GN tray size	Temperature Range Span	Shelf size	Volume, gross	Climate class
1/1 GN	+2/+12°C	1/1 GN	463 l	5 (max. ambient 40°C w/ 40% RH)




Power supply	Min. cooling capacity K and M cabinets at -10°C	Maximum current amperage	Maximum system pressure	Connection load
230V, 50Hz	250 W	2,7 Ah	90 Bar	620 W

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
1.835 mm	820 mm	985 mm	1,48 m3	112 kg	1.751 mm	680 mm	750 mm	880 mm	930 mm	102 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: This cabinet for connection to remote cooling system is on special order only. Please take longer lead times into consideration

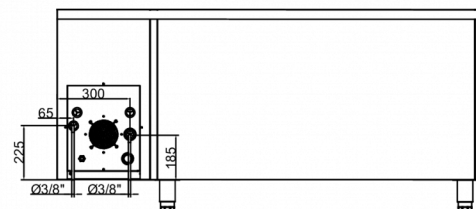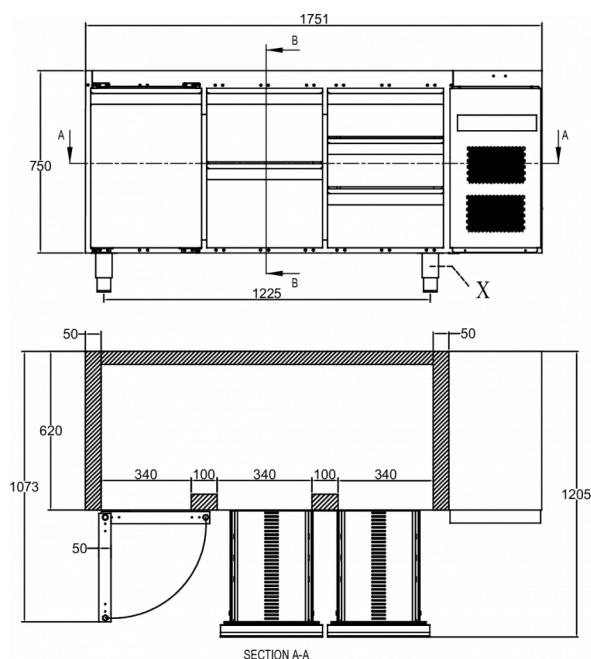


OPTIONS			



HOSHIZAKI

Premier K 3 B DL 2D 2D L E RU1

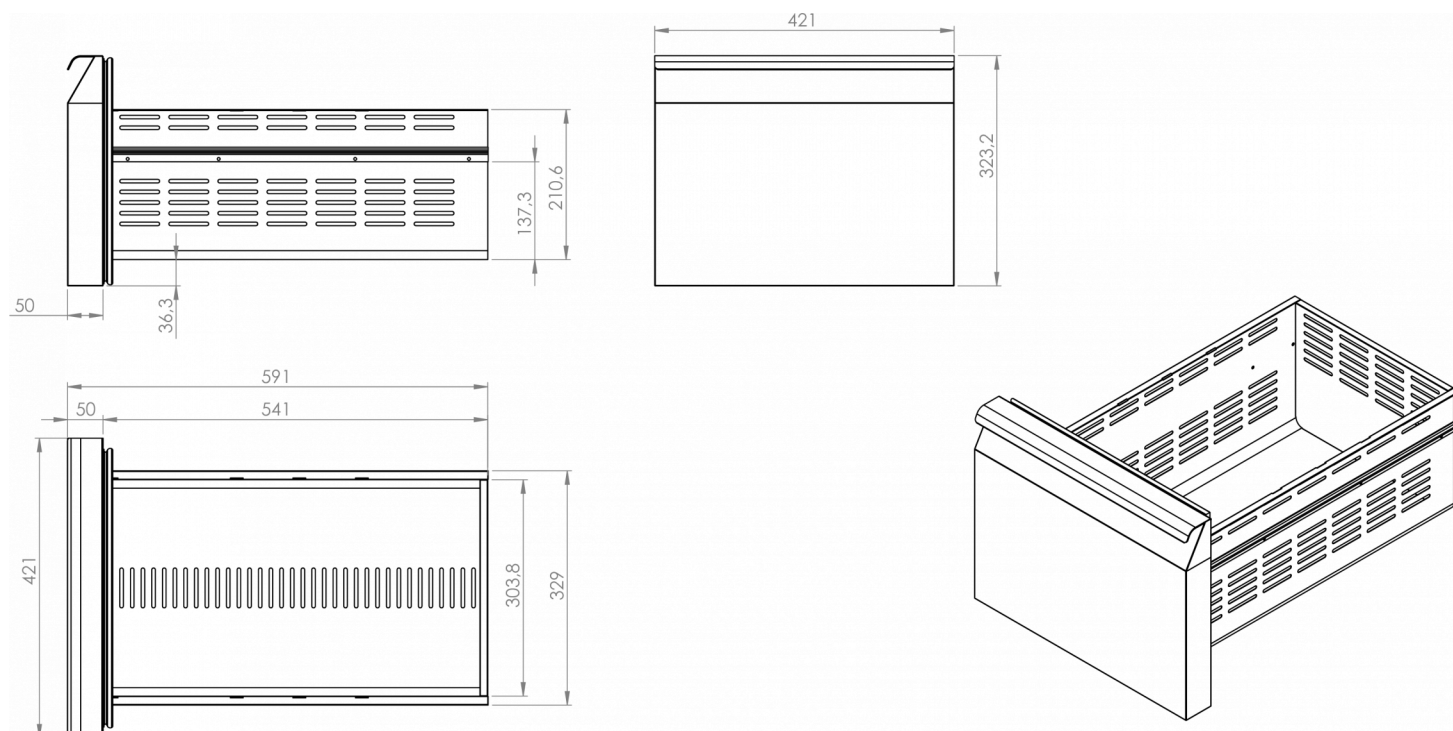

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com