



HOSHIZAKI

PREMIER BCF RI U 100 A 3N DL

Blast Chiller/Freezer



ITEM NUMBER: 5BCA8DCEH-20A3MC

COUNTRY OF ORIGIN: ITALY


PREMIER BCF RI U 100 A 3N DL is a HACCP compliant blast chiller/freezer for applicable for trolley GN1/1 or EN60/40. Chilling/freezing capacity of 100/78 kg. It features a user friendly 7" touch controller display.

The cabinet comes with floor, ramp, controller, external condensate drain tube, WIFI connection, Ethernet door and lock closure,

- 7" touch display with coloured icons
- Cooling functions: Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitation, bottle cooling, pastry, cell sanitization
- 'Hot' functions: Thawing, cell drying
- Choose either time or temperature (probe) controlled chill/freeze cycle
- HACCP data collection
- Customizable parameters
- Multiple and customizable cycle stages
- Adjustable fan speed
- Cycle data and graphs during operation
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- The internal fan section can be opened for cleaning around and behind the unit
- Left hand hinged door (right hand hinged door is optional)
- Heated door perimeter
- Built-in flush-mounted trolleys ramp
- Evaporator with cataphoresis protection against rust
- Rounded internal corners
- Lock closure



1 / 1 GN



1 / 1 EN

COMPATIBLE WITH

Trolley GN1/1 or EN60/40

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

Controller bumper (Accessory)
Internal cell bumpers (Accessory)
Core probe (Accessory)
Standard remote C.U. (Accessory)
Tropicalized remote C.U. (Accessory)
Winter remote CU. (Accessory)
Evaporator module bumper (Add-on) *
Ozone generator (Add-on) *
Right-hand hinged door (Add-on) *
Wooden crate packaging (Add-on) *
Wooden cage packaging (Add-on) *

* Add-on = Order at time of purchase

WARRANTY PERIOD

**3 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.45 kg / CO2 equivalent: 1.35 kg

CERTIFICATIONS





HOSHIZAKI

PREMIER BCF RI U 100 A 3N DL

TECHNICAL SPECIFICATIONS

GN tray size	Temperature range	Power supply	Climate class	Ref. capacity - at -25°C	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
1/1 GN / 400 x 600 mm EN	-40/+40°C	380-420V/3N/50Hz	5 (max. ambient 40°C w/ 40% RH)	7,233 W	100 kg	78 kg


Dimensions internal (W x D x H)

690 mm x 817 mm x 1,881 mm

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Net weight
1,270 mm	1,150 mm	2,527 mm	3.7 m3	410 kg	1,210 mm	1,065 mm	380 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

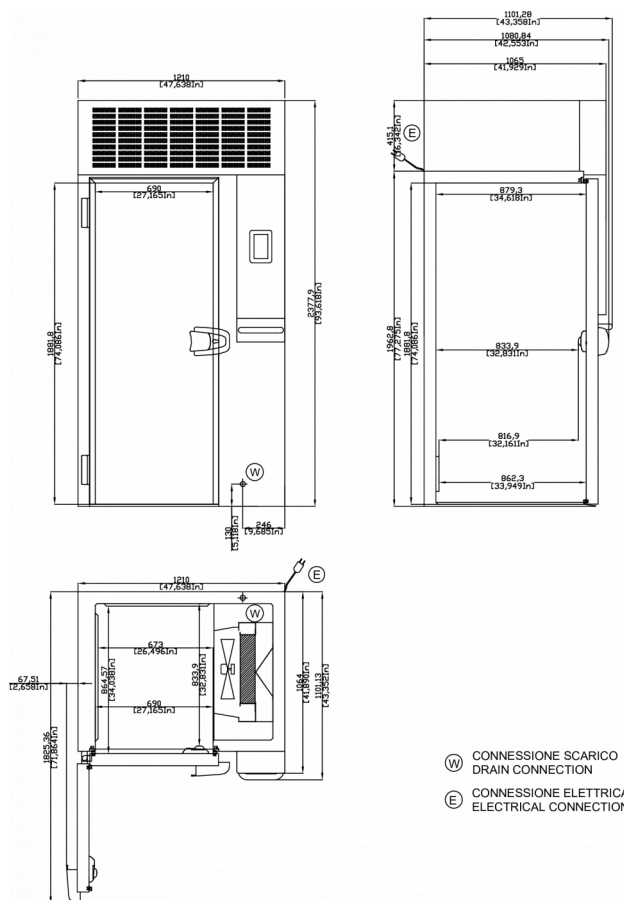

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com