



# HOSHIZAKI

## PREMIER BCF RI U 100 A 3N DL BK

### Roll-in Unibody Blast Chiller/Freezer, Air Cooled



ITEM NUMBER: 5BCA8DQEH-20A3MC  
COUNTRY OF ORIGIN: ITALY

PREMIER BCF RI U 100 A 3N DL BK is a HACCP compliant blast chiller/freezer applicable for trolley GN1/1 or EN60/40. Chilling/freezing capacity of 100/78 kg.

The cabinet comes with floor, ramp, controller, wi-fi connection, Ethernet port, core probe, external condensate drain tube, USB-port and lock closure.

- 7" touch screen controller with coloured icons
- Cooling functions: Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitisation, bottle cooling, pastry, cell sanitisation
- 'Hot' functions: Thawing, cell drying
- Choice of time- or temperature-controlled (probe) chill/freeze cycles
- Single probe cascade cycles, Timer cycles, Quick start
- Heated core probe
- Can be connected to wi-fi
- Ethernet port
- USB-port for HACCP data collection
- Customisable parameters
- Multiple and customisable cycle stages
- Adjustable fan speed
- Operating in ambient temperatures up to +40°C
- Hot gas defrosting
- Front access to electrical box
- Internal fan section can be opened for easy cleaning around and behind
- Left-hand hinged door (right-hand hinged door is optional)
- Heated door perimeter
- Built-in flush-mounted trolley ramp
- Evaporator with cataphoresis coating for rust protection
- Rounded internal corners
- Lock closure

#### COMPATIBLE WITH

Trolley GN1/1 or EN60/40

#### OPTIONAL EXTRAS

- Bumpers \*
- Ozone generator \*
- Right-hand hinged door \*
- Wooden crate packaging \*
- Wooden cage packaging \*

\* Add-on = Must be specified when placing the order

**WARRANTY PERIOD**  
**1 Year on Parts & Labour - based on country agreement**

**EXTERIOR**  
**Stainless steel AISI 304**

**INTERIOR**  
**Stainless steel AISI 304**

Refrigerant type: R290 / Refrigerant: 3 x 0,15 kg / CO2 equivalent: 1.35 kg



# HOSHIZAKI

## PREMIER BCF RI U 100 A 3N DL BK

### TECHNICAL SPECIFICATIONS

Cooling system	Temperature range	Power supply	Connection load (Cold cycles)	Connection load (Hot cycles)	Cooling capacity (evap. -10°C / cond. 45°C)	Climate class	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Air Cooled	-40/+40°C	380-420V/3N/50Hz	4,629 W	1,820 W	7,233 W	5 (max. ambient 40°C w/ 40% RH)	100 kg	78 kg

Sound level	Net weight	Maximum current amperage (Cold cycles)	Maximum current amperage (Hot cycles)	Door clear opening (W x H)	Dimensions internal (W x D x H)	Dimensions external (W x D x H)
70.76 dB(A)	380 kg	11.35 A	11.15 A	673 x 1881,8 mm	690 mm x 817 mm x 1,881 mm	1,210 mm x 1,081 mm x 2,378 mm

### SHIPPING SPECIFICATIONS

Dimensions packed (W x D x H)	Volume (packed)	Gross weight
1,270 mm x 1,150 mm x 2,527 mm	3.7 m <sup>3</sup>	410 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



# HOSHIZAKI

Hoshizaki Belgium [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Danmark [info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
Hoshizaki Deutschland [vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
Hoshizaki France [info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
Hoshizaki Iberia [info@hoshizaki.es](mailto:info@hoshizaki.es)  
Hoshizaki Italia [commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
Hoshizaki Middle East [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)


Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)



# HOSHIZAKI

## PREMIER BCF RI U 100 A 3N DL BK

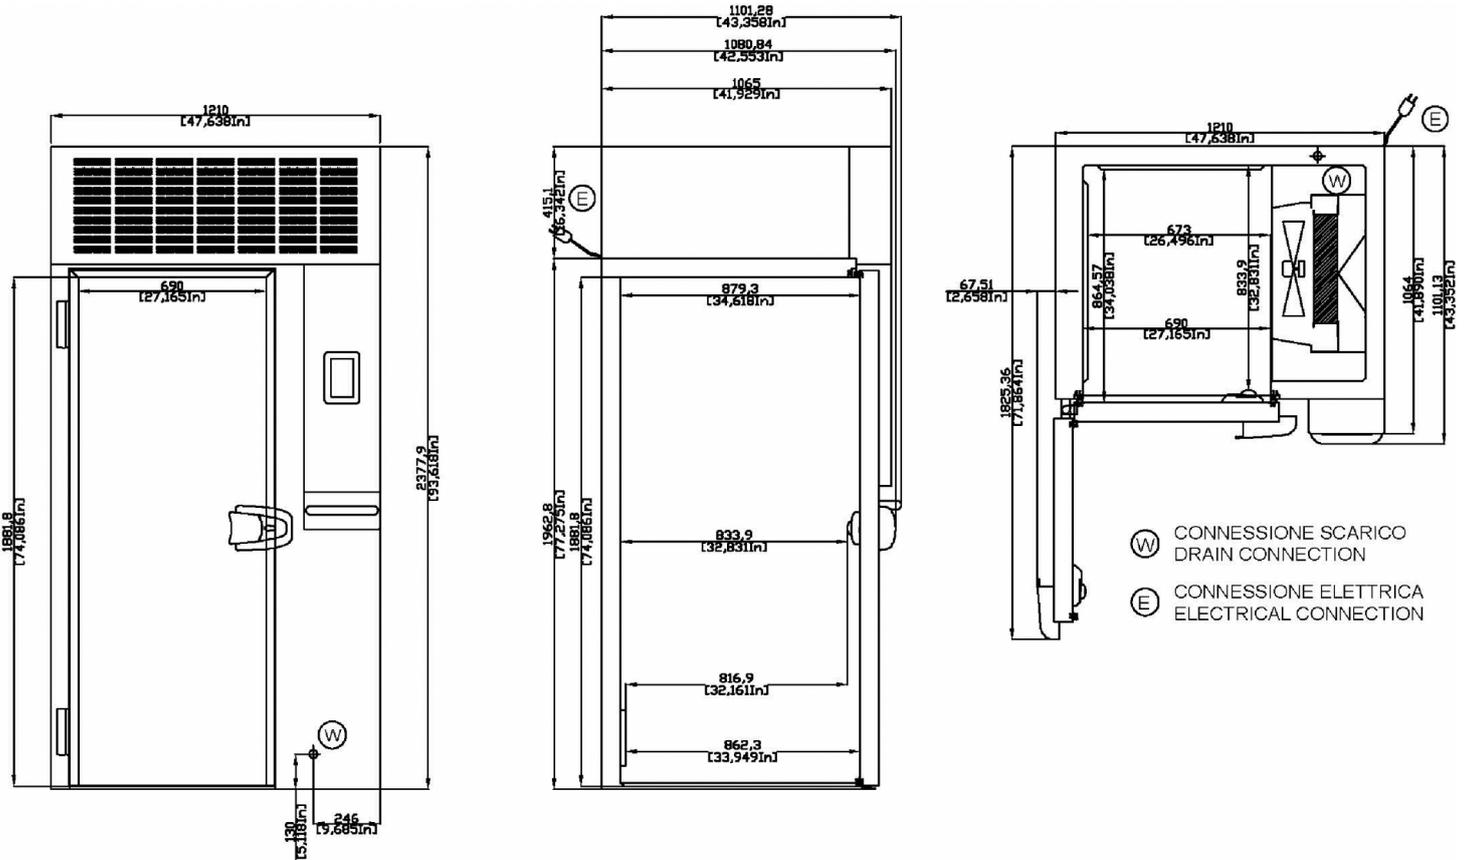

Hoshizaki Belgium [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
 Hoshizaki Danmark [info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
 Hoshizaki Deutschland [vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
 Hoshizaki France [info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
 Hoshizaki Iberia [info@hoshizaki.es](mailto:info@hoshizaki.es)  
 Hoshizaki Italia [commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
 Hoshizaki Middle East [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
 Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
 Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
 Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
 Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
 Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)