



# HOSHIZAKI

## PREMIER BCF RI M 300 CO2 1N DL BK NSF

### Roll-in Blast Chiller/Freezer. Made in Panels. For CO2 cooling system



ITEM NUMBER: 5BMA8DQRH-F2A3QC  
COUNTRY OF ORIGIN: ITALY

PREMIER BCF RI M 300 CO2 1N DL BK NSF is a HACCP compliant blast chiller/freezer applicable for trolley GN1/1, EN60/40 or GN2/1, EN60/80. Chilling/freezing capacity of 300/200 kg.

The cabinet comes with floor, ramp, controller, wi-fi connection, Ethernet port, core probe, external condensate drain tube, USB-port and lock closure.

- Supplied unassembled on pallets
- 7" touch screen controller with coloured icons
- Cooling functions: Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitisation, bottle cooling, pastry, cell sanitisation
- 'Hot' functions: Thawing, cell drying
- Choice of time- or temperature-controlled (probe) chill/freeze cycles
- Single probe cascade cycles, Timer cycles, Quick start
- Heated core probe
- Can be connected to wi-fi
- Ethernet port
- USB-port for HACCP data collection
- Customisable parameters
- Multiple and customisable cycle stages
- Adjustable fan speed
- Operating in ambient temperatures up to +40°C
- Hot gas defrosting
- Front access to electrical box
- Internal fan section can be opened for easy cleaning around and behind
- Left-hand hinged door (right-hand hinged door is optional)
- Heated door perimeter
- Trolley ramp
- Evaporator with cataphoresis coating for rust protection
- Rounded internal corners
- Lock closure
- Main power switch
- Extra drip collection tray
- Smart connectors for seamless installation and interconnection with other products in the range

#### COMPATIBLE WITH

Trolleys 4 x GN1/1, 2 x GN2/1 or 4 x EN60/40, 2 x EN60/80

#### OPTIONAL EXTRAS

- Bumpers \*
- Ozone generator \*
- Pre-painted exterior cabinet \*
- Remote controller \*
- Right-hand hinged door (Add-on) \*
- Pass through with two doors \*
- Cabinet without floor \*
- Cabinet with nonslip floor \*
- Wooden crate packaging (Add-on) \*
- Wooden cage packaging (Add-on) \*

\* Add-on = Must be specified when placing the order

**WARRANTY PERIOD**  
**1 Year on Parts & Labour -  
based on country agreement**

**EXTERIOR**  
**Stainless steel AISI 304**

**INTERIOR**  
**Stainless steel AISI 304**

Refrigerant compatibility: R744



# HOSHIZAKI

## PREMIER BCF RI M 300 CO2 1N DL BK NSF

### TECHNICAL SPECIFICATIONS

Cooling system	Temperature range	Climate class	Power supply	Required cooling capacity	Connection load	Fuse Rating	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
For remote cooling system	-40/+40°C	5 (max. ambient 40°C w/ 40% RH)	380-420V/3N/50Hz	37,000 W	1,126 W	25 A	300 kg	200 kg

Net weight	Door clear opening (W x H)	Dimensions internal (W x D x H)	Dimensions external (W x D x H)
650 kg	800 x 1850 mm	800 mm x 2,100 mm x 1,850 mm	1,500 mm x 2,450 mm x 2,395 mm

### SHIPPING SPECIFICATIONS

Dimensions packed (W x D x H)	Dimensions packed, second parcel (W x D x H)	Volume (packed)	Gross weight
1,050 mm x 2,270 mm x 560 mm	1,570 mm x 2,250 mm x 1,300 mm	7.3 m3	600 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Supplied unassembled on pallets



# HOSHIZAKI

Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)





Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)



# HOSHIZAKI

## PREMIER BCF RI M 300 CO2 1N DL BK NSF

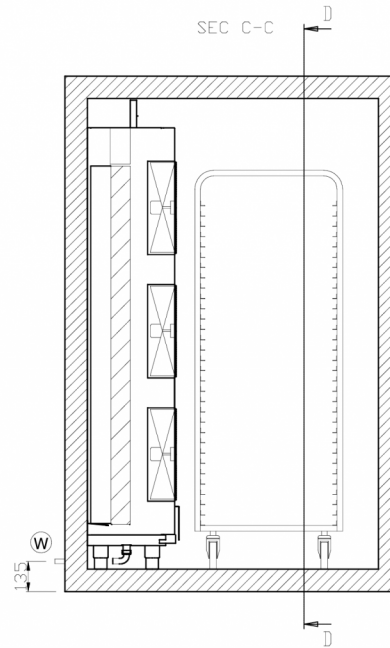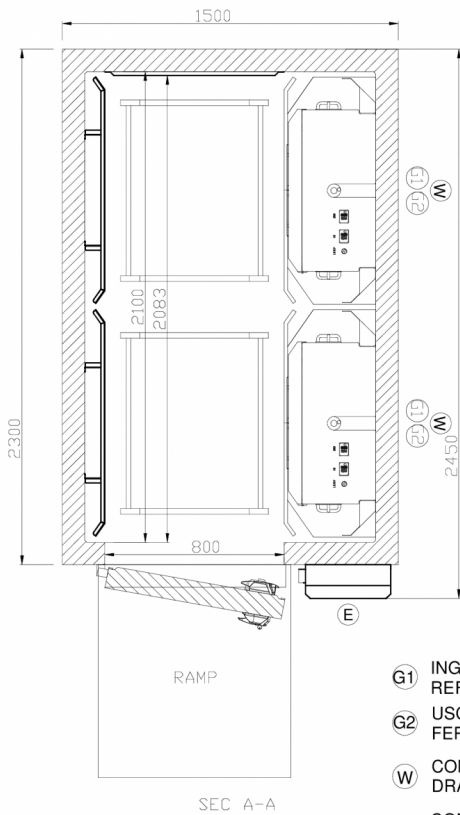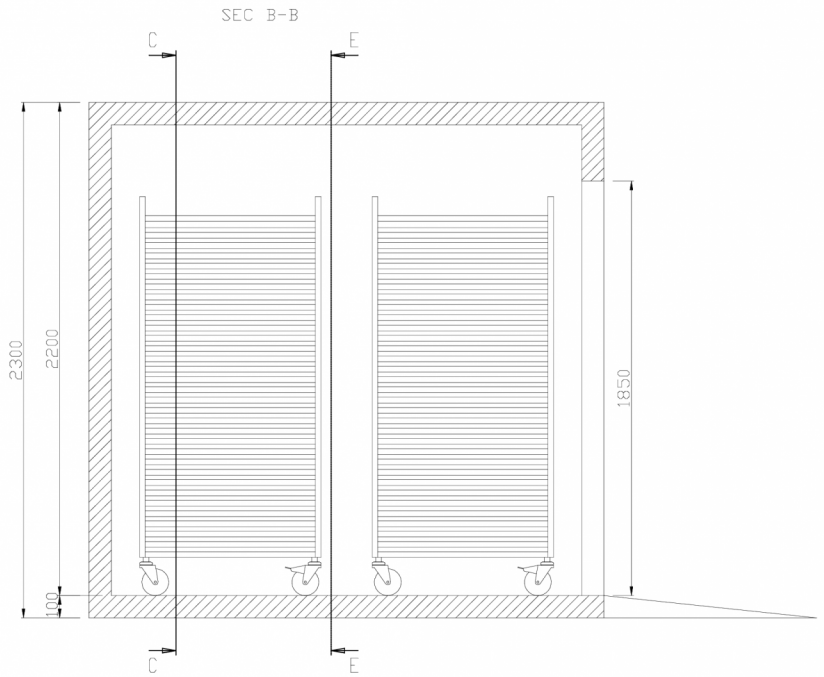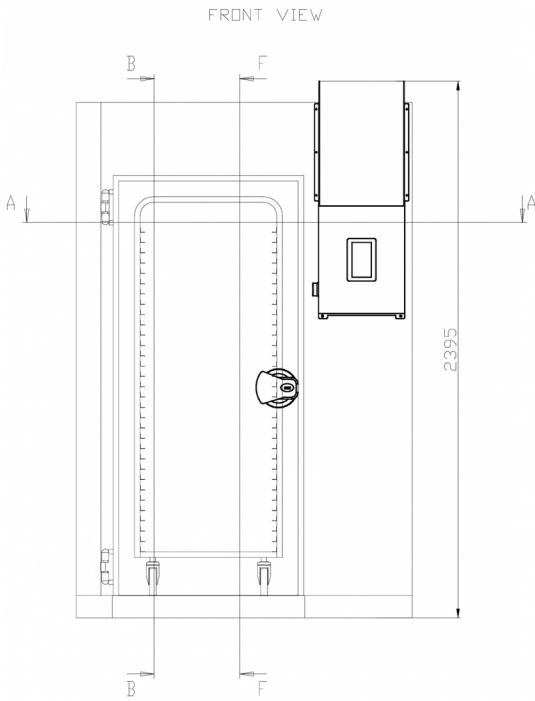

- Ⓜ1 INGRESSO REFRIGERANTE Ø16mm - CO2 Ø10mm  
REFRIGERANT INLET Ø16mm - CO2 Ø10mm
- Ⓜ2 USCITA REFRIGERANTE Ø28mm - CO2 Ø16mm  
REFRIGERANT OUTLET Ø28mm - CO2 Ø16mm
- Ⓜ CONNESSIONE SCARICO Ø1"  
DRAIN CONNECTION Ø1"
- Ⓜ E CONNESSIONE ELETTRICA  
ELECTRICAL CONNECTION



# HOSHIZAKI

Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)