




HOSHIZAKI

PREMIER KPS 42 SGR

Blast Chiller/Freezer Compatible with Rational Oven SCC101



1 / 1 GN



600 x 400 EN

COMPATIBLE WITH

Rational oven SCC101

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

N/A

PRODUCT SERIES: KPS 42

ITEM NUMBER: 875780560

COUNTRY OF ORIGIN: ITALY

PREMIER KPS 42 SGR is a HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 10). Chilling/freezing capacity of 50/25kg. It features IFR control system and a user friendly 7" touch display. Use the preset programs or store your customized cycles. Adjustable legs (105-150mm).

- Compatible with Rational oven SCC101
- 7" touch display with coloured icons
- USB port for download of cooling log data
- Cooling functions: Chilling (soft/hard), freezing (soft/hard), preservation, precooling, infinity
- 'Hot' functions: Thawing, proofing, retarder-prover
- Choose either IFR operation, time or temperature controlled chill/freeze cycle
- Prevent surface freezing damage with the IFR blast chilling function
- Triple-point probe (3 measuring points)
- HACCP: Infinite events up to one year of recording
- Audio-visual HACCP alarms for power failure or if temperature limit is exceeded
- Alarms: Saving up to 40 events
- 10 programs for blast chilling, blast freezing and retarder proving
- Up to 20 customized cycles can be stored
- Automatic shift to 'storage mode' after the chilling process
- Automatic fan cut-out when door is opened
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Automatic defrosting
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 10
- Internal fan section can be opened for cleaning around / behind unit
- Right hand hinged door
- Full-height integrated handle
- 90° self-closing door system
- Removable magnetic door gasket

WARRANTY PERIOD

3 Years on Parts & Labour - based on country agreement

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0,3 kg / CO2 equivalent: 0,9 kg

CERTIFICATIONS



| Energy consumption - Chilling (kWh/kg) | Energy Consumption - Freezing (kWh/kg) |
|--|--|
| 0,078 kWh/kg | 0,27 kWh/kg |

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com



HOSHIZAKI

PREMIER KPS 42 SGR

TECHNICAL SPECIFICATIONS

| Cooling system | GN tray size | Temperature range | Power supply | Connection load | Fuse Rating | Ref. capacity (at -25°C) | Chilling capacity (from +70°C to +3°C in 90 minutes) | Freezing capacity (from +70°C to -18°C in 4 hours) |
|-------------------------|--------------------------|-------------------|-----------------|-----------------|-------------|--------------------------|--|--|
| Built-in cooling system | 1/1 GN / 400 x 600 mm EN | -40/+45°C | 400V, 3N-/50 Hz | 1.800 kW | 16 A | 1.900 W | 50 kg | 25 kg |

| Climate class | Sound level | Net weight | Maximum depth of gastro pans, GN/EN | Height from base to first guide | Height from ceiling to top guide | Distance between guide positions, GN/EN | Height including legs (minimum) | Height including legs (maximum) | Dimensions internal (W x D x H) | Dimensions external (W x D x H) |
|---------------------------------|-------------|------------|-------------------------------------|---------------------------------|----------------------------------|---|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| 5 (max. ambient 40°C w/ 40% RH) | 64 dB(A) | 175 kg | 325/400 | 61 mm | 74,5 mm | 530/600 | 1.737 mm | 1.782 mm | 645 mm x 702 mm x 780 mm | 801,5 mm x 951 mm x 1.632 mm |

SHIPPING SPECIFICATIONS

| Dimensions packed (W x D x H) | Volume (packed) | Gross weight |
|-------------------------------|----------------------|--------------|
| 874 mm x 990 mm x 2.054 mm | 1,777 m ³ | 200 kg |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com


Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com



HOSHIZAKI

PREMIER KPS 42 SGR

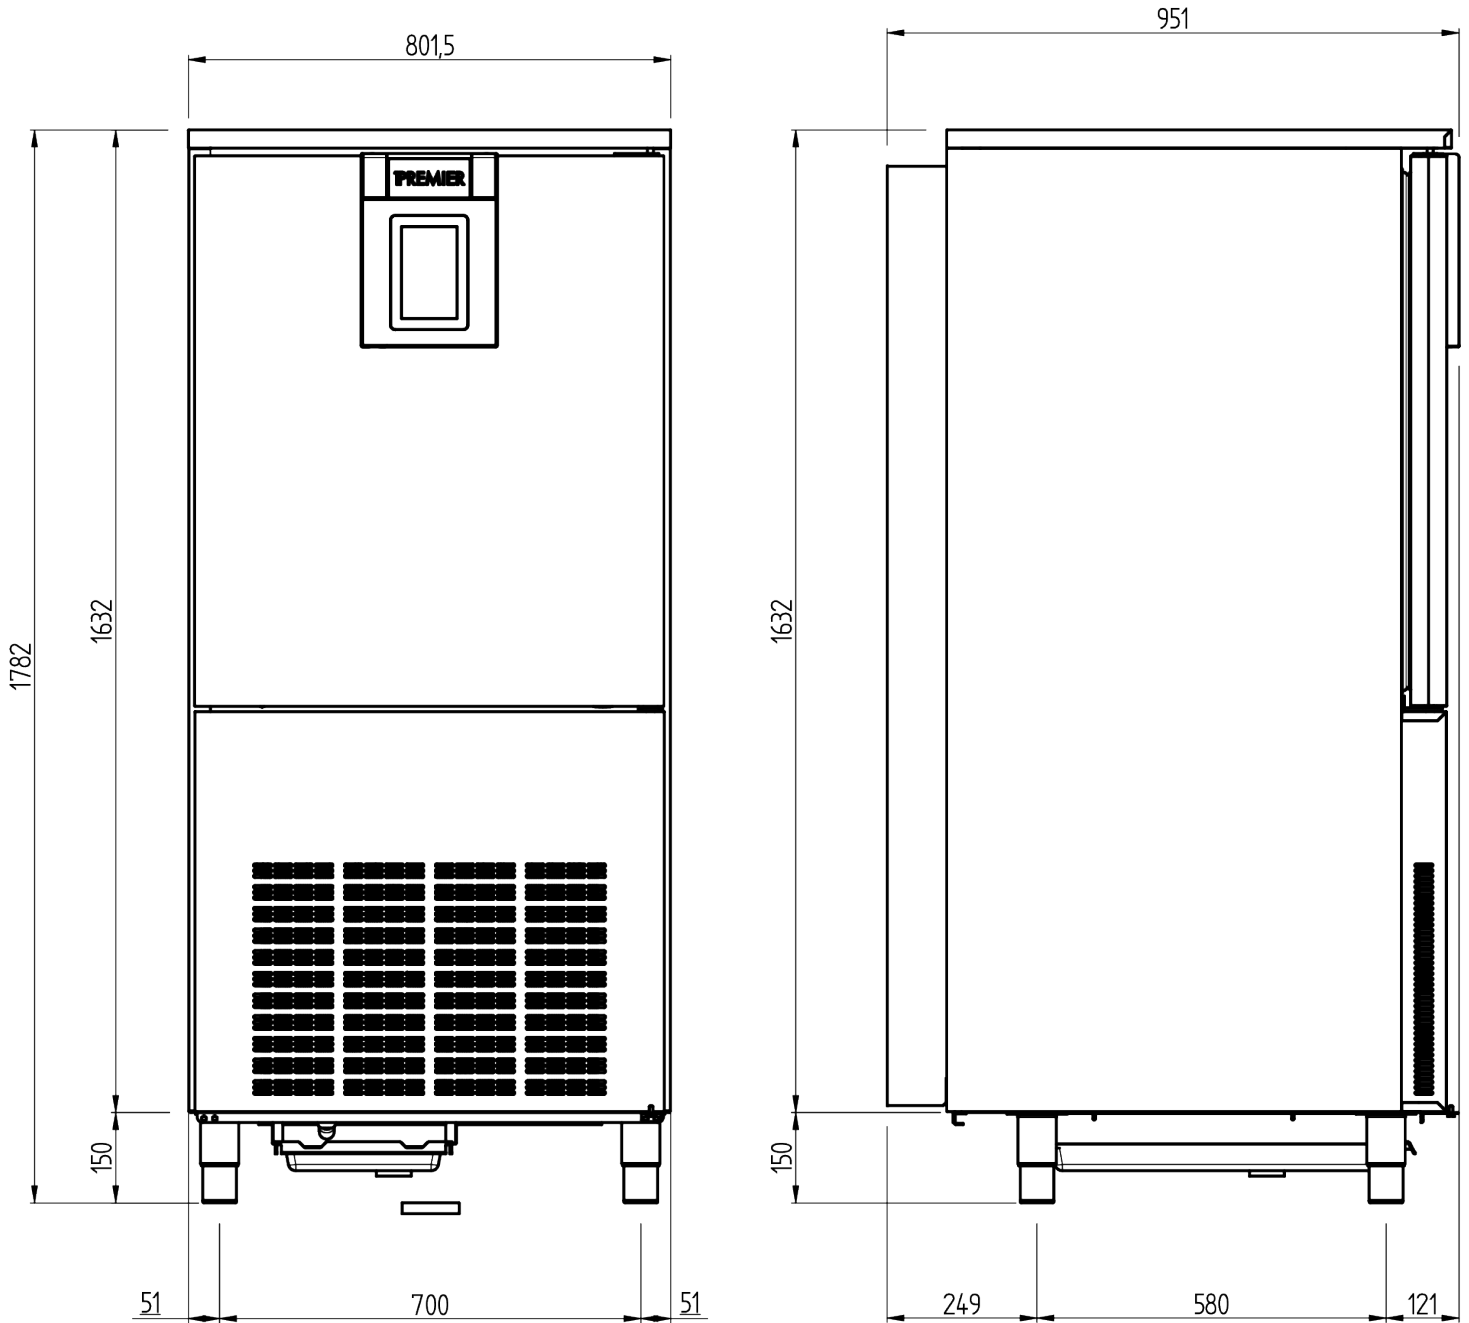

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com