



HOSHIZAKI

ADVANCE ACR-180DG-LRR-RRS-L1

3-Section Refrigerated Counter



PRODUCT SERIES: ADVANCE
ITEM NUMBER: 889020844
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Advance ACR-180DG-LRR-RRS-L1 is a 3-section 1/1 GN refrigerated counter with three doors and a flat worktop with 100 mm splashback. It has a net usable volume of 257 ltr. The height excluding is 800 mm, legs = H 130/180 mm (L1).

- Fan assisted cooling
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel
- Compartmentalized cooling unit that is available as one unit
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Reversible doors
- Anti-tilt shelves
- Removable magnetic door gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 21 water protection
- Matching design identity as the Advance cabinets



1 / 1 GN

ACCESSORIES INCLUDED

2 grey shelves per section

OPTIONAL EXTRAS

Set of legs for 835-900 mm Counter-top (L2)
Set of 4 Castors for 850 mm Counter-top (C1)
Set of 4 Castors for 900 mm Counter-top (C2)
Castor Extension Kit (extends height of castors by 50mm)
Flat worktop
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers *
Shelf support - Left
Shelf support - Right
Stainless shelf
Grey shelf

* 3 drawer section is not available next to the compressor housing

WARRANTY PERIOD

**5 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless Steel

INTERIOR

Stainless

Refrigerant type: R290 / Refrigerant: 0.079 kg / CO2 equivalent: 0.237 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
927 kWh/year	C	ISO 22041-2019	37.89 EEI



HOSHIZAKI

ADVANCE ACR-180DG-LRR-RRS-L1



TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity - at -10°C
-2/+8°C	1/1 GN	457 l	257 l	230V, 50Hz	240 W	5 (max. ambient 40°C w/ 40% RH)	53 dB	446 W


SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height including legs (minimum)	Height including legs (maximum)	Net weight
1,830 mm	760 mm	1,130 mm	1.58 m ³	142 kg	1,780 mm	700 mm	930 mm	980 mm	130 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

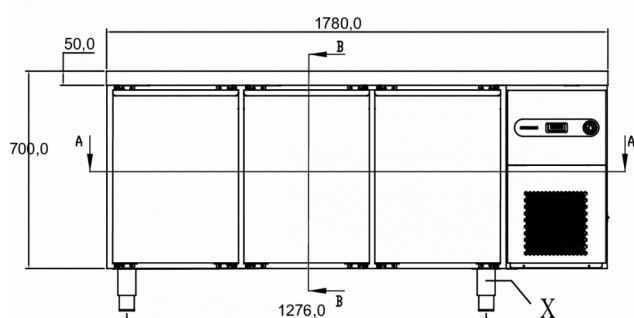


SECTION B-B

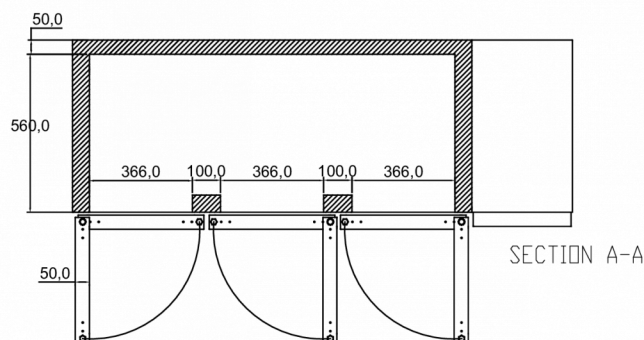


SECTION A-A

OPTIONS (TABLETOP)



OPTIONS (LEG / CASTOR)



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com