KM-80C-HC

Crescent Ice Maker, Self Contained

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 75
Storage bin capacity: 34 kg



PRODUCT SERIES: CRESCENT ICEMAKERS
ITEM NUMBER: F160-C141
COUNTRY OF ORIGIN: CHINA


Hoshizaki KM-80C-HC is a self-contained ice maker producing up to 75 kg of crescent EDGE ice per 24 hours.

Crescent EDGE ice dimensions and weight - disclaimer: The drawing is for illustration purposes only. Size and weight may be differ due to local installation conditions.

- CycleSaver® technology with doublesided stainless steel evaporator which produces ice on both sides
- Stainless steel evaporator allow the use of mineral removal deposit removal chemical. No 'flaking' of the evaporator
- EverCheckTM Control Board with audible alarm and diagnostic features
- Hygiene feature: Automatic and manual water cleaning - cleaning of the water circuit with fresh water for every 20 cycles
- Hygiene feature: Sanitation mode that automatically cleans and refreshes the water circuit after 4 hours of continued inactivity
- Ice making system with an automatic rinse cycle
- Fresh water every 10, 5, 2 or 1 cycle (10 is factory standard)
- Closed water circuit for contamination protection
- DC pump for variable water flow
- Water level is controlled by float switch (no water waste)
- Electronic controller at outside front panel
- Cleanable air filter
- Removable door gasket

ICE TYPE: Crescent Edge





KM Edge Cube
Weight: 10 g

WARRANTY PERIOD
2 Years on Parts & Labour - based on country agreement

EXTERIOR
Stainless steel AISI 441, Galvanized steel (Rear), Plastic (Louver)

Refrigerant type: R290 / Refrigerant: 0,147 kg / CO2 equivalent: 0,51 kg

OPERATING CONDITIONS
Ambient temperature (minimum): 7 °C, Ambient temperature (maximum): 38 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 7 °C, Water supply temperature (maximum): 32 °C, Voltage range (Rated Voltage): ±6%

ACCESSORIES INCLUDED
Legs, Scoop

OPTIONAL EXTRAS
4HC-H water filtration, UV-LED for the water tank

CORRESPONDING WATER FILTERS
4HC-H Single Water Filter, 4HC Replacement Cartridge


CERTIFICATIONS

Tuesday, 3 November 2026, 15:30

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com

KM-80C-HC

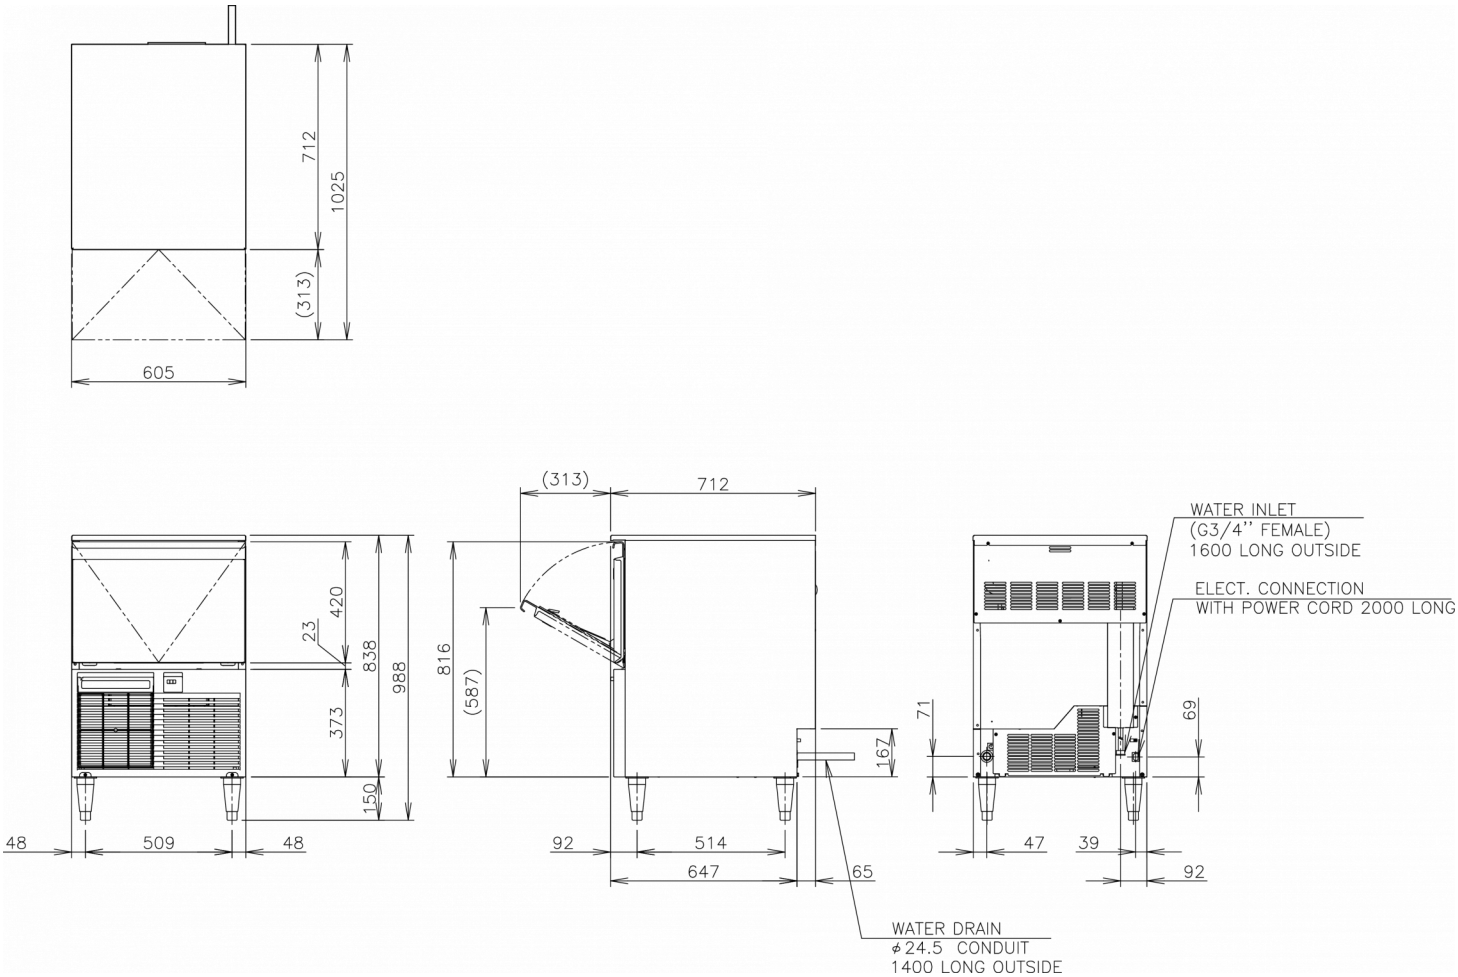

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,314 kW	5 A	0,82 kW	75	68	55	0,43

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Dimensions legs	Net weight
700 mm	805 mm	996 mm	0,561 m3	63 kg	605 mm	712 mm	838 mm	For legs add 144-167mm	50 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

HOSHIZAKI

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com