
HNC-180BE-L-BLH


Sushi display case with LED lighting, left-sided

PRODUCT SERIES: HNC 180
ITEM NUMBER: S055-C174
COUNTRY OF ORIGIN: JAPAN









This Hoshizaki HNC-180BE-L-BLH is a Sushi Case with condenser unit on the left (left-sided). It has a net volume of 72 ltr. and a cabinet width of 1800 mm. Equipped with a sliding door with 150 mm height towards the operator, LED lighting, thermometer and lightweight ABS trays.

- Self-contained unit
- Refrigerated glass display
- Top glass angles down, allowing for plate space on top of units
- Antiscattering film on glass
- Smooth airflow, without forced air-circulation
- Condenser airflow is in the back and out the side
- Large condenser face improves cooling performance
- The tubular-shaped evaporator absorbs the heat continuously (no dripping)
- Solid food trays with radius groove to fit sushi foods
- The elevated side wings of the trays allow more air circulation
- LED lighting
- Thermometer inside the cabinet
- The sliding door and the ABS trays are easily disassembled and removed for daily cleaning.
- Not intended to be used as a cooling storage cabinet.

ACCESSORIES INCLUDED

ABS tray (large) x 4, ABS tray (small) x 1

OPTIONAL EXTRAS

N/A

WARRANTY PERIOD
2 Years on Parts & Labour - based on country agreement

EXTERIOR
Clear Glass, ABS Plastic, PVC Plastic

INTERIOR
Clear Glass, ABS Plastic, Stainless Steel

Refrigerant type: R600a / Refrigerant: 0,046 kg / CO2 equivalent: 0,138 kg / GWP: 3 GWP

OPERATING CONDITIONS


Ambient temperature (minimum): 10 °C, Ambient temperature (maximum): 30 °C

CERTIFICATIONS

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com

HNC-180BE-L-BLH

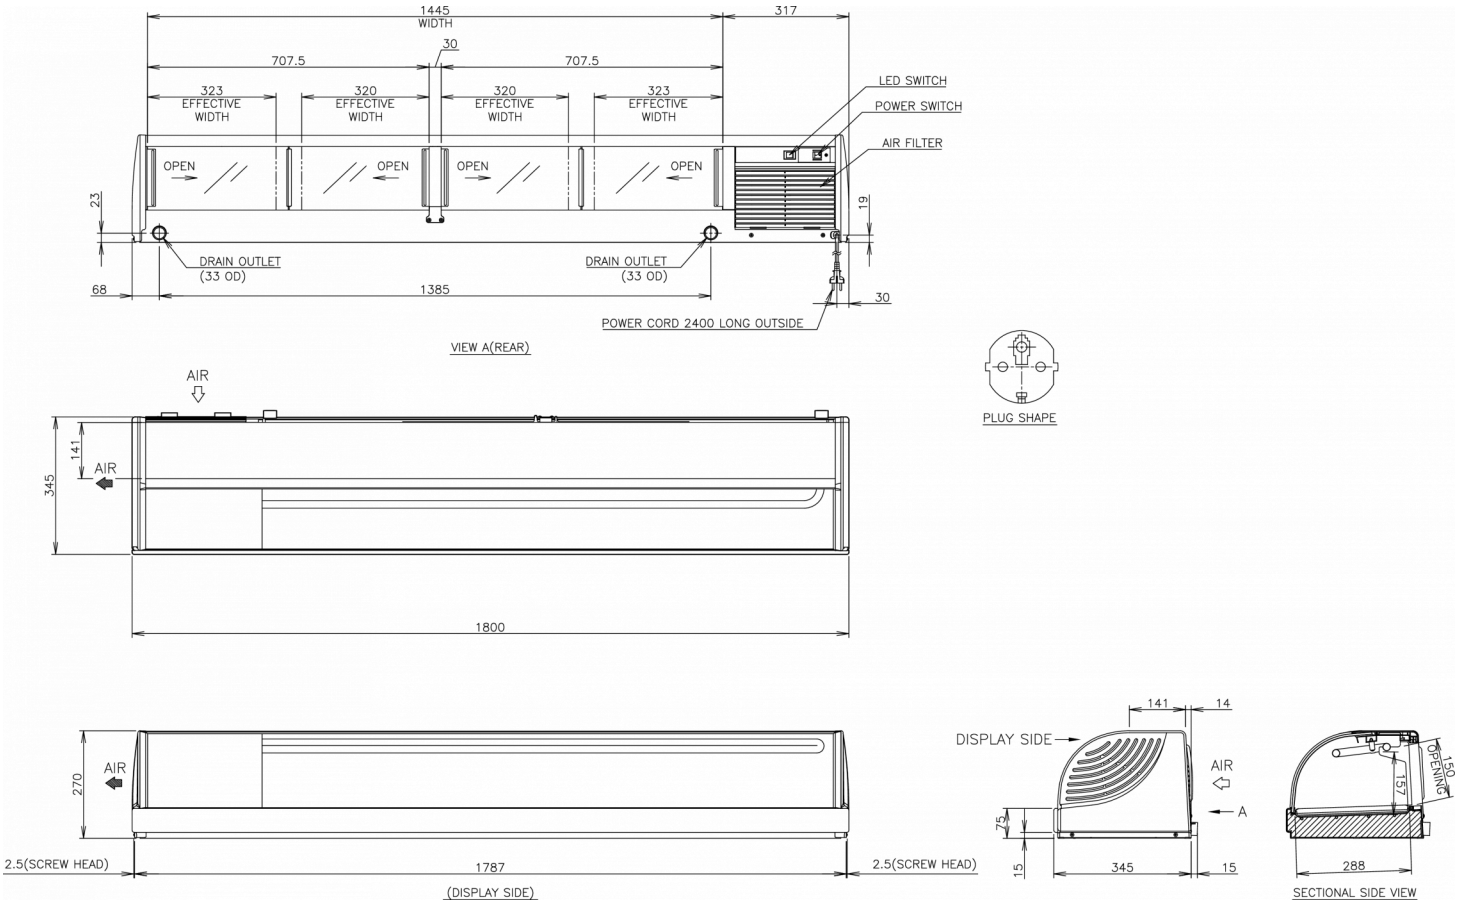

TECHNICAL SPECIFICATIONS

Cooling system	Temperature retention (6h)	Power supply	Connection load	Electric Consumption	Heat Rejection (AT 32°C, WT 21°C)
Built-in cooling system	5 °C	1/220 - 240V/50Hz	150 W	0,15 kW	0,42 kW

Volume, net	Dimensions internal (W x D x H)	Compressor	LED
72 l	845 mm x 288 mm x 157 mm	Left side	Including LED

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1.880 mm	415 mm	517 mm	0,403 m3	60 kg	1.800 mm	345 mm	270 mm	42 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Allow 10mm extra space at the installation site to meet anyinstallation requirements (additional spacing is also required for proper airflow and pipe connections).

HOSHIZAKI

Hoshizaki Belgium	info@hoshizaki.nl
Hoshizaki Danmark	info@hoshizaki.dk
Hoshizaki Deutschland	vertrieb@hoshizaki.de
Hoshizaki France	info@hoshizaki.fr
Hoshizaki Iberia	info@hoshizaki.es
Hoshizaki Italia	commerciale@hoshizaki.it
Hoshizaki Middle East	sales.ex@hoshizaki-europe.com
Hoshizaki Netherlands	info@hoshizaki.nl
Hoshizaki Norge	salg@hoshizaki.no
Hoshizaki Sverige	order@hoshizaki.se
Hoshizaki UK	uksales@hoshizaki.uk
Export countries	sales.ex@hoshizaki-europe.com
Other countries	sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com