
HNC-210BE-L-BLH


Sushi display case with LED lighting, left-sided

PRODUCT SERIES: HNC 210
ITEM NUMBER: S057-C174
COUNTRY OF ORIGIN: JAPAN









This Hoshizaki HNC-210BE-L-BLH is a Sushi Case with condenser unit on the left (left-sided). It has a net volume of 87 ltr. and a cabinet width of 2100 mm. Equipped with a sliding door with 150 mm height towards the operator, LED lighting, thermometer and lightweight ABS trays.

- Self-contained unit
- Refrigerated glass display
- Top glass angles down, allowing for plate space on top of units
- Antiscattering film on glass
- Smooth airflow, without forced air-circulation
- Condenser airflow is in the back and out the side
- Large condenser face improves cooling performance
- The tubular-shaped evaporator absorbs the heat continuously (no dripping)
- Solid food trays with radius groove to fit sushi foods
- The elevated side wings of the trays allow more air circulation
- LED lighting
- Thermometer inside the cabinet
- The sliding door and the ABS trays are easily disassembled and removed for daily cleaning.
- Not intended to be used as a cooling storage cabinet.

WARRANTY PERIOD
2 Years on Parts & Labour - based on country agreement

EXTERIOR
Clear Glass, ABS Plastic, PVC Plastic

INTERIOR
Clear Glass, ABS Plastic, Stainless Steel

Refrigerant type: R600a / Refrigerant: 0,048 kg / CO2 equivalent: 0,144 kg / GWP: 3 GWP

OPERATING CONDITIONS
Ambient temperature (minimum): 10 °C, Ambient temperature (maximum): 30 °C

ACCESSORIES INCLUDED

ABS tray (large) x 5, ABS tray (small) x 1

OPTIONAL EXTRAS

N/A


CERTIFICATIONS

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com

HOSHIZAKI

HNC-210BE-L-BLH

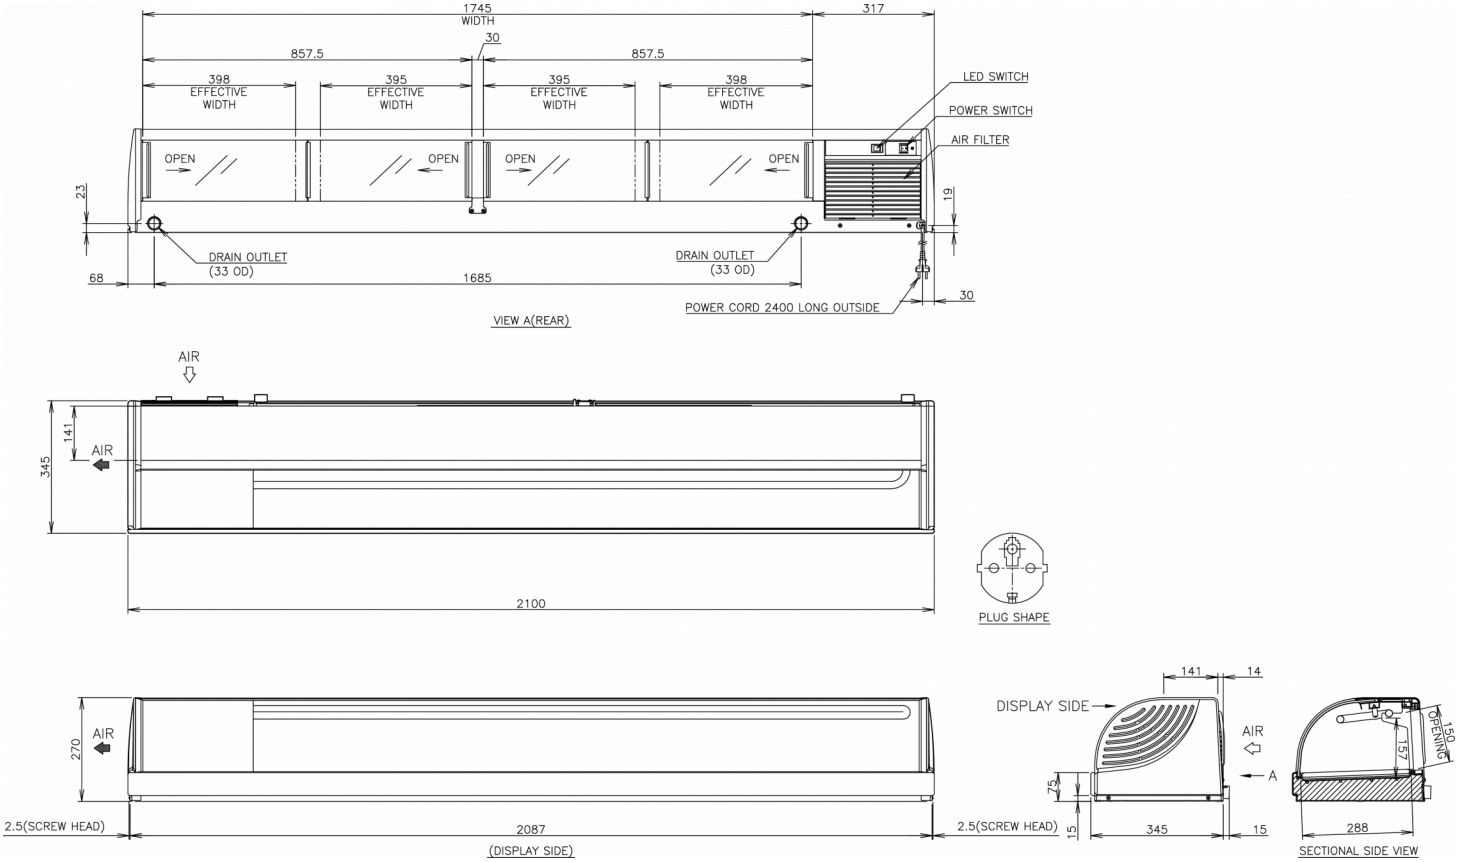

TECHNICAL SPECIFICATIONS

Cooling system	Temperature retention (6h)	Power supply	Connection load	Electric Consumption	Heat Rejection (AT 32°C, WT 21°C)
Built-in cooling system	5 °C	1/220 - 240V/50Hz	155 W	0,155 kW	0,43 kW

Volume, net	Dimensions internal (W x D x H)	Compressor	LED
87 l	845 mm x 288 mm x 157 mm	Left side	Including LED

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
2.180 mm	415 mm	517 mm	0,468 m3	68 kg	2.100 mm	345 mm	270 mm	47 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Allow 10mm extra space at the installation site to meet anyinstallation requirements (additional spacing is also required for proper airflow and pipe connections).

HOSHIZAKI

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com