



HOSHIZAKI

DCM-120KE-HC

Dispenser, Ice & Water

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 125

Storage bin capacity: 4 kg



ICE TYPE: Cubelet + Water

ACCESSORIES INCLUDED

Brush, Installation kit

OPTIONAL EXTRAS

N/A

CORRESPONDING WATER FILTERS

4HC-H Single Water Filter, 4HC Replacement Cartridge

PRODUCT SERIES: DCM

ITEM NUMBER: L032

The DCM-120KE is an ice/water dispenser that can produce the following combinations: cubelet ice, cubelet ice and water or dispense only water. The ice/water dispensing system can be used for multiple environments including hospitality, catering, leisure and healthcare. They are compact with reduced space requirements. The portion control can be easily set, making it easy to regulate the consumption of ice among end-users, therefore ideal for a self-serving environment.

- Hoshizaki ice dispensers are more compact with reduced space requirements and in line with modern interiors.
- Ice dispensing system includes lever and LED operation buttons, easy and simple to use, therefore ideal for self-serving environment.
- New lever design prevents touching the lip of a glass, minimising risk of bacterial transfer.

WARRANTY PERIOD

2 Years on Parts & Labour

EXTERIOR

Stainless steel (Side, Rear), ABS molding (Front, Top, Drain pan)

Refrigerant type: R290 / Refrigerant: 0.095 kg / CO2 equivalent: 0.285 kg

OPERATING CONDITIONS

Ambient temperature (minimum): 5 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0,05MPa (0,5bar), Water supply pressure (maximum): 0,78MPa (7,8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C


CERTIFICATIONS





HOSHIZAKI

DCM-120KE-HC

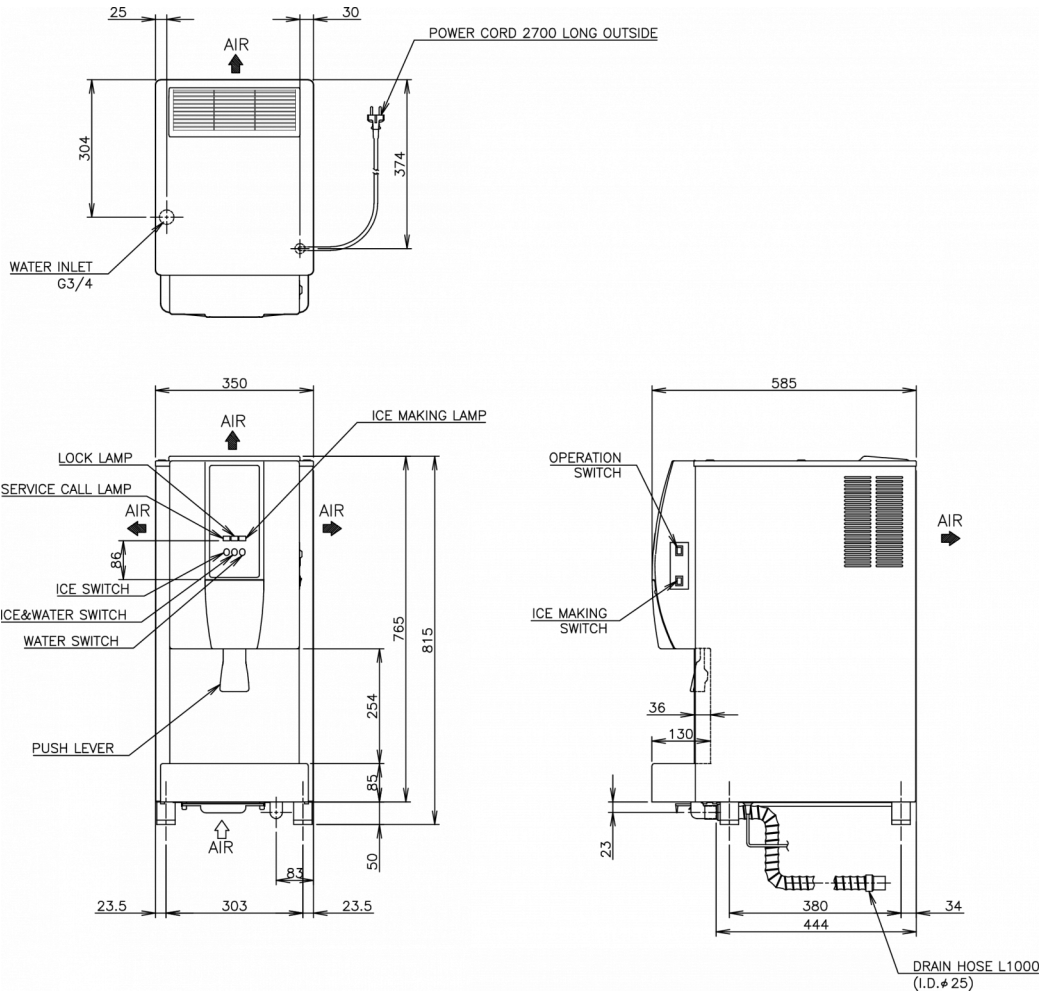

TECHNICAL SPECIFICATIONS

| Cooling system | Power supply | Electric Consumption | Electrical circuit breaker protection | Heat Rejection (AT 32°C, WT 21°C) | Production Capacity (kg/24h) - AT 10°C, WT 10°C | Production Capacity (kg/24h) - AT 21°C, WT 15°C | Production Capacity (kg/24h) - AT 32°C, WT 21°C | Water consumption (m3/24h) - AT 10°C, WT 10°C |
|----------------|-------------------|----------------------|---------------------------------------|-----------------------------------|---|---|---|---|
| Air Cooled | 1/220 - 240V/50Hz | 0.45 kW | 10 A | 0.78 kW | 125 | 105 | 85 | 0.125 |

SHIPPING SPECIFICATIONS

| Width (packed) | Depth (packed) | Height (packed) | Volume (packed) | Gross weight | Width | Depth | Height | Height including legs (minimum) | Height including legs (maximum) | Net weight |
|----------------|----------------|-----------------|-----------------|--------------|--------|--------|--------|---------------------------------|---------------------------------|------------|
| 440 mm | 655 mm | 1,026 mm | 0.296 m3 | 65 kg | 350 mm | 585 mm | 765 mm | 815 mm | 830 mm | 56 kg |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Hoshizaki Middle East

sales.ex@hoshizaki-europe.com



HOSHIZAKI

www.hoshizaki-europe.com