

IM-21CNE-HC

Cuber, Self Contained

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 25 Storage bin capacity: 11.5 kg



ICE TYPE: Large cubes, Standard





ACCESSORIES INCLUDED

Installation kit, Scoop

OPTIONAL EXTRAS

4HC-H water filtration, external drain pump, legs

CORRESPONDING WATER FILTERS

4HC-H Single Water Filter, 4HC Replacement Cartridge

PRODUCT SERIES: IM 21 ITEM NUMBER: M061 COUNTRY OF ORIGIN: UK

Hoshizaki IM-21CNE-HC is a self-contained ice maker producing up to 25 kg of cube ice per 24 hours.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may be differ due to local installation conditions

- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed Cell System helps produce compact, hard and geometrically perfect
- Closed water circuit for contamination protection
- Electronic controller
- System comes with a magnetic water pump that has no direct coupling, which prevents any leakage
- Cleanable air filter
- Removable door gasket

WARRANTY PERIOD 2 Years on Parts & Labour

EXTERIOR Stainless steel AISI 441, Galvanized steel (Rear)

Refrigerant type: R290 / Refrigerant: 0.055 kg / CO2 equivalent: 0.165

OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range: Rated Voltage ±6%

CERTIFICATIONS














IM-21CNE-HC

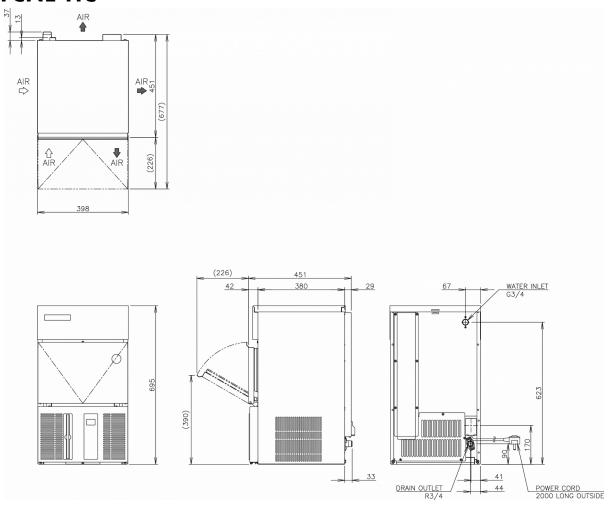

TECHNICAL SPECIFICATIONS

| TECHNICAL SI ECHICATIONS | | | | | | | | | | | |
|--------------------------|-------------|----------------------|-----------------------|---|---|--|--|--|--|--|--|
| Cooling system | Sound level | Power supply | Energy consumption | Electrical circuit breaker protection | Heat Rejection (AT 32°C, WT 21°C) | Production Capacity (kg/24h) - AT 10°C, WT 10°C | Production Capacity (kg/24h) - AT 21°C, WT 15°C | Production Capacity (kg/24h) - AT 32°C, WT 21°C | Water consumption (m3/24h) - AT 10°C, WT 10°C | | |
| Air Cooled | 51.1 dB | 1/220 - 240V/50Hz | 0.225 kWh | 5 A | 0.51 kW | 25 | 24 | 22 | 0.1 | | |

SHIPPING SPECIFICATIONS

| Width (packed |) Depth (packed) | Height (packed) | Volume (packed) | Volume, gross | Gross weight | Width | Depth | Height | Dimensions legs | Net weight |
|---------------|------------------|-----------------|--------------------|---------------|--------------|--------|--------|--------|------------------------------|------------|
| 505 mm | 575 mm | 862 mm | 0.25 m3 | 0.25 | 39 kg | 398 mm | 451 mm | 695 mm | Optional: 90-135 mm extra | 34 kg |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Legs sold separately - contact our sales office for pricing



Hoshizaki Middle East sales.ex@hoshizaki-europe.com