

IM-240NE-HC-23


Cuber, Self Contained

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 180

Storage bin capacity: 110 kg



ICE TYPE: Medium cubes - 23



ACCESSORIES INCLUDED

Installation kit, Legs, Scoop

OPTIONAL EXTRAS

4HC-H water filtration

CORRESPONDING WATER FILTERS

4HC-H Twin Water Filter, 4HC Replacement Cartridge

PRODUCT SERIES: IM 240
ITEM NUMBER: M070-D001
COUNTRY OF ORIGIN: UK

Hoshizaki IM-240NE-HC-23 is a self-contained ice maker producing up to 180 kg of cube ice per 24 hours.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may be differ due to local installation conditions.

- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed Cell System helps produce compact, hard and geometrically perfect ice
- Closed water circuit for contamination protection
- Electronic controller
- System comes with a magnetic water pump that has no direct coupling, which prevents any leakage
- Cleanable air filter
- Removable door gasket

WARRANTY PERIOD

2 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 441, Galvanized steel (Rear)

Refrigerant type: R290 / Refrigerant: 0.147 kg / CO2 equivalent: 0.441 kg


OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range: Rated Voltage $\pm 6\%$

CERTIFICATIONS



IM-240NE-HC-23

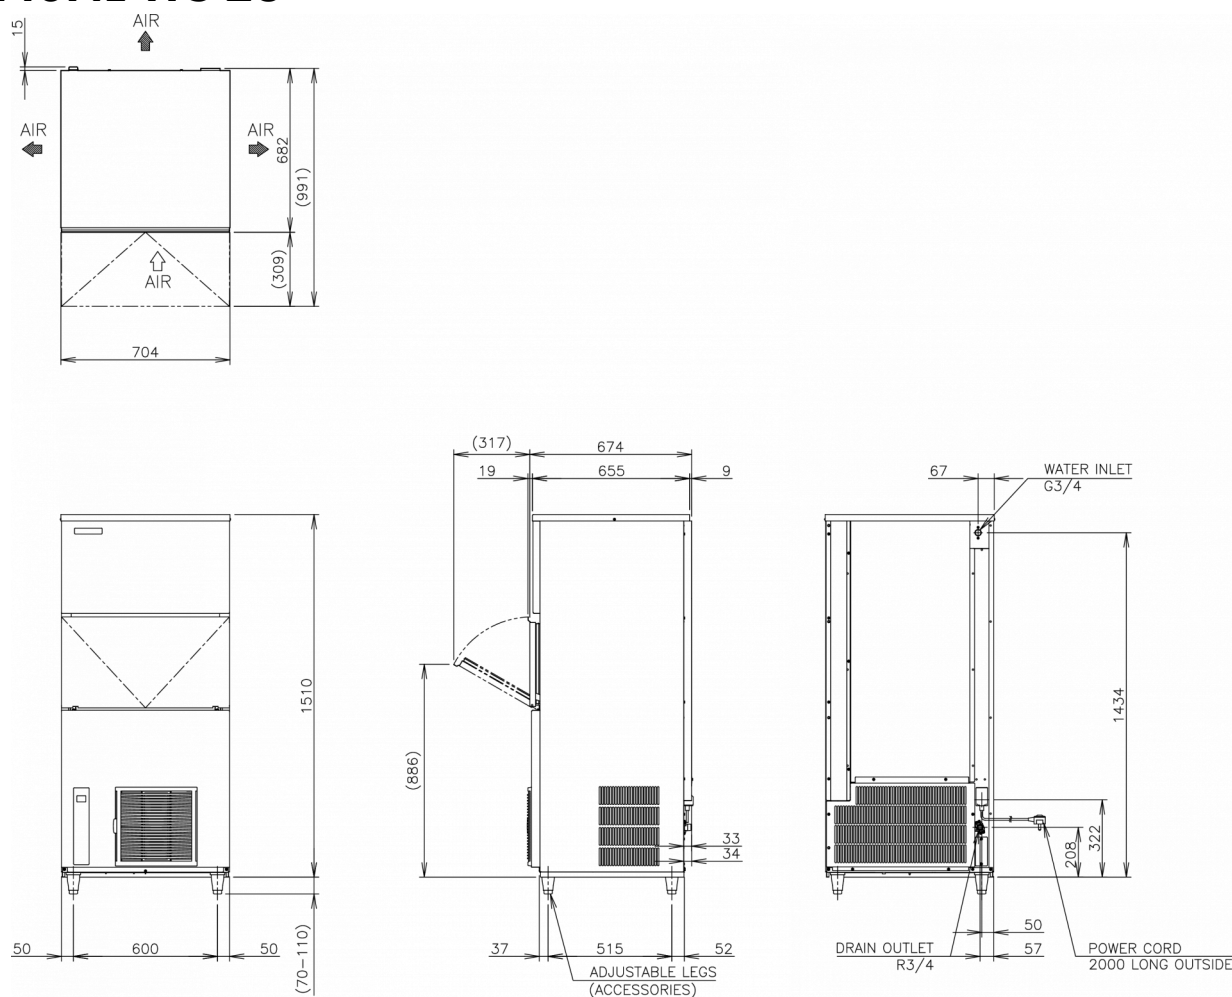

TECHNICAL SPECIFICATIONS

| Cooling system | Power supply | Energy consumption | Electrical circuit breaker protection | Heat Rejection (AT 32°C, WT 21°C) | Production Capacity (kg/24h) - AT 10°C, WT 10°C | Production Capacity (kg/24h) - AT 21°C, WT 15°C | Production Capacity (kg/24h) - AT 32°C, WT 21°C | Water consumption (m3/24h) - AT 10°C, WT 10°C |
|----------------|-------------------|--------------------|---------------------------------------|-----------------------------------|---|---|---|---|
| Air Cooled | 1/220 - 240V/50Hz | 0.93 kWh | 5 A | 2.33 kW | 180 | 175 | 145 | 0.68 |

SHIPPING SPECIFICATIONS

| Width (packed) | Depth (packed) | Height (packed) | Volume (packed) | Volume, gross | Gross weight | Width (legs excluded) | Depth (legs excluded) | Height (legs excluded) | Dimensions legs | Net weight |
|----------------|----------------|-----------------|-----------------|---------------|--------------|-----------------------|-----------------------|------------------------|-----------------------|------------|
| 805 mm | 760 mm | 1,684 mm | 1.03 m3 | 1.03 l | 120 kg | 704 mm | 665 mm | 1,510 mm | for legs add 70-110mm | 107 kg |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.