
HNC-120BE-R-BH

Sushi display case, right-sided

PRODUCT SERIES: HNC 120
ITEM NUMBER: S052-C175
COUNTRY OF ORIGIN: JAPAN







This Hoshizaki HNC-120BE-R-BH is a Sushi Case with condenser unit on the right (Right-sided). It has a net volume of 42 ltr. and a cabinet width of 1200 mm. Equipped with a sliding door with 150 mm height towards the operator, thermometer and lightweight ABS trays.

- Self contained unit.
- Refrigerated glass display
- Top glass angles down, allowing for plate space on top of units
- Antiscattering film on glass
- Smooth airflow, without forced air-circulation
- Condenser airflow is in the back and out the side
- Large condenser face improves cooling performance
- The tubular-shaped evaporator absorbs the heat continuously (no dripping).
- Solid food trays with radius groove to fit sushi foods
- The elevated side wings of the trays allow more air circulation.
- Thermometer inside the cabinet.
- The sliding door and the ABS trays are easily disassembled and removed for daily cleaning
- Not intended to be used as a cooling storage cabinet

WARRANTY PERIOD
2 Years on Parts & Labour

EXTERIOR
Clear Glass, ABS Plastic, PVC Plastic

INTERIOR
Clear Glass, ABS Plastic, Stainless Steel

Refrigerant type: R600a / Refrigerant: 0.032 kg / CO2 equivalent: 0.096 kg / GWP: 3 GWP

OPERATING CONDITIONS

Ambient temperature (minimum): 10 °C, Ambient temperature (maximum): 30 °C

ACCESSORIES INCLUDED

ABS tray (large) x 2, ABS tray (small) x 1

OPTIONAL EXTRAS


N/A


CERTIFICATIONS


Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands


T. +31 (0)20 691 8499
sales.ex@hoshizaki-europe.com
www.hoshizaki-europe.com


HNC-120BE-R-BH

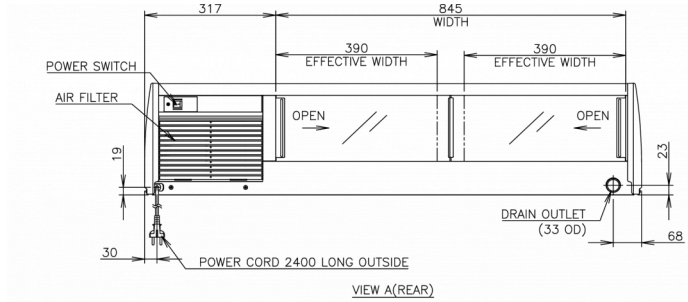


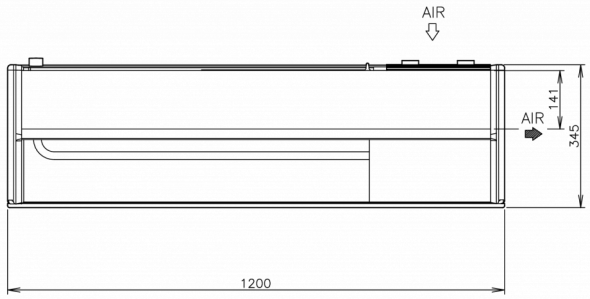



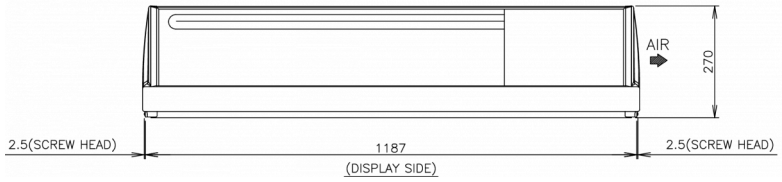





TECHNICAL SPECIFICATIONS

Cooling system	Temperature retention (6h)	Power supply	Connection load	Electric Consumption	Heat Rejection (AT 32°C, WT 21°C)
Built-in cooling system	5 °C	1/220 - 240V/50Hz	140 W	0.14 kW	0.41 kW

Volume, net	Dimensions internal (W x D x H)	Compressor	LED
42 l	845 mm x 288 mm x 157 mm	Right side	Not including LED

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1,280 mm	415 mm	517 mm	0.275 m3	44 kg	1,200 mm	345 mm	270 mm	32 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper airflow and pipe connections).