



HOSHIZAKI

RTWH70MS4

1 door undercounter refrigerator



PRODUCT SERIES: SNOWFLAKE COMFORT

ITEM NUMBER: WH86120011

COUNTRY OF ORIGIN: INDIA

Hoshizaki Snowflake RTWH70MS4 is an undercounter refrigerator with a gross volume of 171 ltr. This heavy duty cabinet is equipped with right hand hinged reversible door with lock, automatic door closing past 45° open door angle and 2 white shelves. The cabinet height is 824 mm including castors, shelf width is 561 mm.

- Fan assisted cooling
- Automatic defrost with re-evaporation of defrost water
- Electronic controller protected against splashing water
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 430
- Choice of left/right hand hinged door
- Reversing the door from right to left hand hinged at site requires a complete new door set (door and hinges)
- Self-closing door past 45° open door angle
- Conceal handle integrated into the door
- Replacable door gasket
- Door lock (optional)
- Glass door model available
- White shelves
- Shelf dimensions bottom shelf W x D: (561 x 297 mm)
- Shelf dimensions top shelf W x D: (561 x 554 mm)
- Castors height 124 mm is standard (legs are optional)
- Pan-shaped inside base with rounded corners to catch fluids
- IP X0 rating (no protection from water)

ACCESSORIES INCLUDED

2 white shelves

OPTIONAL EXTRAS

Set of legs 150-170 mm

Set of legs 90-100 mm

Stainless bottom shelf, 561 x 297 mm

Stainless top shelf, 561 x 554 mm

White bottom shelf, 561 x 297 mm

White top shelf, 561 x 554 mm

WARRANTY PERIOD

2 Years on Parts

EXTERIOR

Stainless Steel

INTERIOR

Stainless steel AISI 430

Refrigerant type: R134a / Refrigerant: 0.057 kg / CO2 equivalent: 0.171 kg

Energy consumption

2.09 kWh

CERTIFICATIONS





HOSHIZAKI

RTWH70MS4


TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Volume, net	Power supply	Connection load	Climate class	Ref. capacity - at -10°C
-2/+12°C	Top shelf 561 x 554 mm / Bottom shelf 561 x 297 mm	171 l	148 l	230V, 1N-/50 Hz	0.22 kW	5 (max. ambient 40°C w/ 40% RH)	262 kW

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
700 mm	755 mm	824 mm	0.56 l	80 kg	700 mm	755 mm	824 mm	64 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

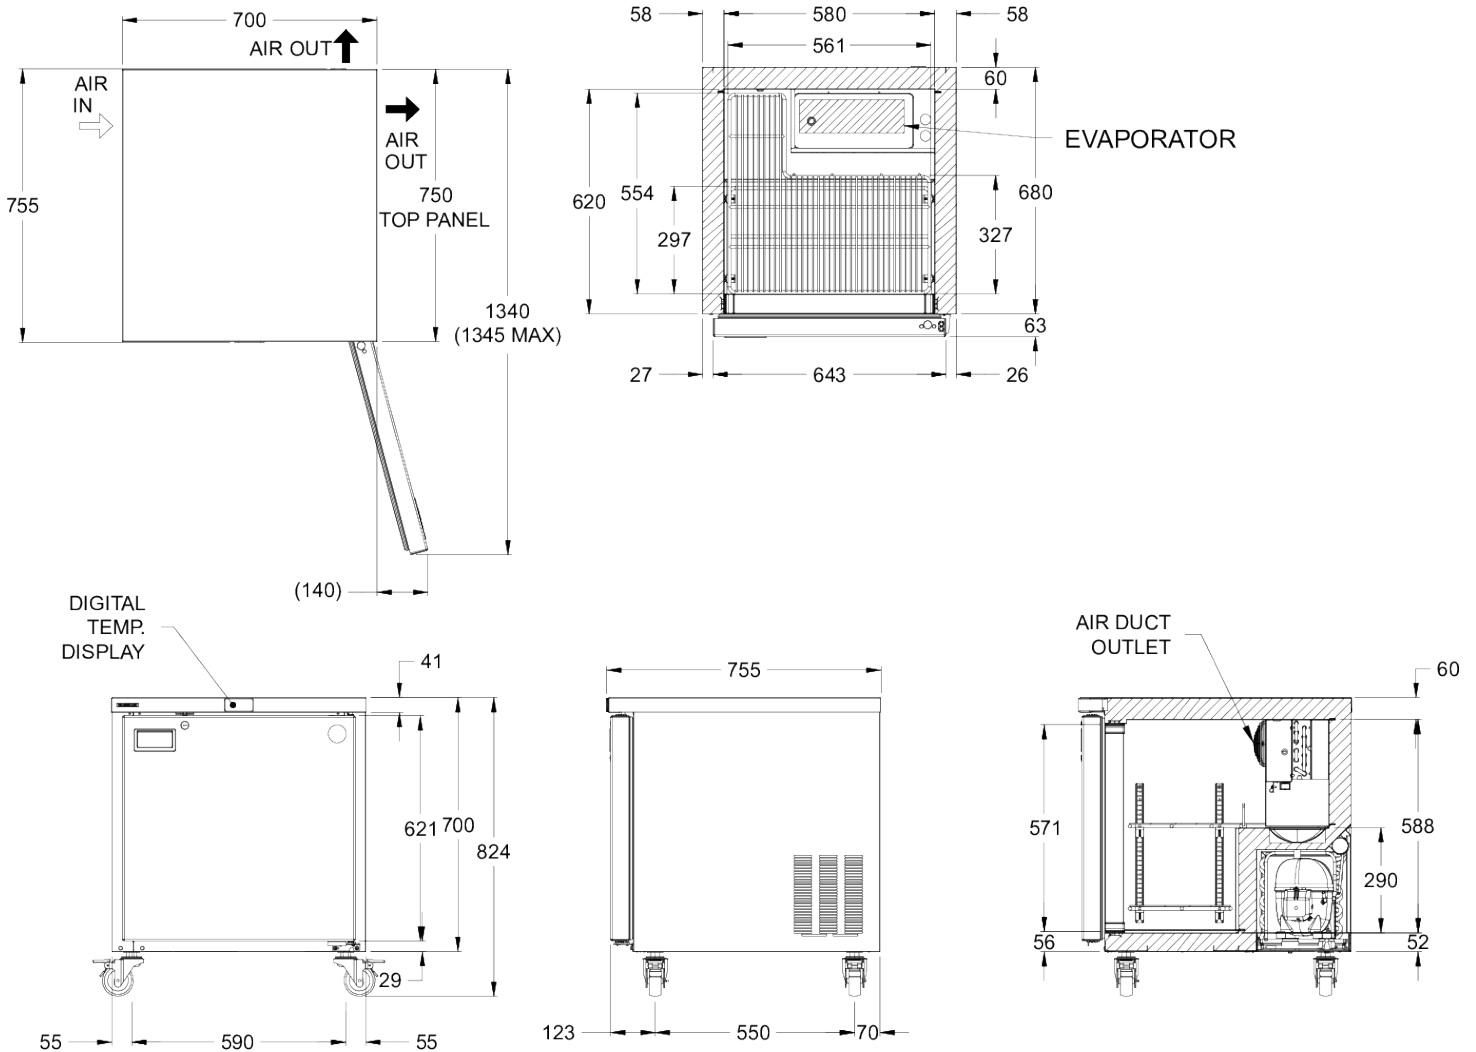

Hoshizaki Middle East

sales.ex@hoshizaki-europe.com



HOSHIZAKI

www.hoshizaki-europe.com