



HOSHIZAKI

Advance F 70-4 C DR U Freezer

PRODUCT SERIES: ADVANCE 70
ITEM NUMBER: 133702030
COUNTRY OF ORIGIN: TURKEY



Hoshizaki Advance F 70 C DR U is a 2/1 GN deep freezer with a net usable volume of 420 ltr. ranking in energy efficiency class D. It has a cabinet height of 1975mm and depth of 830mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Clean free condenser (condenser filter not needed)
- Exterior and interior of stainless steel AISI 430
- Anti-tilt shelf-supports moulded into the inner lining
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2 / 1 GN

ACCESSORIES INCLUDED

3 grey shelves (530 x 650mm) + 1 bottom shelf

OPTIONAL EXTRAS

- Set of legs 130-180 mm
- Set of castors 125 mm (2 x broken and 2 x unbroken)
- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of stainless shelves (3 top and 1 bottom) with back guard
- Master key
- Pedal door opener

WARRANTY PERIOD

5 Years on Parts & Labour

EXTERIOR

Stainless Steel

INTERIOR

Stainless steel

Refrigerant type: R290 / Refrigerant: 0.082 kg / CO2 equivalent: 0.246 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
2,171 kWh/year	D	ISO 22041: 2019	61.3 EEI



HOSHIZAKI

Advance F 70-4 C DR U




TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -25°C)
-25/-12°C	2/1 GN deep	600 l	420 l	230V, 50Hz	650 W	5 (max. ambient 40°C w/ 40% RH)	54 dB(A)	506 W


SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
745 mm	920 mm	2,090 mm	1.43 m ³	121 kg	654 mm	830 mm	1,975 mm	112 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

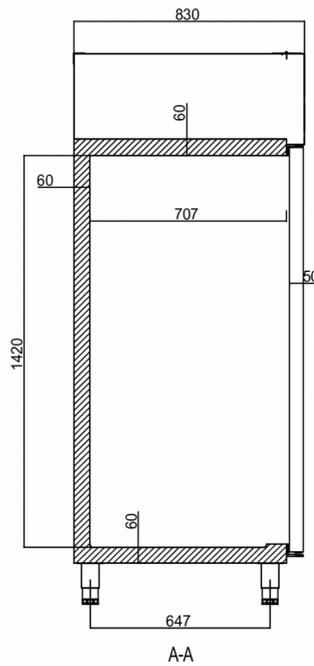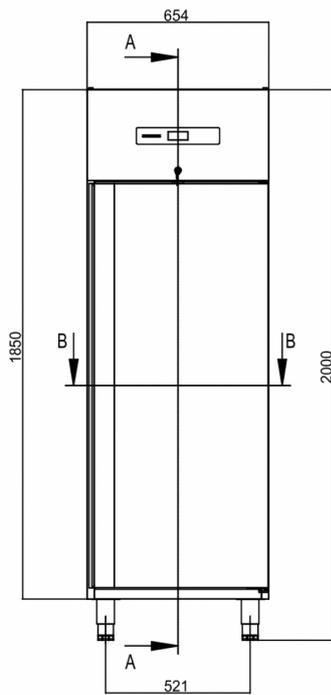

B-B



Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk