HOSHIZAKI

Baker M 550 L DR U

Refrigerator

PRODUCT SERIES: BAKER 550
ITEM NUMBER: 142551030
COUNTRY OF ORIGIN: TURKEY

Hoshizaki BAKER M 550 L DR U is a storage refrigerator for tray slides 400 x 600mm. It has a net usable volume of 335 ltr and a cabinet height of 2080-2130 mm. Legs are adjustable 130-180 mm.

- Air circulation system
- Automatic fan cut out switch
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Dry cooling function
- Exterior and interior of stainless steel AISI 304
- Reversible and self closing door with lock
- Removable magnetic door gaskets with triple insulation area
- LED lighting
- 25 sets of bakery tray supports
- Pan-shaped inside base with rounded corners to catch fluids
- Pedal door opener with overload protection
- IP21 water protection

ACCESSORIES INCLUDED

25 sets of bakery tray supports

OPTIONAL EXTRAS

Set of legs 130-180 mm
Set of castors Ø100 mm
Grey shelf with back upstand
Stainless shelf with back upstand
Set (4 of) of stainless shelves with back upstand
Set of wall rails (4 of) and tray supports (4 of) to allow for up to 27 bakery trays
Shelf supports (2 of)
Master key

WARRANTY PERIOD	EXTERIOR
6 Years on Parts & Labour	**Stainless steel AISI 304**

INTERIOR
Stainless steel AISI 304

Refrigerant type: R600a / GWP: 3 GWP / Refrigerant: 0.08 kg / CO2 equivalent: 0.24 kg

Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
396 kWh/year	B	ISO 22041: 2019	34.18 EEI

CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001
ISO HOSHIZAKI • ISO 14001
CE

Sunday, 25 October 2026, 02:49

Hoshizaki UK
2 The Technology Centre
London Road
Swanley, Kent BR8 7AG
United Kingdom

T. 01322 616 900
uksales@hoshizaki.uk
www.hoshizaki.uk

Baker M 550 L DR U

TECHNICAL SPECIFICATIONS

Bakery tray size (mm)	Bakery tray insertion	Temperature range	Volume, gross	Net usable volume	Power supply	Connection load	Climate class	Sound level	Ref. capacity (at -10°C)
400 x 600	Longitudinal insertion	-5/+12°C	480 l	335 l	230V, 50Hz	120 W	5 (max. ambient 40°C w/ 40% RH)	46 dB(A)	206 W

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
700 mm	940 mm	2,190 mm	1.44 m3	140 kg	610 mm	846 mm	2,080 mm	2,080 mm	2,130 mm	124 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

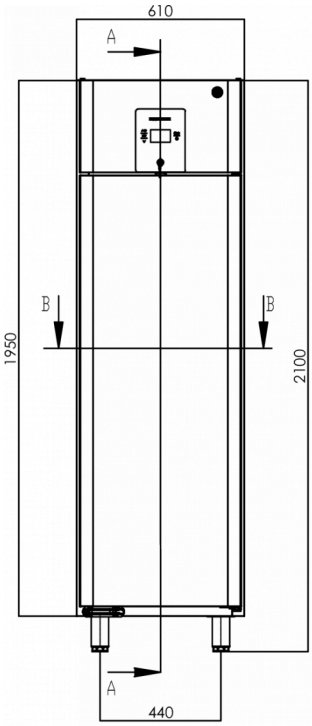

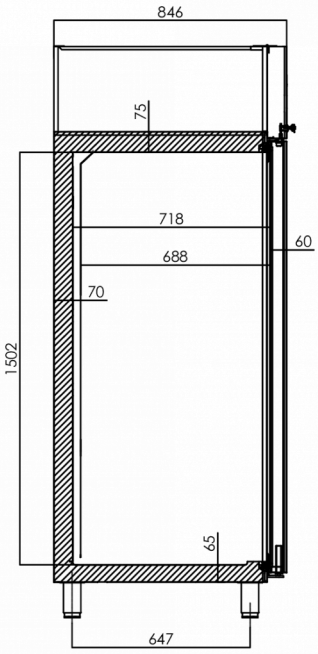

SECTION A-A



SECTION B-B

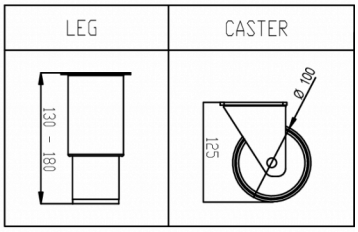

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk