



# HOSHIZAKI

## Premier U 80 DR Ru1

### Refrigerator/Freezer 'U' type with RU1 valve for remote cooling system



2/1 GN

#### ACCESSORIES INCLUDED

Pedal door opener with overload protection

#### OPTIONAL EXTRAS

Set of legs 130-180 mm  
Grey shelf with back guard  
Grey bottom shelf with back guard  
Stainless shelf with back guard  
Stainless bottom shelf with back guard  
Set of 4 stainless shelves (3 top and 1 bottom) with back guard  
Master key

PRODUCT SERIES: PREMIER W80  
ITEM NUMBER: 188801011

Hoshizaki Premier U 80 DR Ru1 is a 2/1 GN wide cabinet with RU1 valve for connection to a remote cooling system. It is ready to install and is compatible with multiple refrigerants. This heavy duty cabinet has a gross volume of 700 ltr. and the height of the cabinet with adjustable legs is 2080-2130mm. Adjustable legs are 130-180 mm. The depth is 728 mm without pedal door opener (800 mm incl. pedal door opener).

Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:

K: +2/+12°C M: -5/+12°C F: -25/-5°C

- Ready-to-install cabinet with RU1 valve
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic electric defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Tested to Climate Class 5
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf supports moulded into the inner lining
- LED lighting on the top panel
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

#### WARRANTY PERIOD

6 Years on Parts & Labour

#### EXTERIOR

Stainless steel AISI 304

#### INTERIOR

Stainless steel AISI 304

Refrigerant compatibility: R448A, R449A, R452A

#### CERTIFICATIONS





# HOSHIZAKI

## Premier U 80 DR RuI


### TECHNICAL SPECIFICATIONS

Min. cooling capacity	Shelf size	Volume, gross	Power supply	Temperature Range Span	Climate class
300 W	2/1 GN wide	700 l	230V, 50Hz	-25/+12°C	5 (max. ambient 40°C w/ 40% RH)

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height including legs (minimum)	Height including legs (maximum)	Net weight
870 mm	885 mm	2,250 mm	1.732 m <sup>3</sup>	115 kg	810 mm	728 mm	2,080 mm	2,130 mm	105 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

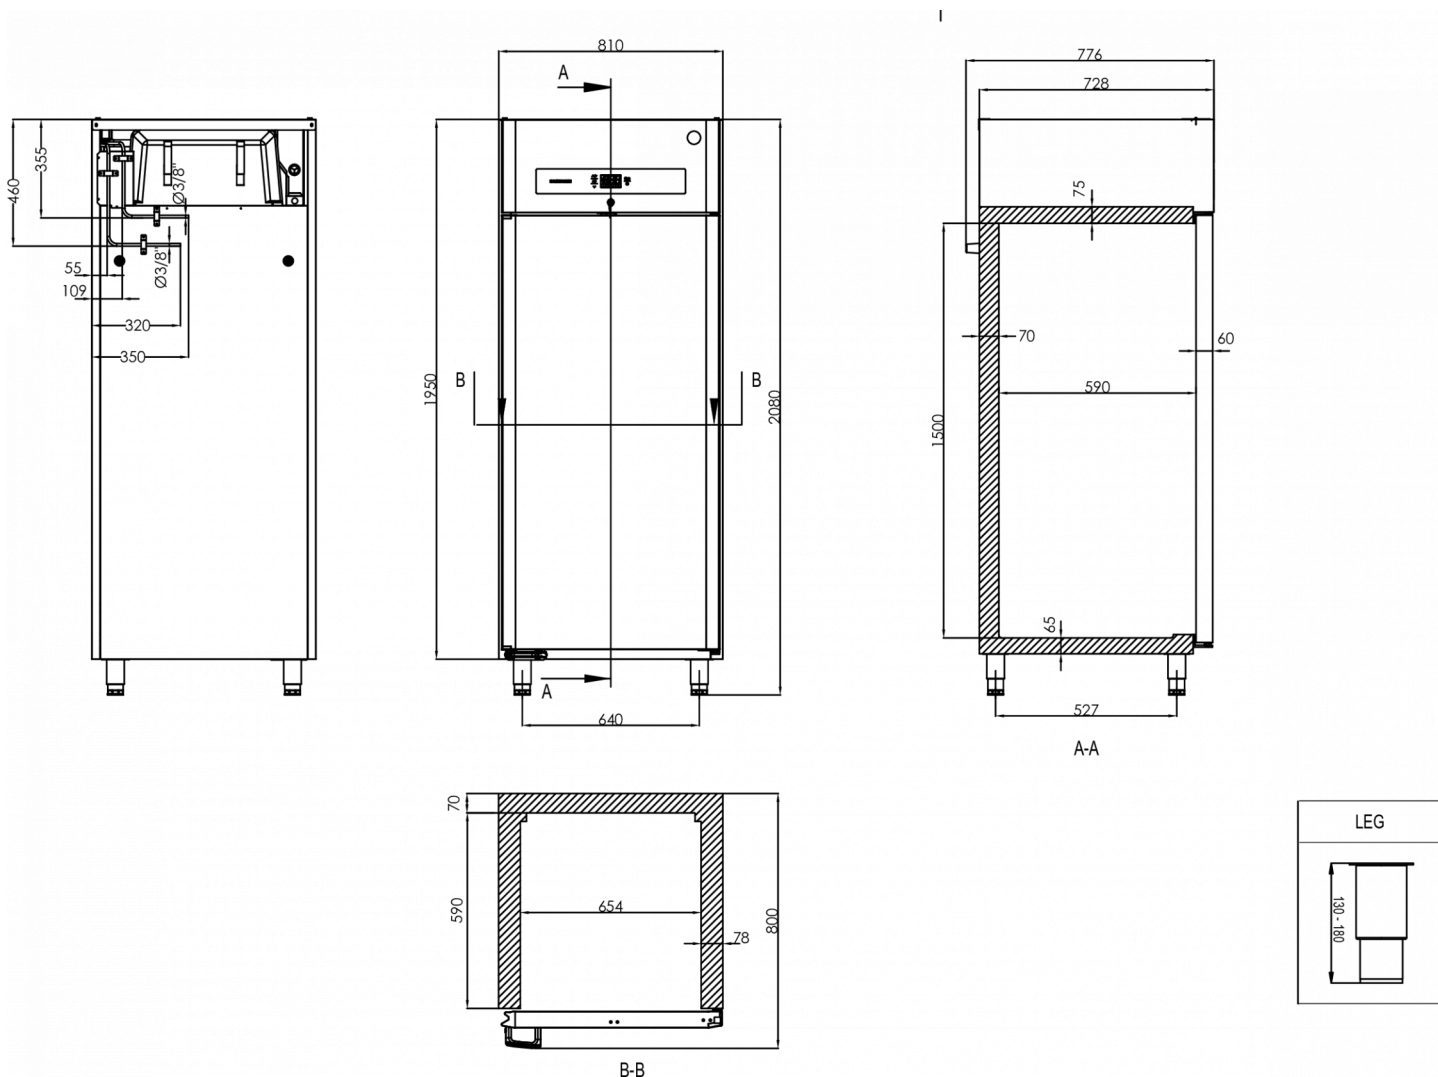

Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands  
Hoshizaki Norge  
Hoshizaki Sverige  
Hoshizaki UK  
Export countries  
Other countries

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
[orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
[uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki.uk](http://www.hoshizaki.uk)