



HOSHIZAKI

Premier K 3 A5 DL DL DR C U

3-Section Refrigerated Counter



PRODUCT SERIES: PREMIER, PREMIER 370
ITEM NUMBER: 311010112210
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier K 3 A5 DL DL DR C U is a 3-section 1/1 GN refrigerated counter with 3 doors and a worktop with 50mm splash-back. It has a net usable volume of 288 ltr. Castors H = 150mm and shelf width is 325mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- Reversible doors
- Removable magnetic door gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 2X water protection
- Matching design identity as the Premier cabinets



1 / 1 GN

ACCESSORIES INCLUDED

2 grey shelves per door section

OPTIONAL EXTRAS

Set of legs 125-200mm
Set of legs 130-180mm
Set of castors 125mm
Set of castors 150mm
Set of castors 200mm
Mini Castors - 2 braked and 2 unbraked 88mm
Stainless shelf, 325 x 530mm
Grey shelf, 325 x 530mm
Shelf supports, 2 of
Door section
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers
Flat worktop
Flat worktop with 50mm splashback
Flat worktop with 100mm splashback

WARRANTY PERIOD

6 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.065 kg / CO2 equivalent: 0.195 kg

CERTIFICATIONS



Energy consumption	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
474 kWh	A	ISO 22041-2019	18.77 EEI



HOSHIZAKI

Premier K 3 A5 DL DL DR C U


TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Volume, net	Power supply	Connection load	Climate class	Sound level	Ref. capacity - at -10°C
+2/+12°C	1/1 GN	463 l	288 l	288 l	230V, 50Hz	125 kW	5 (max. ambient 40°C w/ 40% RH)	63 dB	350 kW



SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1,783 mm	730 mm	1,153 mm	1.13 l	146 kg	1,755 mm	700 mm	954.2 mm	133 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

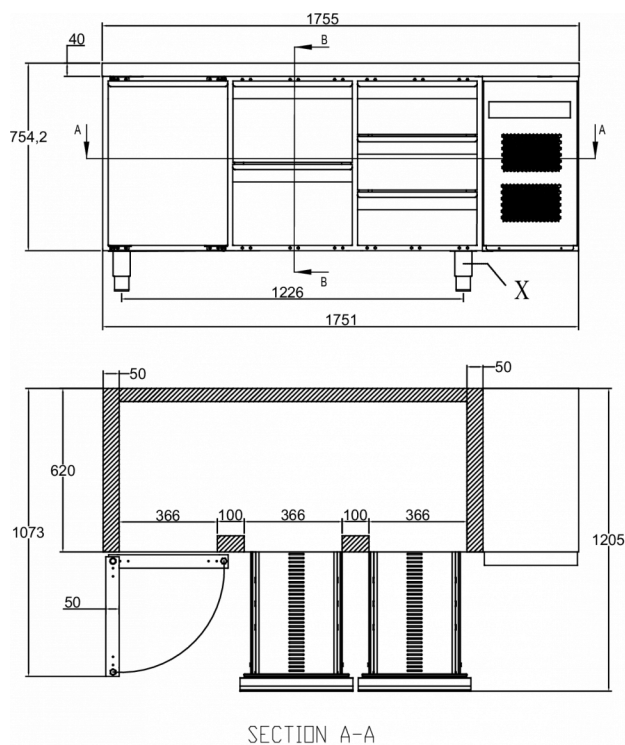

DATP

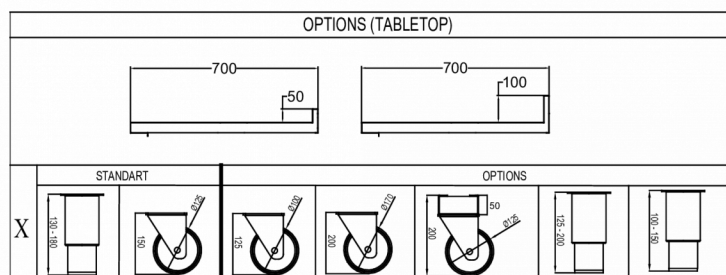

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk