



HOSHIZAKI

Premier M 3 A DL DL DR C U

3-Section Refrigerated Counter with Extended Refrigeration



PRODUCT SERIES: PREMIER, PREMIER 370
ITEM NUMBER: 312000112210
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier M 3 A DL DL DR C U is a 3-section 1/1 GN refrigerated counter with extended refrigeration and with 3 doors and a flat worktop. It has a net usable volume of 288 ltr. The body height is 750 mm, shelf width is 325 mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- Reversible doors
- Anti-tilt shelves
- Removable magnetic door gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IPX2 water protection
- Matching design identity as the Premier cabinets



1 / 1 GN

ACCESSORIES INCLUDED

3 grey shelves per section

OPTIONAL EXTRAS

Set of legs 125-200 mm
Set of legs 130-180 mm
Set of castors Ø100 mm
Set of castors Ø125 mm
Set of castors Ø170 mm
Castor Extension Kit (extends height of castors by 50 mm)
Stainless shelf, 325 x 530mm
Grey shelf, 325 x 530mm
Shelf supports, 2 of
Worktop with 100 mm splash-back

WARRANTY PERIOD

6 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.065 kg / CO2 equivalent: 0.195 kg

CERTIFICATIONS



Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index (EEI)
A	ISO 22041-2019	18.77 EEI



HOSHIZAKI

Premier M 3 A DL DL DR C U




TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Net usable volume	Volume, net	Power supply	Climate class	Sound level	Ref. capacity - at -10°C
-5/+12°C	1/1 GN	463 l	288 l	288 l	230V, 50Hz	5 (max. ambient 40°C w/ 40% RH)	43 dB	350 W

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Gross weight	Width	Depth	Height	Net weight
1,783 mm	730 mm	1,103 mm	144 kg	1,753 mm	700 mm	903 mm	131 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

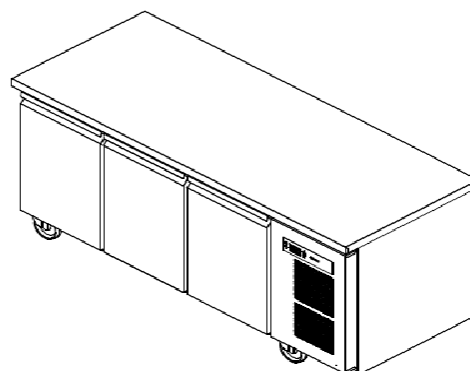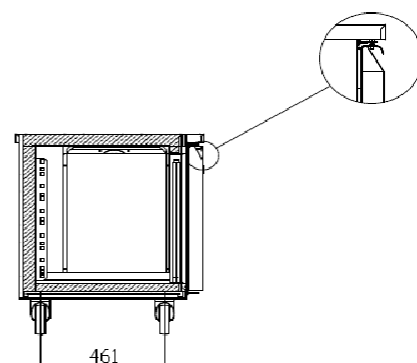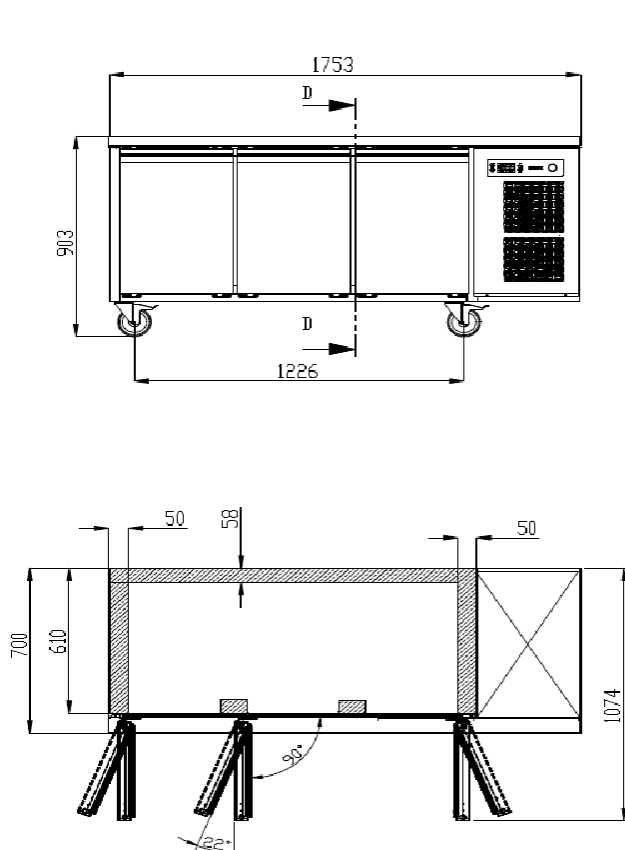

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk