




HOSHIZAKI

PREMIER BCF RI M 150 CO2 1N DL

Roll-in Blast Chiller/Freezer. Made in Panels. For CO2 cooling system

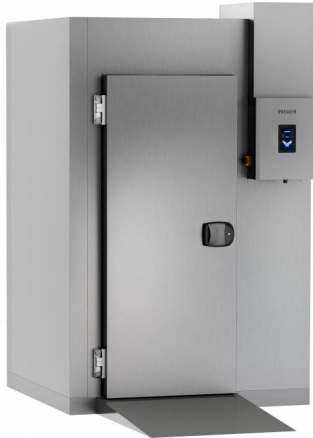

COMPATIBLE WITH

Trolleys 2 x GN1/1, 1 x GN2/1 or 2 x EN60/40, 1 x EN60/80

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

Bumpers *
Ozone generator *
Pre-painted exterior cabinet *
Remote controller *
Right-hand hinged door (Add-on) *
Pass through with two doors *
Cabinet without floor *
Cabinet with nonslip floor *
Wooden crate packaging (Add-on) *

* Add-on = Must be specified when placing the order

PRODUCT SERIES: ROLL-IN MADE-IN PANEL BLAST CHILLER/FREEZER
ITEM NUMBER: 5BMA8DCRH-F1A3MC
COUNTRY OF ORIGIN: ITALY

PREMIER BCF RI M 150 CO2 1N DL is a HACCP compliant blast chiller/freezer applicable for trolley GN1/1, EN60/40 or GN2/1, EN60/80. Chilling/freezing capacity of 150/100kg.

The cabinet comes with floor, ramp, controller, wi-fi connection, Ethernet port, core probe, external condensate drain tube, USB-port and lock closure.

- Supplied unassembled on pallets
- 7" touch screen controller with coloured icons
- Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitisation, bottle cooling, pastry, cell sanitisation, thawing, cell drying
- Choice of time- or temperature-controlled (probe) chill/freeze cycles
- Single probe cascade cycles, Timer cycles, Quick start
- Heated core probe
- Can be connected to wi-fi
- Ethernet port
- USB-port for HACCP data collection
- Customisable parameters
- Multiple and customisable cycle stages
- Adjustable fan speed
- Operating in ambient temperatures up to +40°C
- Hot gas defrosting
- Front access to electrical box
- Internal fan section can be opened for easy cleaning around and behind
- Left-hand hinged door (right-hand hinged door is optional)
- Heated door perimeter
- Trolley ramp
- Evaporator with cataphoresis coating for rust protection
- Rounded internal corners
- Lock closure
- Main power switch
- Extra drip collection tray
- Smart connectors for seamless installation and interconnection with other products in the range

WARRANTY PERIOD

1 Year on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: 3 x 0.15kg / Refrigerant compatibility: R744



HOSHIZAKI

PREMIER BCF RI M 150 CO2 1N DL

TECHNICAL SPECIFICATIONS

Cooling system	Temperature range	Power supply	Required cooling capacity	Connection load	Fuse Rating	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
For remote cooling system	-40/+40°C	380-420V/1N/50Hz	18,500 W	616 W	16 A	150 kg	100 kg

Climate class	Net weight	Door clear opening (W x H)	Dimensions internal (W x D x H)	Dimensions external (W x D x H)
5 (max. ambient 40°C w/ 40% RH)	500 kg	800 x 1850 mm	800 mm x 1,200 mm x 1,850 mm	1,500 mm x 1,550 mm x 2,395 mm

SHIPPING SPECIFICATIONS

Dimensions packed (W x D x H)	Dimensions packed, second parcel (W x D x H)	Volume (packed)	Gross weight
1,050 mm x 2,270 mm x 560 mm	1,500 mm x 2,250 mm x 1,050 mm	4.9 m ³	550 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Supplied unassembled on pallets



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com


www.hoshizaki.uk





HOSHIZAKI

PREMIER BCF RI M 150 CO2 1N DL


FRONT VIEW

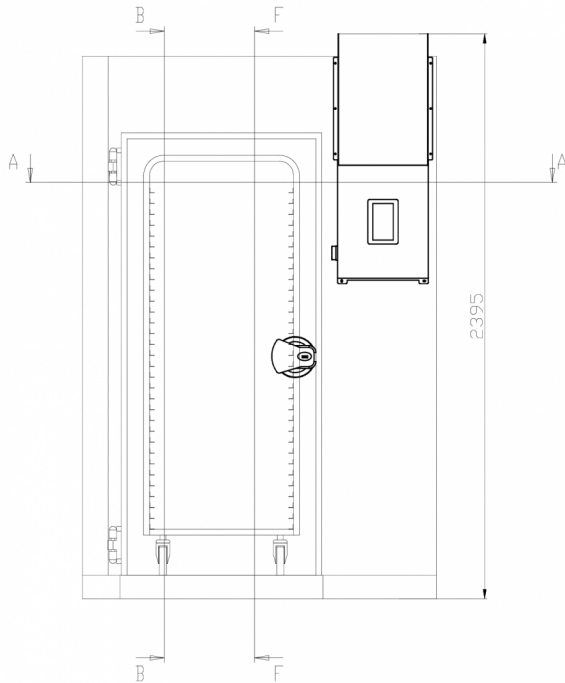

SEC B-B

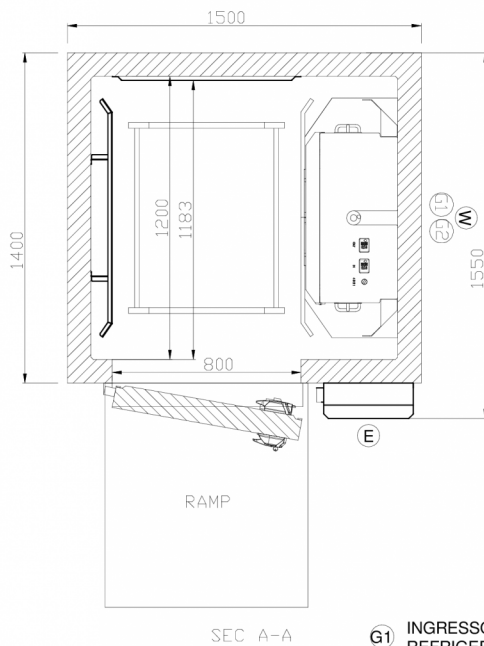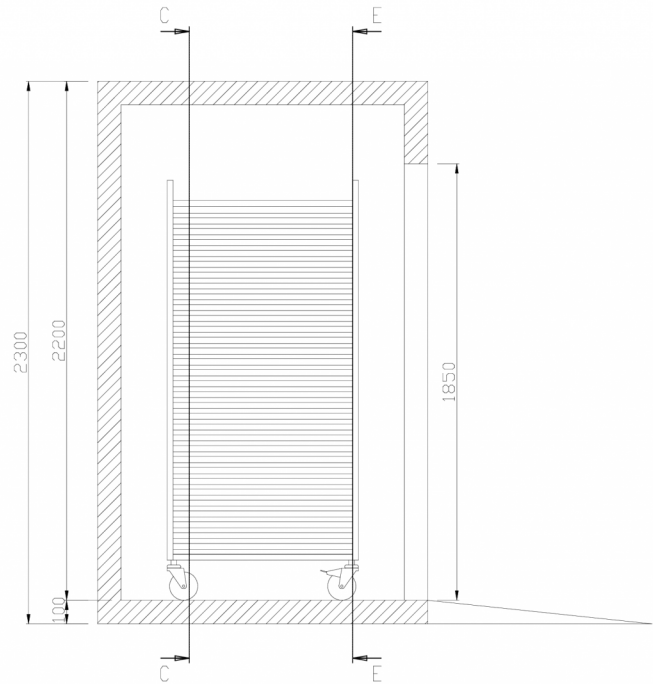

SEC C-C

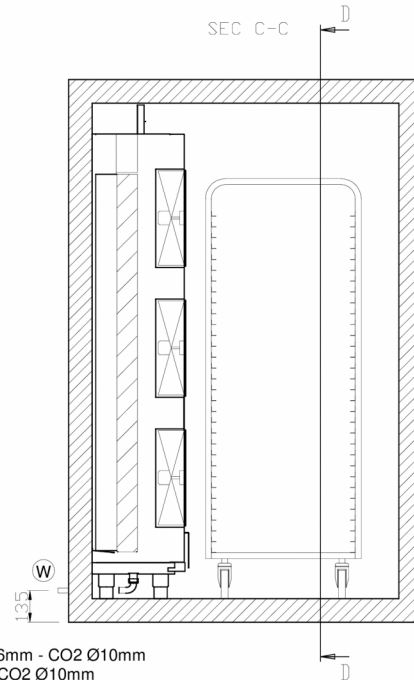

- ① INGRESSO REFRIGERANTE Ø16mm - CO2 Ø10mm
REFRIGERANT INLET Ø16mm - CO2 Ø10mm
- ② USCITA REFRIGERANTE Ø28mm - CO2 Ø16mm
REFRIGERANT OUTLET Ø28mm - CO2 Ø16mm
- Ⓜ CONNESSIONE SCARICO Ø1"
DRAIN CONNECTION Ø1"
- ⓔ CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
order@hoshizaki.se
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk