



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL

Roll-in Unibody Blast Chiller/Freezer.
Transport car support with legs



COMPATIBLE WITH

Trolley GN1/1 or EN60/40

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

Bumpers *

Ozone generator *

Right-hand hinged door *

Wooden crate packaging *

* Add-on = Must be specified when placing the order

PRODUCT SERIES: ROLL-IN UNIBODY BLASTCHILLER/FREEZER

ITEM NUMBER: 5CCA8DCEH-20A3IC

COUNTRY OF ORIGIN: ITALY

PREMIER BCF RIT U 100 A 3N DL BK is a HACCP compliant blast chiller/freezer supporting transport cart applicable for trolley GN1/1 or EN60/40. Chilling/freezing capacity of 100/78 kg.

The cabinet comes controller, wi-fi connection, Ethernet port, core probe, external condensate drain tube, USB-port and lock closure.

- 7" touch screen controller with coloured icons
- Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitisation, bottle cooling, pastry, cell sanitisation, thawing, cell drying
- Choice of time- or temperature-controlled (probe) chill/freeze cycles
- Single probe cascade cycles, Timer cycles, Quick start
- Heated core probe
- Can be connected to wi-fi
- Ethernet port
- USB-port for HACCP data collection
- Customisable parameters
- Multiple and customisable cycle stages
- Adjustable fan speed
- Operating in ambient temperatures up to +40°C
- Hot gas defrosting
- Front access to electrical box
- Internal fan section can be opened for easy cleaning around and behind
- Left-hand hinged door (right-hand hinged door is optional)
- Heated door perimeter
- Evaporator with cataphoresis coating for rust protection
- Rounded internal corners
- Lock closure

Compatible with oven trolleys:

- Rational: iCombi 20-11 1/1 GN, iCP-iCC 20-11 1/1 GN, SCC HGW 1/1 GN
- Refigo: VO2011R 1/1
- GNConvothrm: 20.10 1/1 GN

WARRANTY PERIOD

1 Year on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.45 kg / CO2 equivalent: 1.35 kg



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL

TECHNICAL SPECIFICATIONS

Cooling system	Temperature range	Power supply	Cooling capacity (evap. -10°C / cond. 45°C)	Connection load	Fuse Rating	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Air Cooled	-40/+40°C	380-420V/3N/50Hz	7,233 W	4,629 W	20 A	100 kg	78 kg

Climate class	Sound level	Net weight	Height including legs (minimum)	Height including legs (maximum)	Door clear opening (W x H)	Dimensions internal (W x D x H)	Dimensions external (W x D x H)
5 (max. ambient 40°C w/ 40% RH)	70.76 dB(A)	380 kg	2,280 mm	2,365 mm	690 x 1545,8 mm	690 mm x 834 mm x 1,545 mm	1,210 mm x 1,081 mm x 2,280 mm

SHIPPING SPECIFICATIONS

Dimensions packed (W x D x H)	Volume (packed)	Gross weight
1,100 mm x 1,240 mm x 2,540 mm	3.5 m3	410 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com


Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL

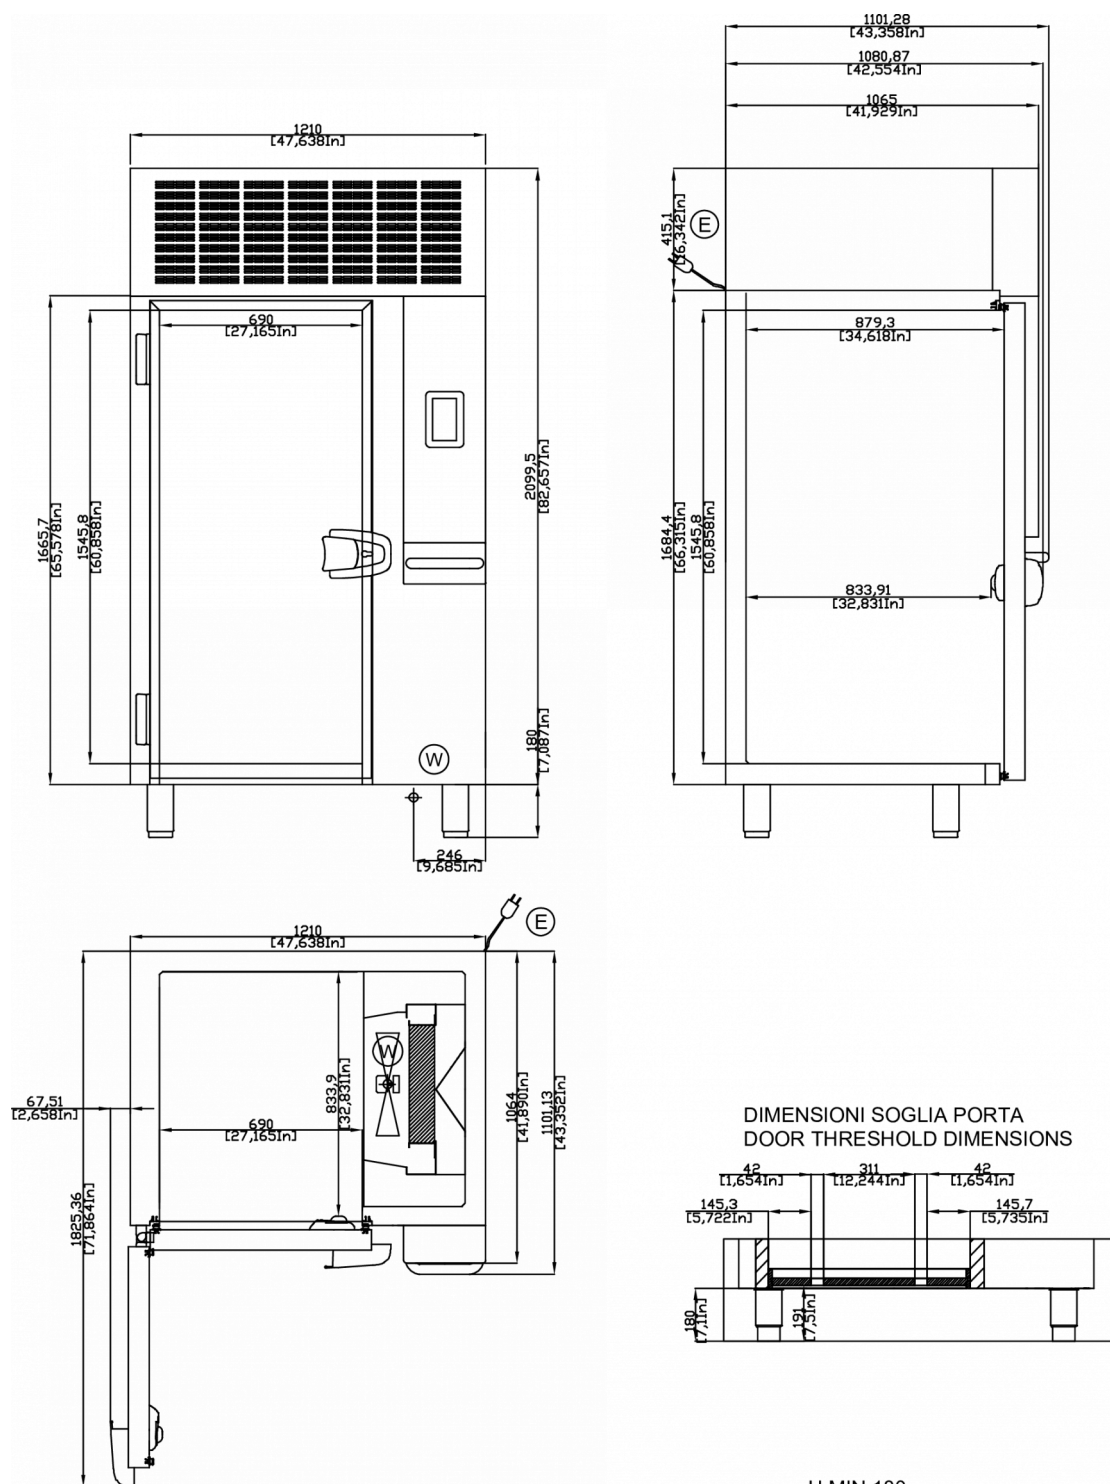

- H MIN 180
- H MAX 265
- CONNESSIONE SCARICO
DRAIN CONNECTION
- CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION