



# HOSHIZAKI

## BEERMATIC SingleTap CFD-AS61A-EU(UK)

### Beer Dispenser, Single Tap



ITEM NUMBER: 66AZ-D136  
COUNTRY OF ORIGIN: JAPAN  
BRAND: HOSHIZAKI

Hoshizaki BEERMATIC SingleTap CFD-AS61A-EU(UK) is an automatic Draft Beer Dispenser with Foaming Mechanism. This dispenser has no built-in cooling system and is for connection to remote system. Immediate dispensing performance, start serving without waiting for ice build-up. Switch on and serve instantly, fresh beer with zero waiting time.

Hands-free portion control allows set quantity of chilled draft beer and beer head to be served by the push of a button. Beer is dispensed first, followed by beer head, which is poured from a separate spout. Thus, portion control can be very accurate, without spillage of beer and/or beer head.

- Hands-free portion control.
- Manual pouring can be quickly implemented.
- A portion counter monitors the number of portions served.
- Designed for high-volume outlets.
- Manually raising or lowering the glass support base to the desired distance.
- Folding or unfolding the spring-loaded base, beer can be served from the tap into two pre-set sizes.
- Compatible with jugs of 50 mm or more in inside diameter and 105 mm or less in outside diameter.
- The mug platform can be adjusted to two heights by moving the upper and lower platforms. The glass guide also slides forward or backward to fit different glass shapes.
- Rear LED backlight display sheet. Replace the existing photo sheet or add a new sheet in front of it.

#### ACCESSORIES INCLUDED

Cleaning sponges, Platform

#### OPTIONAL EXTRAS

N/A

#### WARRANTY PERIOD

**2 Years on Parts & Labour**

#### EXTERIOR

ABS front and side panels, bottom plate of galvanized steel

#### OPERATING CONDITIONS

Ambient temperature (minimum): 5 °C, Ambient temperature (maximum): 32 °C


#### CERTIFICATIONS





# HOSHIZAKI

## BEERMATIC SingleTap CFD-AS61A-EU(UK)

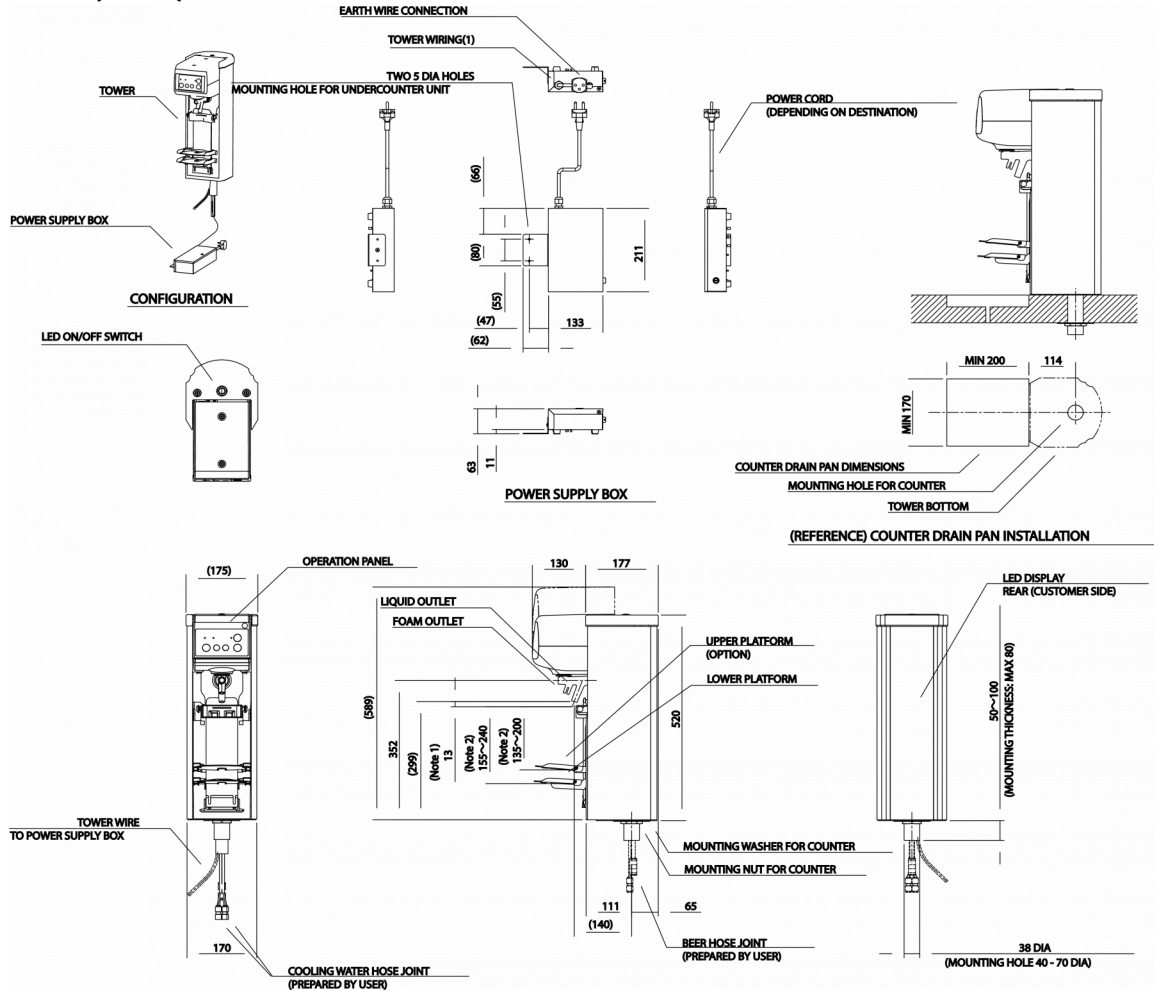

### TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electrical circuit breaker protection	Flow Rate
For remote cooling system	1/220 - 240V/50Hz	2 A	35 ml/s (~1.2 bar, 10m hose)

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
795 mm	335 mm	410 mm	0.109 m <sup>3</sup>	16 kg	170 mm	307 mm	520 mm	10.2 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: The draft beer dispenser is compatible with glasses of 50 mm or over in inside diameter and 105 mm or less in outside diameter. There must be a difference of 20 mm or over in height between a large size glass and a medium size glass. If you use glasses or tumblers of other sizes, please consult our installation manual. Available as special order unit.



Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [order@hoshizaki.se](mailto:order@hoshizaki.se)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki.uk](http://www.hoshizaki.uk)