


SNOWFLAKE G II SUF-135DG-R-C U

2-DOOR FREEZER CABINET, HC

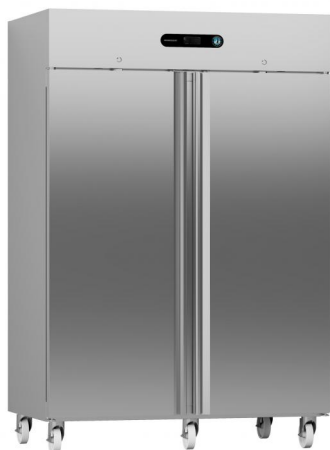

PRODUCT SERIES: SNOWFLAKE GII
ITEM NUMBER: 878010865

The Snowflake GII series is brought to you by Japanese and Danish engineering excellence, dedicated to simplify the day-to-day work routines of kitchen staffs all around the world.

The technology behind the performance boost of Snowflake GII is the tropicalised cooling system enduring up to +40°C. Additionally, the cooling agent of the new generation of Snowflake is the ecofriendly refrigerant R290, a natural gas (HC) that enhances the performance and cuts down energy consumption significantly.

Both interior and exterior are built of anti-corrosion stainless steel, which is among the best choices for hygienic and food safe cooking environments.

The Snowflake GII SUF-135DG-R-C U is a 2-door freezer cabinet with a net internal volume of 800 Ltr.

As a product that is designed and built to last, this freezer cabinet combines an innovative design concept, premium materials and clever extras:

- Minimum cool air lost: double insulated and extra wide door gaskets help to keep the cold air into the cabinet
- Anti-tilt mechanism: moulded liners for safer container and rooster handling
- Reversible doors for maximum flexibility
- Removable gaskets make sure you can clean the device thoroughly
- This and other thoughtful extras, such as the cleaning-free condenser, are designed to reduce kitchen cleaning times whilst storing foods protectively in the best possible way

The refrigerant used in all Snowflake GII HC models is R290. This agent is a natural gas which enhances the performance of the refrigerated counter and has, compared to other refrigerants, a minimal ozone depletion potential.

EXTERIOR

Stainless Steel AISI 430

INTERIOR

Stainless

Refrigerant type: R290 / CO2 equivalent: 0.426 kg

Energy efficiency class

E



HOSHIZAKI

SNOWFLAKE G II SUF-135DG-R-C U

TECHNICAL SPECIFICATIONS

Temperature range	Shelf size	Volume, gross	Power supply	Climate class
-20/-10°C	2/1 GN deep	1,310 l	230V, 50Hz	4 (max. ambient temp. of 30 °C with 55% RH)

SHIPPING SPECIFICATIONS

Gross weight	Width	Depth	Height	Net weight
240 kg	1,344 mm	840 mm	1,996 mm	240 kg



Dimensional drawing coming soon



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk