



HOSHIZAKI

ADVANCE SBU20GLU

Blast Chiller/Freezer, Built-in model without worktop



PRODUCT SERIES: ADVANCE SBU 20

ITEM NUMBER: 975780523


COUNTRY OF ORIGIN: ITALY

ADVANCE SBU20GLU is an HACCP compliant 'Built-in' blast chiller/freezer without worktop for 1/1 GN and/or EN 600 x 400mm trays (max of 5). Chilling/freezing capacity of 20/12 kg. It features a control panel with segment display for simple and fast navigation. Use the preset favourite programs or store your customized cycles. Legs are adjustable 75-108mm.

- 'Built-in' blast chiller/freezer without worktop
- Digital control panel with segment display for simple and fast navigation
- USB port for download of cooling log data
- Single-point probe for precise core temperature control
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 5
- The internal fan section can be opened for cleaning around and behind the unit
- Defrost drip tray position under the cabinet
- Right hand hinged door
- Reversible door
- Removable magnetic door gasket



1 / 1 GN



600 x 400 EN

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

N/A

WARRANTY PERIOD

3 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.08 kg / CO2 equivalent: 0.24 kg

CERTIFICATIONS



Energy consumption - Chilling (kWh/kg)	Energy Consumption - Freezing (kWh/kg)
0.08 kWh/kg	0.26 kWh/kg



HOSHIZAKI

ADVANCE SBU20GLU

TECHNICAL SPECIFICATIONS


Cooling system	GN tray size	Maximum number of trays	Temperature range	Power supply	Climate class	Sound level	Ref. capacity (at -25°C)	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Built-in cooling system	1/1 GN / 400 x 600 mm EN	5	-40/+10°C	230V, 50Hz	5 (max. ambient 40°C w/ 40% RH)	60 dB	880 W	20 kg	12 kg

Maximum depth of gastro pans, GN/EN	Height from base to first guide	Height from ceiling to top guide	Distance between guide positions, GN/EN	Dimensions internal (W x D x H)
325/400	38 mm	48 mm	530/600	620 mm x 590 mm x 375 mm

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
810 mm	770 mm	1,060 mm	0.661 m ³	95 kg	745 mm	700 mm	742 mm	817 mm	850 mm	85 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

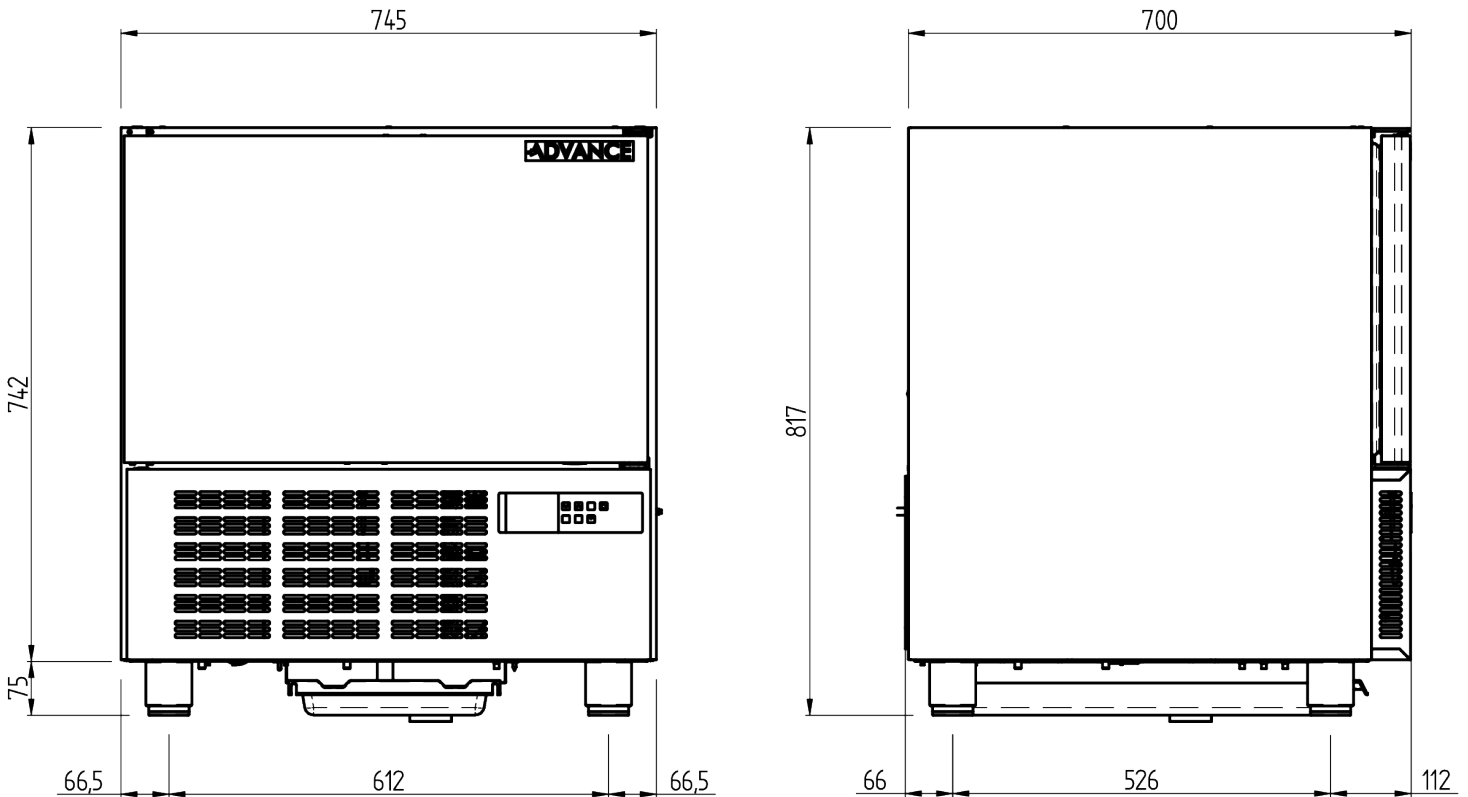

Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk