




# HOSHIZAKI

## ADVANCE SBU40GT (230 V) Blast Chiller/Freezer



1 / 1 GN



600 x 400 EN

### ACCESSORIES INCLUDED

N/A

### OPTIONAL EXTRAS

N/A

PRODUCT SERIES: ADVANCE SBU 40

ITEM NUMBER: 975780541

COUNTRY OF ORIGIN: ITALY

ADVANCE SBU40GT (230 V) is an HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 10). Chilling/freezing capacity of 45/28kg. It features a control panel with segment display for simple and fast navigation. Use the preset favourite programs or store your customized cycles. Legs are adjustable 105-155mm.

- Digital control panel with segment display for simple and fast navigation
- Single-point probe for precise core temperature control
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 10
- The internal fan section can be opened for cleaning around and behind the unit
- Defrost drip tray position under the cabinet
- Right hand hinged door
- Reversible door
- Removable magnetic door gasket

#### WARRANTY PERIOD

**3 Years on Parts & Labour**

#### EXTERIOR

**Stainless steel AISI 304**

#### INTERIOR

**Stainless steel AISI 304**

Refrigerant type: R290 / Refrigerant: 0.3 kg / CO2 equivalent: 0.9 kg

#### CERTIFICATIONS



Energy consumption - Chilling (kWh/kg)	Energy Consumption - Freezing (kWh/kg)
0.08 kWh/kg	0.28 kWh/kg



# HOSHIZAKI

## ADVANCE SBU40GT (230 V)

### TECHNICAL SPECIFICATIONS


Cooling system	GN tray size	Maximum number of trays	Temperature range	Power supply	Climate class	Sound level	Ref. capacity (at -25°C)	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Built-in cooling system	1/1 GN / 400 x 600 mm EN	10	-40/+10°C	230V, 50Hz	5 (max. ambient 40°C w/ 40% RH)	64 dB	1,900 kW	45 kg	28 kg

Maximum depth of gastro pans, GN/EN	Height from base to first guide	Height from ceiling to top guide	Distance between guide positions, GN/EN	Dimensions internal (W x D x H)
325/400	61 mm	745 mm	530/600	645 mm x 702 mm x 780 mm

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
880 mm	990 mm	2,054 mm	1.789 m <sup>3</sup>	200 kg	800 mm	930 mm	1,709.5 mm	1,814.5 mm	1,864.5 mm	175 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

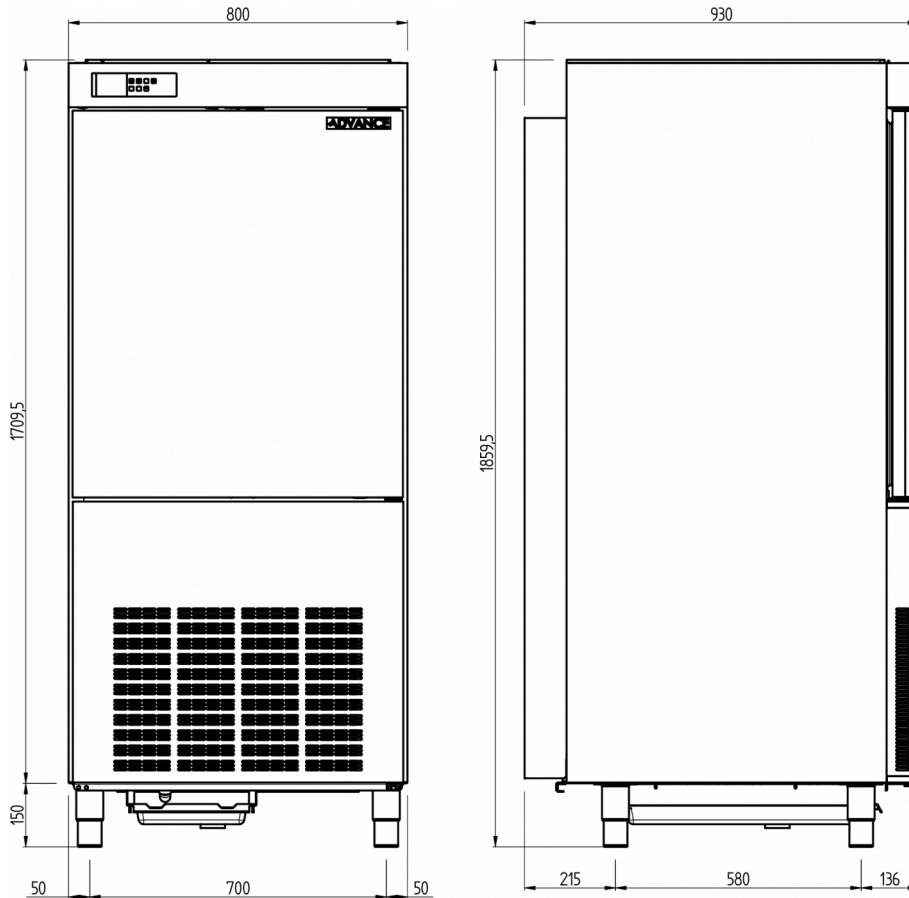

Hoshizaki Belgium  
Hoshizaki Danmark  
Hoshizaki Deutschland  
Hoshizaki France  
Hoshizaki Iberia  
Hoshizaki Italia  
Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki.uk](http://www.hoshizaki.uk)