



# HOSHIZAKI

## DCM-120KE-HC (UK)

### Dispenser, Ice & Water

**Production Capacity (kg/24h) - AT 10°C, WT 10°C: 125**  
**Storage bin capacity: 4 kg**



**ICE TYPE:** Cubelet + Water

#### OPTIONAL EXTRAS

N/A

ITEM NUMBER: L032-C101

COUNTRY OF ORIGIN: UK

Hoshizaki DCM-120KE-HC is an ice/water dispenser producing up to 125 kg of cubelet ice per 24 hours. It can produce the following combinations: cubelet ice, cubelet ice and water or dispense only water.

- Ice dispensing system includes lever and LED operation buttons
- Portion control by dispense switch
- Ideal for self-serving environment
- The lever design prevents touching the lip of a glass, minimising risk of bacterial transfer
- Ice making water control by float switch and water valve
- Also available with push button as alternative to lever design

**WARRANTY PERIOD**

**2 Years on Parts & Labour**

#### EXTERIOR

**Stainless steel (Side, Rear), ABS molding (Front, Top, Drain pan)**

Refrigerant type: R290 / Refrigerant: 0.095 kg / CO2 equivalent: 0.285 kg

#### OPERATING CONDITIONS

Ambient temperature (minimum): 5 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.05 MPa (0.5bar), Water supply pressure (maximum): 0.78 MPa (7.8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range: Rated Voltage ±6%


#### CERTIFICATIONS





# HOSHIZAKI

## DCM-120KE-HC (UK)

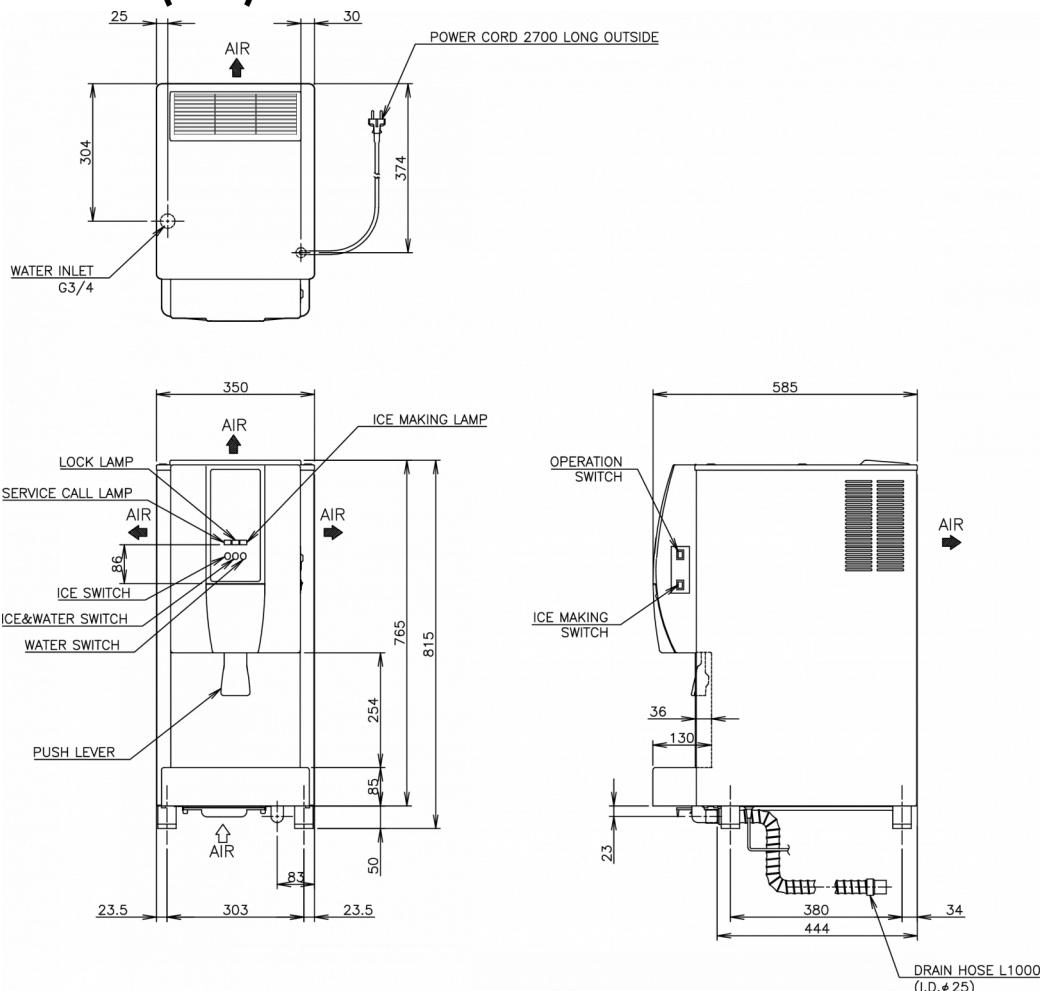

### TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0.45 kW	10 A	0.78 kW	125	105	85	0.125

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height including legs (minimum)	Height including legs (maximum)	Net weight
440 mm	655 mm	1,026 mm	0.296 m3	65 kg	350 mm	585 mm	815 mm	830 mm	56 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Please observe: Also available with push button as alternative to lever design (DCM-120KE-P-HC)



# HOSHIZAKI

Hoshizaki Belgium  
 Hoshizaki Danmark  
 Hoshizaki Deutschland  
 Hoshizaki France  
 Hoshizaki Iberia  
 Hoshizaki Italia  
 Hoshizaki Middle East

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[soles.ex@hoshizaki-europe.com](mailto:soles.ex@hoshizaki-europe.com)

Hoshizaki Netherlands  
 Hoshizaki Norge  
 Hoshizaki Sverige  
 Hoshizaki UK  
 Export countries  
 Other countries  
[www.hoshizaki.uk](http://www.hoshizaki.uk)

[info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
[salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
[orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
[uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)