


SNOWFLAKE G II SUF-135DG-C-

L

Congélateur

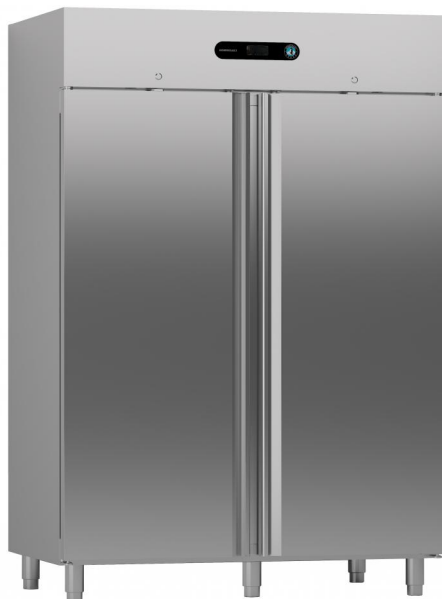

GAMME DE PRODUITS: SNOWFLAKE GII
NUMÉRO D'ARTICLE: 878010824

Notre gamme Snowflake GII est pensée pour s'adapter aux environnements de travail les plus exigeants et vous garantir une tranquillité d'esprit. Avec une conception intérieure et extérieure intelligente, nos armoires et comptoirs, offrent une réfrigération de qualité pour vos produits frais. L'ergonomie de nos produits est en constante évolution, parce que leur utilisation doit-être simple et pratique, nos armoires bénéficient de glissières en inox embouties qui facilitent le stockage des aliments et nos comptoirs peuvent être pourvus de sections de 2 ou 3 tiroirs pour s'adapter à vos besoins.

As a product that is designed and built to last, this freezer cabinet combines an innovative design concept, premium materials and clever extras:

- Minimum cool air lost: double insulated and extra wide door gaskets help to keep the cold air into the cabinet
- Both interior and exterior are built of stainless steel AISI 304, which is among the best choices for hygienic and food safe cooking environments
- Anti-tilt mechanism: moulded liners for saver container and rooster handling
- Reversible doors for maximum flexibility
- Removable gaskets make sure you can clean the device thoroughly
- This and other thoughtful extras, such as the cleaning-free condenser, are designed to reduce kitchen cleaning times whilst storing foods protectively in the best possible way

The refrigerant used in all Snowflake GII HC models is R290. This agent is a natural gas which enhances the performance of the refrigerated counter and has, compared to other refrigerants, a minimal ozone depletion potential.

EXTÉRIEUR

Inox AISI 304

INTÉRIEUR

Inox AISI 304

Type de réfrigérant: R290 / Equivalent en CO2: 0,426 kg

Classe d'efficacité énergétique

E



HOSHIZAKI

SNOWFLAKE G II SUF-135DG-C-L

SPÉCIFICATIONS TECHNIQUES

Plage de température	Taille de l'étagère	Volume, brut	Alimentation électrique	Classe climatique
-20/-10°C	GN 2/1 en profondeur	1 310 l	230V, 50Hz	4

SPÉCIFICATIONS TRANSPORT

Poids brut	Largeur	Profondeur	Hauteur	Poids net
240 kg	1 344 mm	840 mm	1 996 mm	240 kg



Dessin dimensionnel à venir



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Pays exportateurs sales.ex@hoshizaki-europe.com
Autres pays sales.ex@hoshizaki-europe.com

www.hoshizaki.fr