

Advance K 140-4 C U

Double door refrigerator



SERIE: ADVANCE 140
CODICE ARTICOLO: 131142090

Hoshizaki Advance K 140 C U is a 2/1 GN deep double door refrigerator with a net usable volume of 797 ltr. ranking C in energy efficiency class. It has a cabinet height of 1975mm and depth of 830mm without.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Clean free condenser (condenser filter not needed)
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Complete wall rails, Shelf support
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2 / 1 GN

ACCESSORI INCLUSI

6 ripiani grigi (530 x 650 mm) + 2 ripiano inferiore

ACCESSORI OPZIONALI

Set of legs 130-180 mm
Set of castors 125 mm (2 x broken and 2 x unbroken)
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (6 top and 2 bottom) with back guard
Shelf support U-shape, left side
Shelf support U-shape, right side
Master key
Pedal door openers with overload protection

PERIODO DI GARANZIA

5 anni di garanzia su parti di ricambio & manodopera

RIVESTIMENTO ESTERNO

Acciaio Inox

RIVESTIMENTO INTERNO

Acciaio Inox

Tipologia refrigerante: R290 / Refrigerante: 0,085 kg / Equivalente CO2: 0,255 kg

CERTIFICAZIONI



Consumo elettrico	Classe di efficienza energetica	Classe di efficienza energetica standard	Indice di Efficienza Energetica (IEE)
926 kWh/year	C	ISO 22041-2019	48,32 EEI



HOSHIZAKI

Advance K 140-4 C U



SPECIFICHE TECNICHE

Intervallo di temperatura	Dimensioni ripiano	Volume lordo	Volume netto	Alimentazione	Valori di allacciamento	Classe climatica	Livello rumorosità	Capacità di refrigerazione - a -10°C
0/+10°C	2/1 GN prof.	1.200 l	797 l	230V, 50Hz	270 W	5	52 dB	634 W


SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Volume (con imballo)	Peso lordo	Larghezza	Profondità	Altezza	Peso netto
1.435 mm	920 mm	2.090 mm	2,76 m ³	184 kg	1.344 mm	830 mm	1.975 mm	172 kg


Avvertenza: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

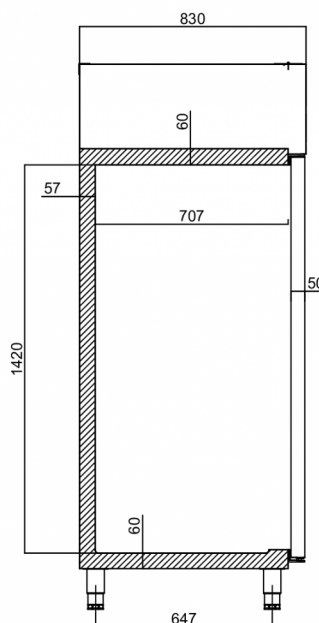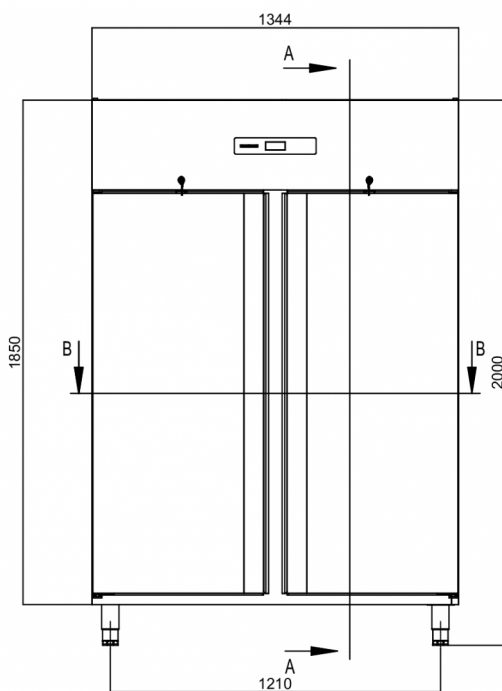

A-A

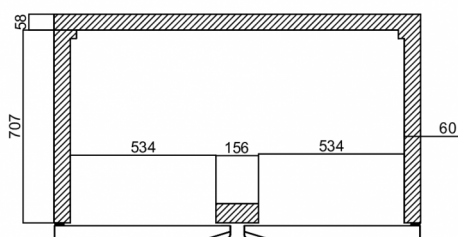

B-B



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com