



HOSHIZAKI

Advance F 70-4 C DR U Freezer



PRODUCT SERIES: ADVANCE, ADVANCE 70
CODICE ARTICOLO: 133702030

Hoshizaki Advance F 70 C DR U is a 2/1 GN deep freezer with a net usable volume of 420 ltr. ranking in energy efficiency class D. It has a cabinet height of 1975mm and depth of 830mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Clean free condenser (condenser filter not needed)
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2 / 1 GN

ACCESSORI INCLUSI

3 ripiani grigi (530 x 650 mm) + 1 ripiano inferiore

ACCESSORI OPZIONALI

Set of legs 130-180 mm

Set of castors 125 mm (2 x broken and 2 x unbroken)

Grey shelf with back guard

Grey bottom shelf with back guard

Stainless shelf with back guard

Stainless bottom shelf with back guard

Set of stainless shelves (3 top and 1 bottom) with back guard

Master key

Pedal door openers with overload protection

PERIODO DI GARANZIA

**5 anni di garanzia su parti di
ricambio & manodopera**

RIVESTIMENTO ESTERNO

Acciaio Inox

RIVESTIMENTO INTERNO

Acciaio Inox

Tipologia refrigerante: R290 / Refrigerante: 0,082 kg / Equivalente
CO2: 0,246 kg

CERTIFICAZIONI



Consumo elettrico	Classe di efficienza energetica	Classe di efficienza energetica standard	Indice di Efficienza Energetica (IEE)
2.389 kWh/year	D	ISO 22041-2019	67,46 EEI



HOSHIZAKI

Advance F 70-4 C DR U




SPECIFICHE TECNICHE

Intervallo di temperatura	Dimensioni ripiano	Volume lordo	Volume netto	Alimentazione	Valori di allacciamento	Classe climatica	Livello rumorosità	Capacità di refrigerazione - a -25°C
-25/-12°C	2/1 GN prof.	600 l	420 l	230V, 50Hz	650 W	5	54 dB	506 W


SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Volume (con imballo)	Peso lordo	Larghezza	Profondità	Altezza	Peso netto
745 mm	920 mm	2.090 mm	1,43 m ³	121 kg	654 mm	830 mm	1.975 mm	112 kg

Avvertenza: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

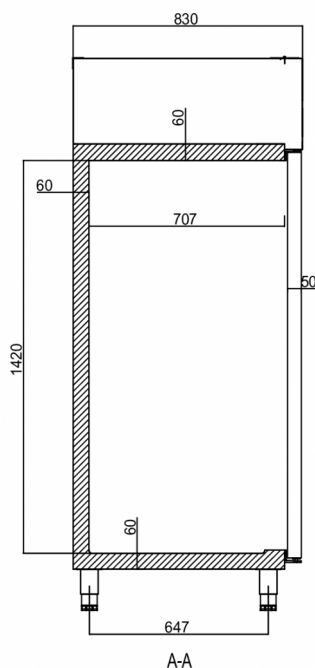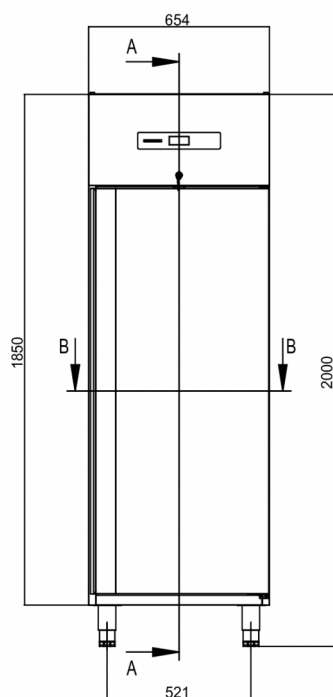

B-B



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com