



# HOSHIZAKI

## Premier U 140 U Ru1 Frigorifero doppia porta



**2/1 GN**

### ACCESSORI INCLUSI

6 ripiani grigi (530 x 650 mm) + 2 ripiano inferiore, Pedale per apertura porta

SERIE: PREMIER 140

CODICE ARTICOLO: 188141091

Hoshizaki Premier U 140 U Ru1 is a double door 2/1 GN deep cabinet with RU1 valve for connection to a remote cooling system. It is ready to install and is compatible with multiple refrigerants. This heavy duty cabinet has a gross volume of 1400 ltr. and the height of the cabinet with adjustable legs is 2080-2130mm. Adjustable legs are 130-180mm. The depth is 848mm without pedal door opener (920mm incl. pedal door opener).

Ultimate flexibility with 'U' type cabinet:

The cabinet can be set to run as a refrigerator or as a freezer. Set the controller to run as either K, M or F cabinet with the following temperature ranges:

K: +2/+12°C M: -5/+12°C F: -25/-5°C

- Monoblock
- Airflow guide
- Low sound level
- 1 right hand and 1 left hand hinged door
- Automatic door closing
- Door lock x 2
- Removable gaskets
- Pedal door opener x 2
- Complete wall rails, Shelf support
- 8 grey shelves (530 x 650mm)
- Round edges inside
- LED lighting
- Legs, H = 130-180mm

#### PERIODO DI GARANZIA

**1 anno di garanzia su parti di ricambio**

#### RIVESTIMENTO ESTERNO

**Acciaio Inox AISI 304**

#### RIVESTIMENTO INTERNO

**Acciaio inossidabile AISI 304**

Compatibilità del refrigerante: R448A, R449A, R452A

#### CERTIFICAZIONI





# HOSHIZAKI

## Premier U 140 U Ru1


### SPECIFICHE TECNICHE

Dimensioni ripiano	Volume lordo	Alimentazione	Capacità di raffreddamento minima (Modalità K e M) a -10°C	Intervallo di regolazione temperatura	Classe climatica
2/1 GN prof.	1.400 l	230V, 50Hz	700 W	-25/+12°C	5

### SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Volume (con imballo)	Peso lordo	Larghezza	Profondità	Altezza	Altezza inclusa le gambe (minimo)	Altezza inclusi le gambe (massimo)	Peso netto
1.420 mm	975 mm	2.150 mm	2,977 m3	186 kg	1.380 mm	848 mm	1.950 mm	2.080 mm	2.130 mm	170 kg

Esonero da responsabilità: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

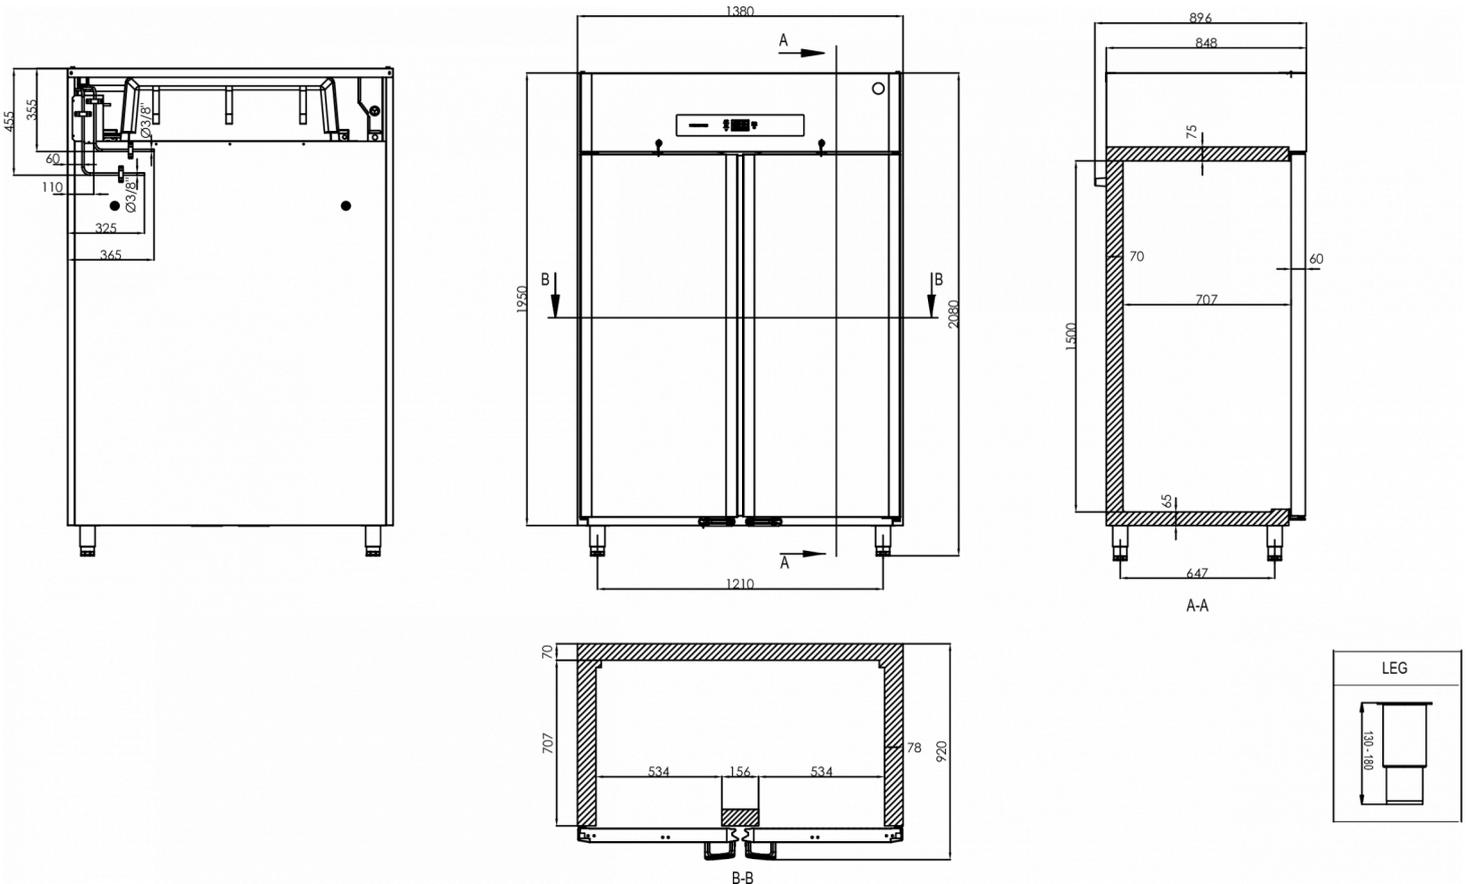

Hoshizaki Belgium [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Danmark [info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
Hoshizaki Deutschland [vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
Hoshizaki France [info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
Hoshizaki Iberia [info@hoshizaki.es](mailto:info@hoshizaki.es)  
Hoshizaki Italia [commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
Hoshizaki Middle East [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
Paesi di esportazione [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
Altri paesi [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)