

Premier K 2 A 3D 3D L E

2-Section Refrigerated Counter



PRODUCT SERIES: PREMIER, PREMIER 270
CODICE ARTICOLO: 211000044100
PAESE DI ORIGINE: TURCHIA

Hoshizaki Premier K 2 A 3D 3D L E is a 2-section 1/1 GN refrigerated counter with 2 drawer sections each with 3 x 1/3 drawers and a flat worktop. It has a net usable volume of 155 ltr. The body height is 750 mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- Drawers with pull-out stop
- 3 x 1/3 drawer sets compatible with 150mm deep GN pans
- The cooling performance allows for drawer section next to compressor compartment
- Removable magnetic drawer gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 2X water protection
- Matching design identity as the Premier cabinets



1/1 GN

ACCESSORI OPZIONALI

Set of legs 125-200 mm
Set of legs 130-180 mm
Set of castors 125 mm
Set of castors 150 mm
Set of castors 200 mm
Castor Extension Kit (extends height of castors by 50 mm)
Door section
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers
Soft-close drawer Conversion Kit (for retrofit)
Flat worktop
Flat worktop with 50mm splashback
Flat worktop with 100mm splashback

PERIODO DI GARANZIA

6 anni di garanzia su parti di ricambio & manodopera

RIVESTIMENTO ESTERNO

Acciaio Inox AISI 304

RIVESTIMENTO INTERNO

Acciaio inossidabile AISI 304

Tipologia refrigerante: R600a / Refrigerante: 0,07 kg / Equivalente CO2: 0,21 kg

CERTIFICAZIONI



Classe di efficienza energetica	Classe di efficienza energetica standard	Indice di Efficienza Energetica (IEE)
A	ISO 22041-2019	17,85 EEI



HOSHIZAKI




Premier K 2 A 3D 3D L E

SPECIFICHE TECNICHE


Intervallo di temperatura	Dimensioni ripiano	Volume lordo	Volume netto	Alimentazione	Classe climatica	Livello rumorosità	Capacità di refrigerazione - a -10°C
+2/+12°C	1/1 GN prof.	301 l	155 l	230V, 50Hz	5	43 dB	206 W

SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Peso lordo	Larghezza	Profondità	Altezza inclusa le gambe (minimo)	Altezza inclusi le gambe (massimo)	Peso netto
1.340 mm	730 mm	1.081 mm	132 kg	1.314 mm	700 mm	880 mm	930 mm	120 kg

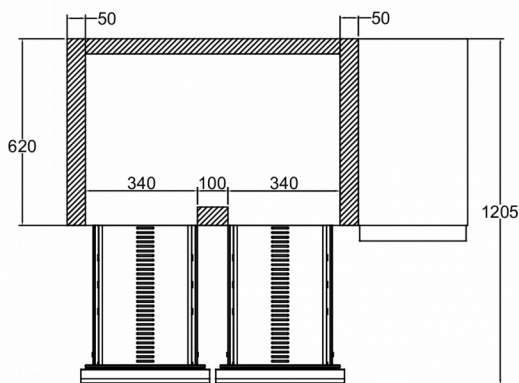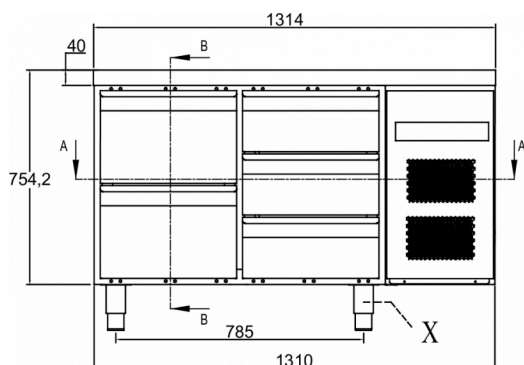

SECTION A-A

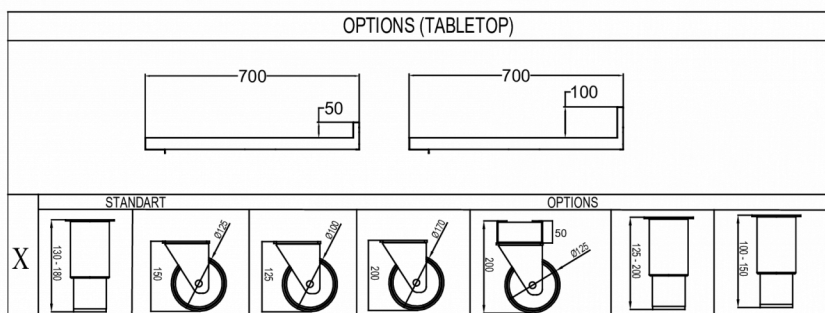

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com



HOSHIZAKI

Premier K 2 A 3D 3D L E

