

Premier K 3 A DL DL 2D L E

3-Section Refrigerated Counter



PRODUCT SERIES: PREMIER, PREMIER 370
CODICE ARTICOLO: 311000113100
PAESE DI ORIGINE: TURCHIA

Hoshizaki Premier K 3 A DL DL 2D L E is a 3-section 1/1 GN refrigerated counter with two doors, a drawer section with 2 x 1/2 drawers and a flat worktop. It has a net usable volume of 280 ltr. The body height is 750 mm, the shelf width is 325 mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- Reversible doors
- Anti-tilt shelves
- Drawers with pull-out stop
- The cooling performance allows for drawer section next to compressor compartment
- Removable magnetic door and drawer gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 2X water protection
- Matching design identity as the Premier cabinets



1/1 GN

ACCESSORI INCLUSI

2 ripiani grigi per sezione

ACCESSORI OPZIONALI

Set of legs 125-200 mm
Set of legs 130-180 mm
Set of castors 125 mm
Set of castors 150 mm
Set of castors 200 mm
Castor Extension Kit (extends height of castors by 50 mm)
Stainless shelf, 325 x 530mm
Grey shelf, 325 x 530mm
Shelf supports, 2 of
Door section
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers
Soft-close drawer Conversion Kit (for retrofit)
Flat worktop
Flat worktop with 50mm splashback
Flat worktop with 100mm splashback

PERIODO DI GARANZIA
6 anni di garanzia su parti di ricambio & manodopera

RIVESTIMENTO ESTERNO
Acciaio Inox AISI 304

RIVESTIMENTO INTERNO
Acciaio inossidabile AISI 304

Tipologia refrigerante: R290 / Refrigerante: 0,065 kg / Equivalente CO2: 0,195 kg

CERTIFICAZIONI



Consumo elettrico	Classe di efficienza energetica	Classe di efficienza energetica standard	Indice di Efficienza Energetica (IEE)
525 kWh/year	A	ISO 22041-2019	20,95 EEI



HOSHIZAKI

Premier K 3 A DL DL 2D L E




SPECIFICHE TECNICHE

Intervallo di temperatura	Dimensioni ripiano	Volume lordo	Volume netto	Alimentazione	Valori di allacciamento	Classe climatica	Livello rumorosità	Capacità di refrigerazione - a -10°C
+2/+12°C	1/1 GN prof.	463 l	280 l	230V, 50Hz	125 W	5	43 dB	350 W

SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Volume (con imballo)	Peso lordo	Larghezza	Profondità	Altezza inclusa le gambe (minimo)	Altezza inclusi le gambe (massimo)	Peso netto
1.783 mm	730 mm	1.081 mm	1,43 m3	151 kg	1.755 mm	700 mm	884,2 mm	934,2 mm	138 kg

Avvertenza: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

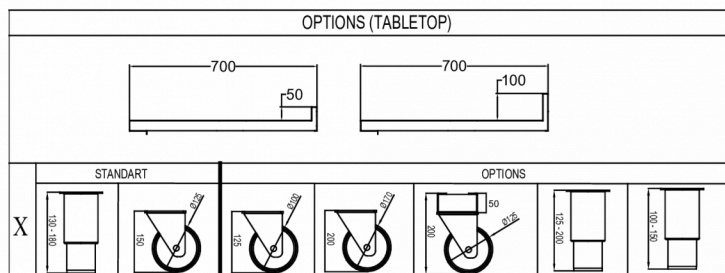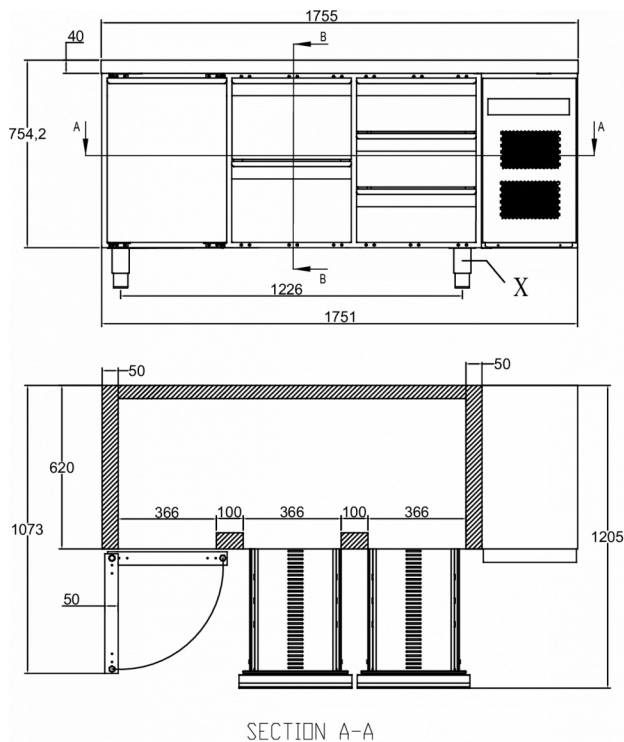

DATF



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com



HOSHIZAKI

Premier K 3 A DL DL 2D L E

