




HOSHIZAKI

ADVANCE SBU65GT (400V)

Blast Chiller



1 / 1 GN



600 x 400 EN

ACCESSORI INCLUSI

N/A

ACCESSORI OPZIONALI

N/A

CODICE ARTICOLO: 975780542

PAESE DI ORIGINE: ITALY

Easy to read LCD control panel. The encoder wheel makes navigation intuitively easy to learn.

- Choose either the IFR operation, time or temperature controlled chill/freeze cycle.
- Prevent surface freezing damage with the IFR blast chilling function.
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm.
- Up to 20 customised cycles can be stored.
- Operates as a storage cabinet after the chilling/freezing process has finished.

- Digital control panel with segment display for simple and fast navigation
- Single-point probe for precise core temperature control
- USB port for download of cooling log data
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 14
- The internal fan section can be opened for cleaning around and behind the unit
- Defrost drip tray position under the cabinet
- Right hand hinged door
- Reversible door
- Removable magnetic door gasket

PERIODO DI GARANZIA

2 anni di garanzia su parti di ricambio & manodopera

RIVESTIMENTO ESTERNO

Acciaio Inox AISI 304

RIVESTIMENTO INTERNO

Acciaio inossidabile AISI 304

Tipologia refrigerante: R290 / Refrigerante: 0,3 kg / Equivalente CO2: 0,9 kg

CERTIFICAZIONI



Consumo energetico - Raffreddamento (kWh/kg)	Consumo energetico - Congelamento (kWh/kg)
0,08 kWh/kg	0,25 kWh/kg



HOSHIZAKI

ADVANCE SBU65GT (400V)

SPECIFICHE TECNICHE



Dimensione teglia GN	Numero massimo teglie	Intervallo di temperatura	Alimentazione	Classe climatica	Livello rumorosità	Capacità di refrigerazione - a -25°C	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
1/1 GN / 400 x 600 mm EN	14	-40/+10°C	400V, 3N-/50 Hz	5	64 dB	2.610 W	70 kg	38 kg

Distance between guide positions, GN/EN	Dimensions internal (W x D x H)	Maximum depth of gastro pans, GN/EN	Height from base to first guide	Height from ceiling to top guide
530/600	645 mm x 702 mm x 1.080 mm	325/400	58 mm	74 mm

SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Peso lordo	Larghezza	Profondità	Altezza inclusa le gambe (minimo)	Altezza inclusi le gambe (massimo)	Peso netto
880 mm	990 mm	2.180 mm	270 kg	800 mm	930,4 mm	1.954 mm	2.004 mm	245 kg

Avvertenza: Abbiamo cercato di garantire che le informazioni contenute in questa scheda tecnica siano accurate al momento della pubblicazione. Hoshizaki Europe BV non si assume alcuna responsabilità per errori tipografici o omissioni o per qualsiasi interpretazione errata delle informazioni all'interno della pubblicazione e si riserva il diritto di modificare le stesse senza preavviso.

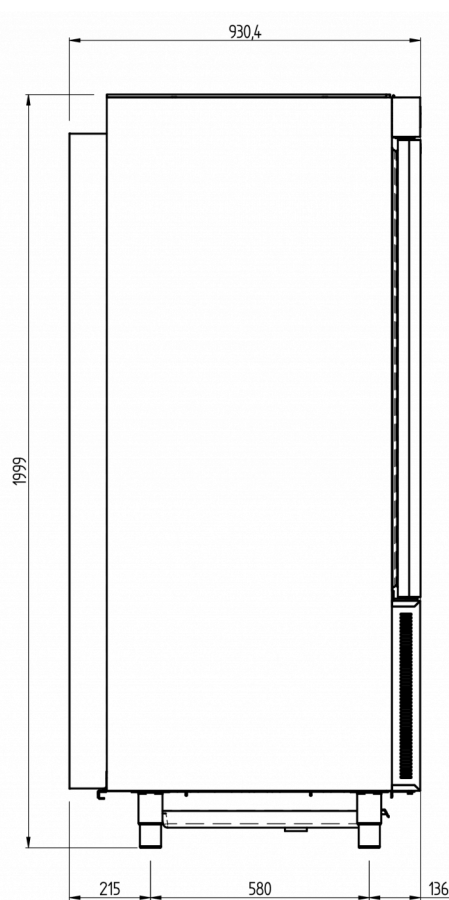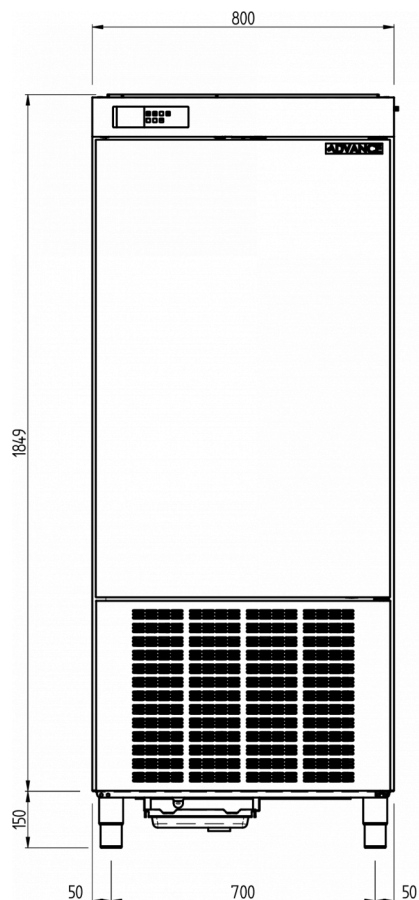

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com