



HOSHIZAKI

FM-1000AKE-R452N-SB

Nugget Ice Maker, Modular

Produzione (kg/24h) - AT 10°C, WT 10°C: 860



TIPOLOGIA GHIACCIO: Nugget



ACCESSORI INCLUSI

Kit d'installazione, Mounting bracket

ACCESSORI OPZIONALI

4HC-H water filtration

FILTRI ACQUA CORRISPONDENTI

4HC-H Filtro Acqua Triplo, 4HC Cartuccia di sostituzione

CONTENITORI CORRISPONDENTI

B-210SB, B-340SB

KIT DI ABBINAMENTO CORRISPONDENTI

TK-18D per B-340SB, TK-30 per B-210SB (optional, non necessario), TK-48 per B-340SB (optional, non necessario)

SERIE: FM 1000

CODICE ARTICOLO: F055-C207

PAESE DI ORIGINE: UNITED KINGDOM (UK)

Hoshizaki FM-1000AKE-R452N is a modular ice maker producing up to 860 kg of nugget ice per 24 hours. This model is compatible with our storage bins.

- FM models can be converted to either flake or nugget ice only by a qualified engineer
- CleanCycle6 system for rinse of built up impurities (minerals) every 6 hours
- Water consumption is equal to the ice production
- Ice making system with an automatic rinse cycle
- Closed water circuit for contamination protection
- Electronic controller
- Operation time-based parts replacement system for preventive maintenance
- Auger is made of double hardened stainless steel
- Carbon graphite bushings allows the machine to work without grease
- Cleanable air filter

PERIODO DI GARANZIA

2 anni di garanzia su parti di ricambio & manodopera

RIVESTIMENTO ESTERNO

Acciaio Inox AISI 441, Acciaio Galvanizzato (Posteriore)

Tipologia refrigerante: R452 / Refrigerante: 1,35 kg / Equivalente CO2: 2.889 kg

CONDIZIONI DI UTILIZZO

Temperatura ambiente (minima): 5 °C, Temperatura ambiente (massima): 40 °C, Pressione acqua (minima): 0.05MPa (0.5bar), Pressione acqua (massima): 0.8MPa (8bar), Temperatura acqua (minima): 5 °C, Temperatura acqua (massima): 35 °C, Voltaggio: Rated Voltage $\pm 10\%$


CERTIFICAZIONI





HOSHIZAKI

FM-1000AKE-R452N-SB

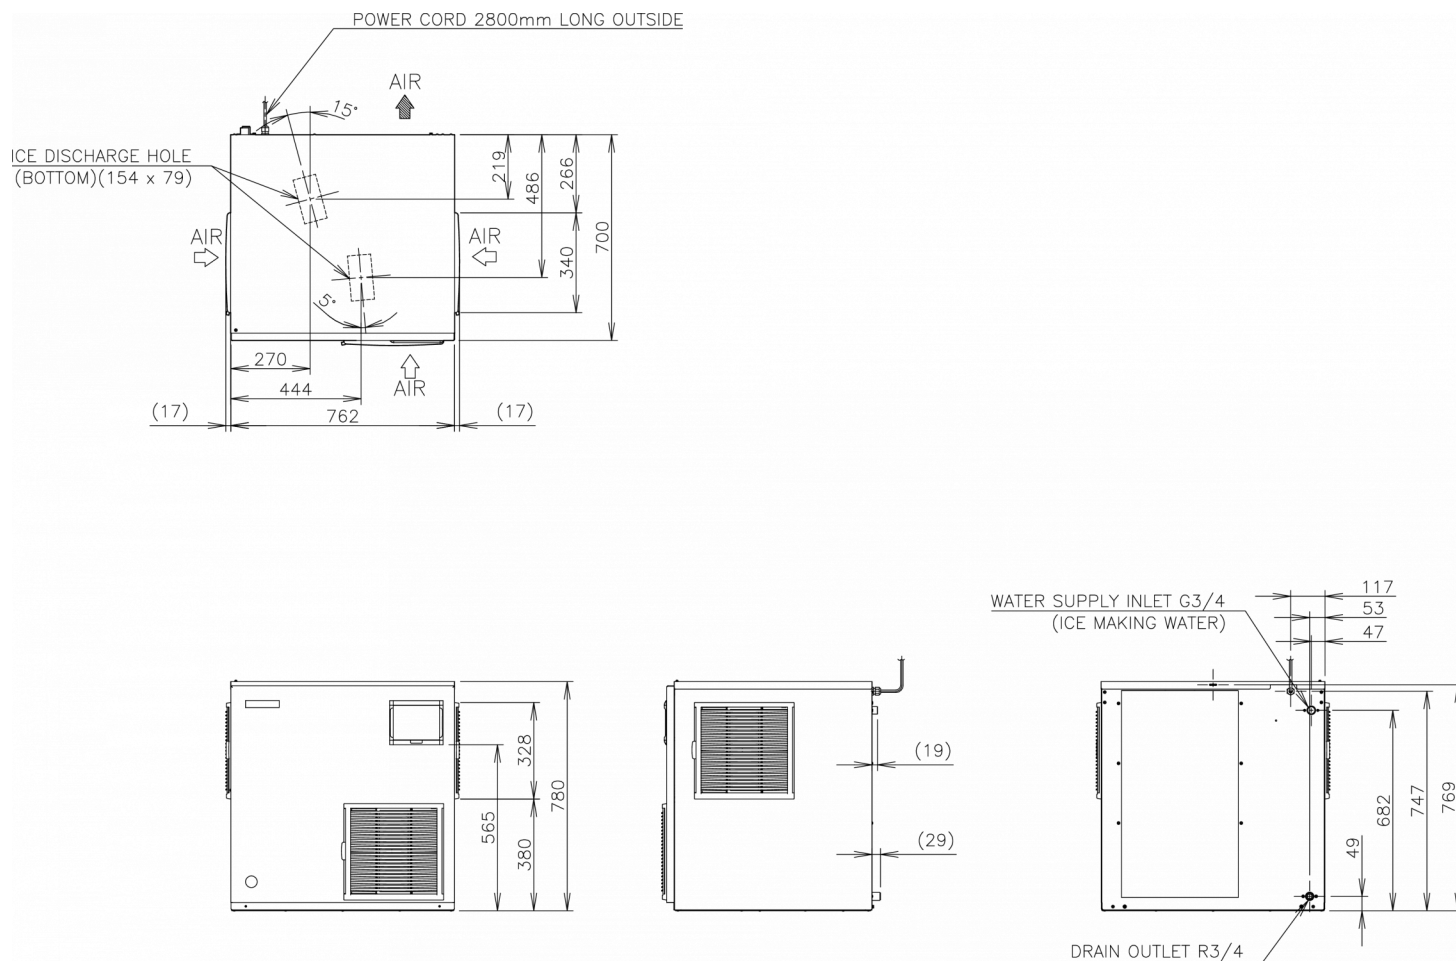

SPECIFICHE TECNICHE

Sistema di raffreddamento	Alimentazione	Consumo elettrico	Emissione calore (AT 32°C, WT 21°C)	Produzione (kg/24h) - AT 10°C, WT 10°C	Produzione (kg/24h) - AT 21°C, WT 15°C	Produzione (kg/24h) - AT 32°C, WT 21°C	Consumo acqua (m3/24h) - AT 10°C, WT 10°C
Raffreddamento ad Aria	220-240V/50Hz/1ph	2,55 kWh	4,47 kW	860	730	590	0,87

SPECIFICHE DI TRASPORTO

Larghezza (con imballo)	Profondità (con imballo)	Altezza (con imballo)	Volume (con imballo)	Volume lordo	Peso lordo	Larghezza	Profondità	Altezza	Peso netto
873 mm	820 mm	947 mm	0,678 m3	0,678 l	156 kg	762 mm	700 mm	780 mm	146 kg

Avvertenza: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Prestare attenzione: This type of icemaker is on special order only. Please take longer lead times into consideration.



Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Paesi di esportazione
Altri paesi
info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com
www.hoshizaki-europe.com