


Premier K 60 L DR

Refrigerator



1/1 EN

AKCESORIA W KOMPLECIE

4 grey shelves (400 x 600 mm), Pedal door opener with overload protection

OPCJONALNE DODATKI

Set of legs 130-180 mm
Set of castors 125 mm (2 x broken and 2 x unbroken)
Grey shelf with back guard
Stainless shelf with back guard
Set of 4 stainless shelves with back guard
Set of 2 shelf supports U shape
Master key

PRODUCT SERIES: PREMIER, PREMIER 60
NUMER ARTYKUŁU: 181601010
KRAJ POCHODZENIA: TURKEY

Hoshizaki Premier K 60 L DR is a refrigerator suitable for the Euronorm 1/1 system (400 x 600 mm) with a net usable volume of 335 litr. ranking A in energy efficiency class. It has a cabinet height of 2080-2130 mm and depth of 848 mm without pedal door opener (depth of 920 mm incl. pedal door opener). Legs are adjustable 130-180 mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Clean free condenser (condenser filter not needed)
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

OKRES GWARANCJI

6 lata na części zamienne i robociznę

ZEWNĘTRZNY

Stal nierdzewna AISI 304

WNĘTRZE

Stainless steel AISI 304

Rodzaj czynnika chłodniczego: R600a / Czynnik chłodniczy: 0,08 kg /
Ekwiwalent CO2: 0,24 kg

CERTYFIKATY



Zużycie energii	Klasa energooszczędności	Standardowa klasa energooszczędności	Indeks efektywności energetycznej (EEI)
286 kWh	A	ISO 22041-2019	24,71 EEI



HOSHIZAKI

Premier K 60 L DR





SPECYFIKACJA TECHNICZNA

Zakres temperatur	Rozmiar prusztu	Objętość, brutto	Objętość, netto	Zasilanie	Obciążenie przyłącza	Klasa klimatyczna	Poziom głośności	Wydajność - at -10°C
+2/+12°C	Shelf Euronorm 400x600mm Suitable for 1/1 EN system	480 l	335 l	230V, 50Hz	120 kW	5	46 dB	206 kW

SPECYFIKACJA WYSYŁKI

Szerokość (w opakowaniu)	Głębokość (w opakowaniu)	Wysokość (w opakowaniu)	Objętość (w opakowaniu)	Waga brutto	Szerokość	Głębokość	Wysokość z nogami (minimalna)	Wysokość łącznie z nogami (maksimum)	Waga netto
670 mm	880 mm	2 150 mm	1,26 l	120 kg	610 mm	848 mm	2 080 mm	2 130 mm	110 kg

Zastrzeżenie: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

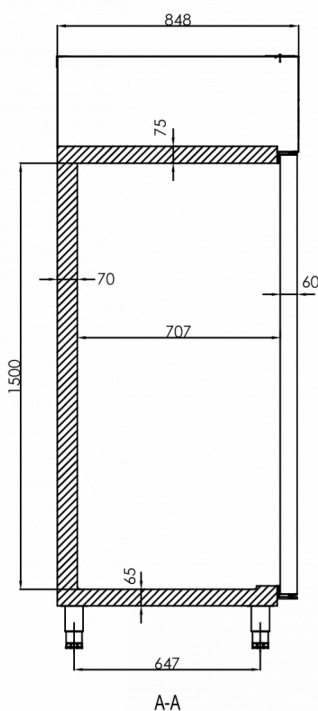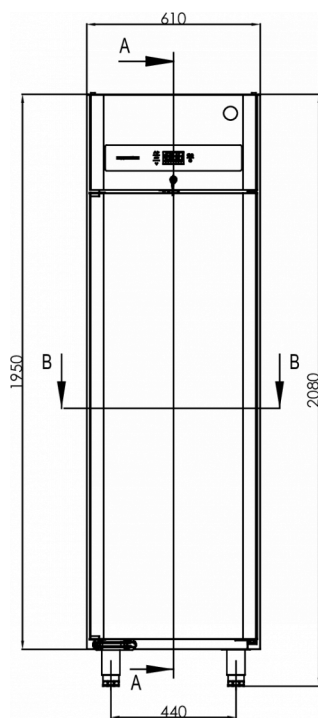

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com