



HOSHIZAKI

Premier K 3 A DL DR L E 3-Section Refrigerated Counter



SERIA PRODUKTU: PREMIER 370
NUMER ARTYKUŁU: 311000112100

Hoshizaki Premier K 3 A DL DR L E is a 3-section 1/1 GN refrigerated counter with three doors and a flat worktop. It has a net usable volume of 288 ltr. The shelf width is 325 mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- Reversible doors
- Anti-tilt shelves
- Removable magnetic door gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 2X water protection
- Matching design identity as the Premier cabinets



1 / 1 GN

AKCESORIA W KOMPLECIE

2 grey shelves per door section

OKRES GWARANCJI

**6 lat na części zamienne i
robocizną**

OBUDOWA

Stal nierdzewna AISI 304

WNĘTRZE

Stal nierdzewna AISI 304

Rodzaj czynnika chłodniczego: R290 / Czynnik chłodniczy: 0,065 kg /
Ekwiwalent CO2: 0,195 kg

CERTYFIKATY



Zużycie energii	Klasa energooszczędności	Standardowa klasa energooszczędności	Indeks efektywności energetycznej (EEI)
474 kWh/rok	A	ISO 22041-2019	18,77 EEI

Premier K 3 A DL DL DR L E



SPECYFIKACJA TECHNICZNA

Zakres temperatur	Rozmiar prusztu	Objętość, brutto	Objętość powierzchni netto	Objętość, netto	Zasilanie	Obciążenie przyłącza	Klasa klimatyczna	Poziom głośności	Wydajność - w -10°C
+2/+12°C	1/1 GN	463 l	288 l	288 l	230V, 50Hz	125 W	5	43 dB	350 W

SPECYFIKACJA WYSYŁKI

Szerokość (w opakowaniu)	Głębokość (w opakowaniu)	Wysokość (w opakowaniu)	Objętość (w opakowaniu)	Waga brutto	Szerokość	Głębokość	Wysokość z nogami (minimalna)	Wysokość łącznie z nogami (maksimum)	Waga netto
1 783 mm	730 mm	1 081 mm	1,43 m3	144 kg	1 755 mm	700 mm	884,2 mm	934,2 mm	131 kg

Zastrzeżenie: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

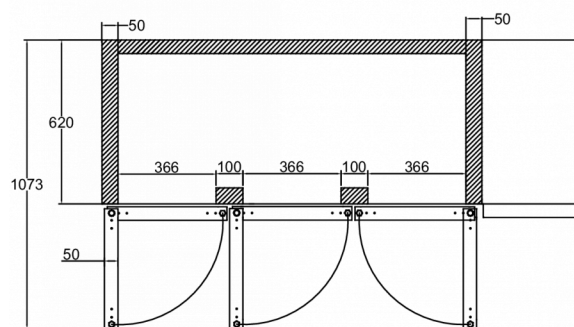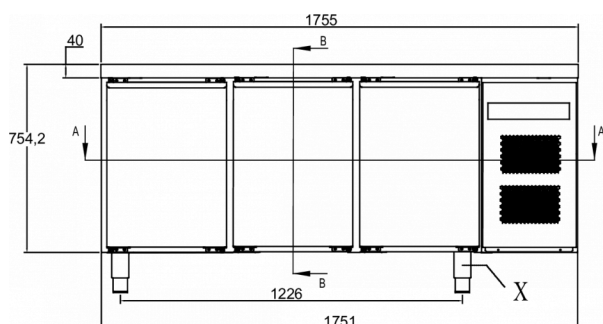

SECTION A-A

