



HOSHIZAKI

KPS 21 CH U

Blast Chiller



SERIA PRODUKTU: KPS

NUMER ARTYKUŁU: 865780552

Easy to read LCD control panel. The encoder wheel makes navigation intuitively easy to learn.

Choose either the IFR operation, time or temperature controlled chill/freeze cycle. Prevent surface freezing damage with the IFR blast chilling function. HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm. Up to 20 customised cycles can be stored. Operates as a storage cabinet after the chilling/freezing process has finished.

OBUDOWA

Stal nierdzewna

WNĘTRZE

Stal nierdzewna

Czynnik chłodniczy: 1,4 kg / Ekwiwalent CO2: 2 997,4 kg

Zużycie energii - Schładzanie (kWh/kg)

0,09 kWh/kg



HOSHIZAKI


KPS 21 CH U

SPECYFIKACJA TECHNICZNA

Zakres temperatur	Zasilanie	Poziom głośności	Wydajność (w -10°C)	Wydajność chłodzenia (od +70°C do +3°C w ciągu 90 minut)
0/+10°C	230V, 50Hz	65 dB	692 kW	22 kg

SPECYFIKACJA WYSYŁKI

Waga brutto	Szerokość	Głębokość	Wysokość z nogami (minimalna)	Wysokość łącznie z nogami (maksimum)
130 kg	745 mm	720 mm	820 mm	900 mm

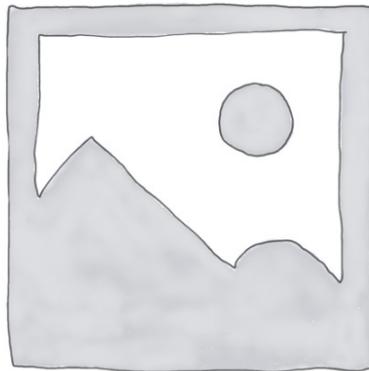

Dimensional drawing coming soon



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com