

Advance F 140-4 C U

Double door freezer



GAMMES DE PRODUITS: ADVANCE 140
NUMÉRO D'ARTICLE: 133142090

Hoshizaki Advance F 140 C U is a 2/1 GN deep double door freezer with a net usable volume of 797 ltr. ranking D in energy efficiency class. It has a cabinet height of 1975mm and depth of 830 mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Compartmentalized design for maximum internal capacity and easy maintenance
- Clean free condenser (condenser filter not needed)
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Anti-tilt shelf-supports moulded into the inner lining
- Complete wall rails, Shelf support
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pan-shaped inside base with rounded corners to catch fluids
- IP2X water protection
- Matching design identity as the Advance counters



2 / 1 GN

ACCESSOIRES INCLUS

6 grilles rilsanisées grises (530 x 650 mm) + 2 grilles de fond

ACCESSOIRES OPTIONNELS

Set of legs 130-180 mm
Set of castors 125 mm (2 x broken and 2 x unbroken)
Grey shelf with back guard
Grey bottom shelf with back guard
Stainless shelf with back guard
Stainless bottom shelf with back guard
Set of stainless shelves (6 top and 2 bottom) with back guard
Shelf support U-shape, left side
Shelf support U-shape, right side
Master key
Pedal door openers with overload protection

PÉRIODE DE GARANTIE
5 ans

EXTÉRIEUR
Inox

INTÉRIEUR
Inox

Type de réfrigérant: R290 / Réfrigérant: 0,105 kg / Equivalent en CO2: 0,315 kg

CERTIFICATIONS



Consommation électrique	Classe d'efficacité énergétique	Classe d'efficacité énergétique standard	Indice d'Efficacité énergétique (IEE)
3 642 kWh/an	D	ISO 22041-2019	67,44 EEI



HOSHIZAKI

Advance F 140-4 C U



SPÉCIFICATIONS TECHNIQUES

Plage de température	Taille de l'étagère	Volume, brut	Volume net utile	Alimentation électrique	Puissance connectée	Classe climatique	Niveau sonore	Capacité de réf. à -25°C
-25/-12°C	GN 2/1 en profondeur	1 200 l	797 l	230V, 50Hz	700 W	5	56 dB	674 W


SPÉCIFICATIONS TRANSPORT

Largeur (emballée)	Profondeur (emballée)	Hauteur (emballée)	Volume (emballé)	Poids brut	Largeur	Profondeur	Hauteur	Poids net
1 435 mm	920 mm	2 090 mm	2,76 m ³	199 kg	1 344 mm	830 mm	1 975 mm	188 kg


Avertissement: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

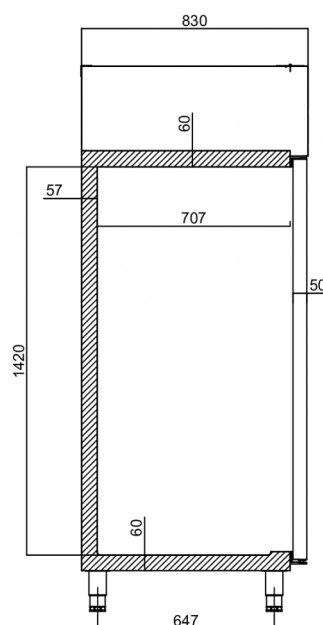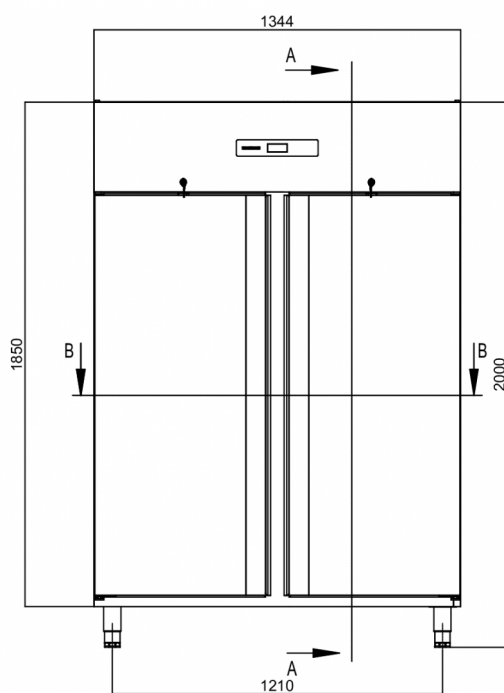

A-A

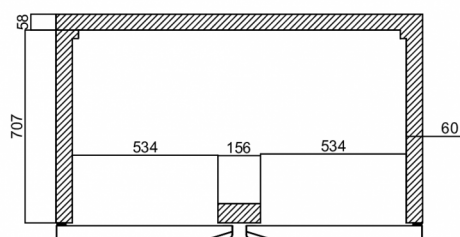

B-B



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Pays exportateurs
Autres pays

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.be