



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL BK

Roll-in Unibody Blast Chiller/Freezer. Transport car support with legs



ITEM NUMBER: 5CCA8DQEH-20A3IC
COUNTRY OF ORIGIN: ITALY

PREMIER BCF RIT U 100 A 3N DL BK is a HACCP compliant blast chiller/freezer supporting transport cart applicable for trolley GN1/1 or EN60/40. Chilling/freezing capacity of 100/78 kg.

The cabinet comes controller, wi-fi connection, Ethernet port, core probe, external condensate drain tube, USB-port and lock closure.

- 7" touch screen controller with coloured icons
- Cooling functions: Chilling, freezing, preservation, precooling, ice cream hardening, fish sanitisation, bottle cooling, pastry, cell sanitisation
- 'Hot' functions: Thawing, cell drying
- Choice of time- or temperature-controlled (probe) chill/freeze cycles
- Single probe cascade cycles, Timer cycles, Quick start
- Heated core probe
- Can be connected to wi-fi
- Ethernet port
- USB-port for HACCP data collection
- Customisable parameters
- Multiple and customisable cycle stages
- Adjustable fan speed
- Operating in ambient temperatures up to +40°C
- Hot gas defrosting
- Front access to electrical box
- Internal fan section can be opened for easy cleaning around and behind
- Left-hand hinged door (right-hand hinged door is optional)
- Heated door perimeter
- Evaporator with cataphoresis coating for rust protection
- Rounded internal corners
- Lock closure

Compatible with oven trolleys:

- Rational: iCombi 20-11 1/1 GN, iCP-iCC 20-11 1/1 GN, SCC HGW 1/1 GN
- Refigo: VO2011R 1/1
- GNConvotherm: 20.10 1/1 GN

COMPATIBLE WITH

Trolley GN1/1 or EN60/40

OPTIONAL EXTRAS

- Bumpers *
- Ozone generator *
- Right-hand hinged door *
- Wooden crate packaging *
- Wooden cage packaging *

* Add-on = Must be specified when placing the order

WARRANTY PERIOD
**1 Year on Parts & Labour -
based on country agreement**

EXTERIOR
Stainless steel AISI 304

INTERIOR
Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 3 x 0,15 kg / CO2 equivalent:
1.35 kg



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL BK

TECHNICAL SPECIFICATIONS

Cooling system	Temperature range	Climate class	Power supply	Cooling capacity (evap. -10°C / cond. 45°C)	Connection load	Fuse Rating	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Air Cooled	-40/+40°C	5 (max. ambient 40°C w/ 40% RH)	380-420V/3N/50Hz	7,233 W	4,629 W	20 A	100 kg	78 kg

Sound level	Net weight	Height including legs (minimum)	Height including legs (maximum)	Door clear opening (W x H)	Dimensions internal (W x D x H)
70.76 dB(A)	380 kg	2,280 mm	2,365 mm	690 x 1545,8 mm	690 mm x 834 mm x 1,545 mm

SHIPPING SPECIFICATIONS

Dimensions packed (W x D x H)	Volume (packed)	Gross weight
1,100 mm x 1,240 mm x 2,540 mm	3.5 m ³	410 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com


Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com



HOSHIZAKI

PREMIER BCF RIT U 100 A 3N DL BK

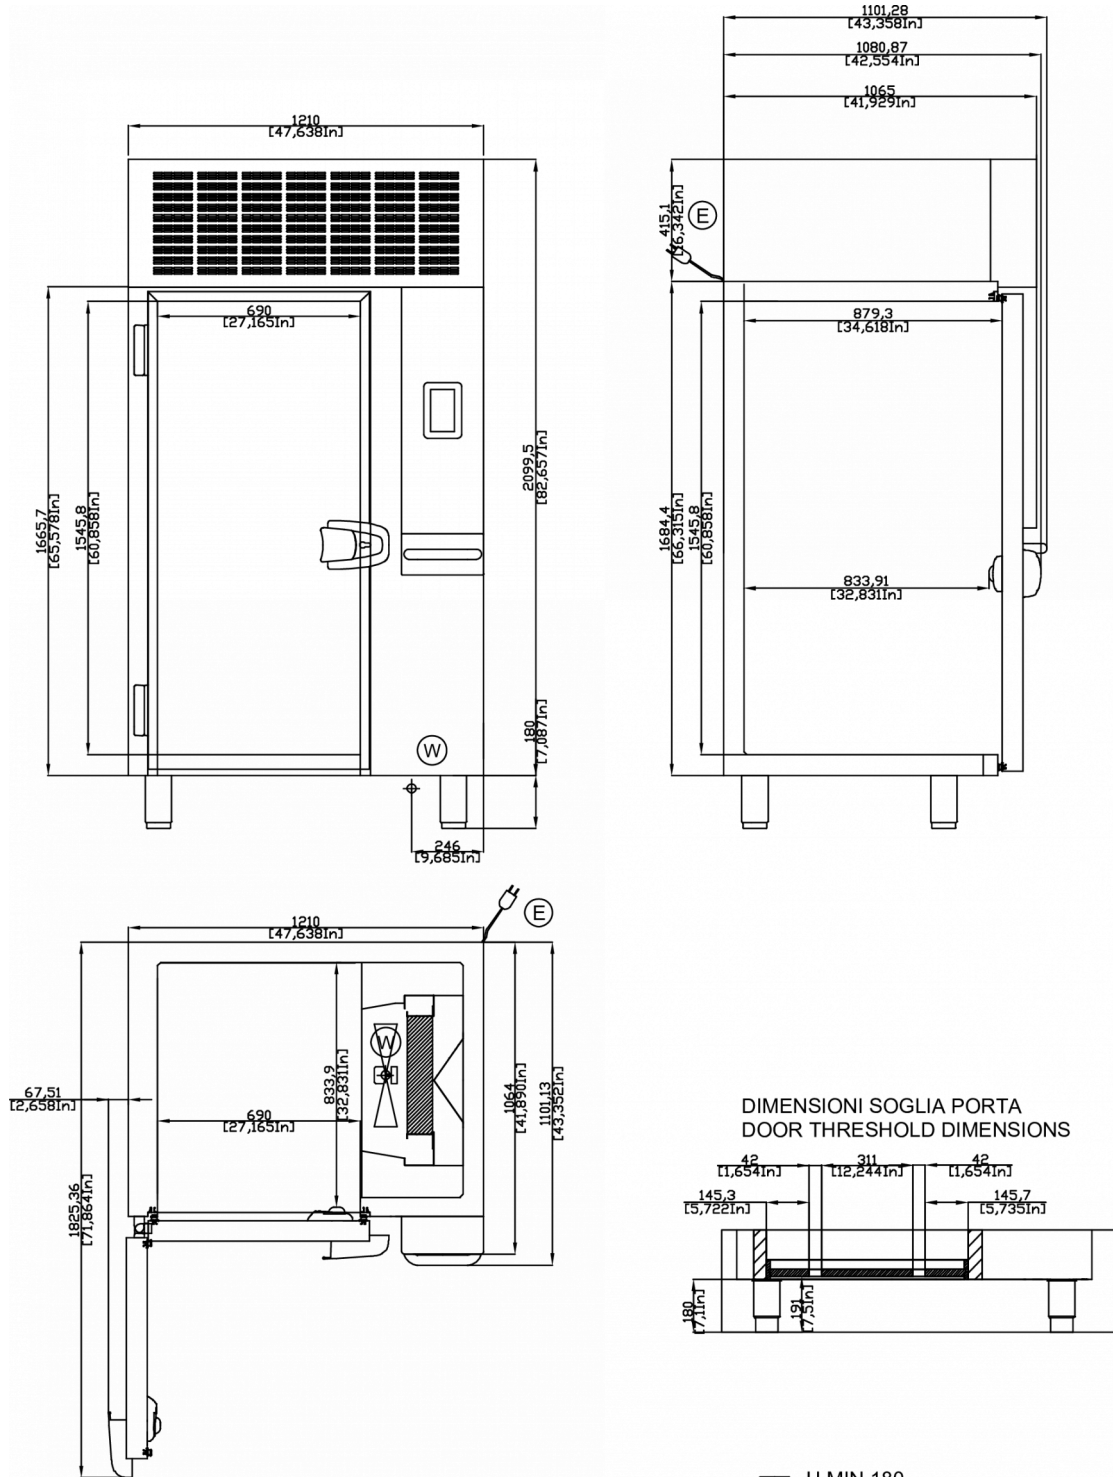

- H MIN 180
H MAX 265
- CONNESSIONE SCARICO
DRAIN CONNECTION
- CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION



Hoshizaki Belgium info@hoshizaki.nl
 Hoshizaki Danmark info@hoshizaki.dk
 Hoshizaki Deutschland vertrieb@hoshizaki.de
 Hoshizaki France info@hoshizaki.fr
 Hoshizaki Iberia info@hoshizaki.es
 Hoshizaki Italia commerciale@hoshizaki.it
 Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com