



HOSHIZAKI

PREMIER KPS 21 SG Blast Chiller/Freezer



PRODUCT SERIES: PREMIER KPS 21
ITEM NUMBER: 875780551
COUNTRY OF ORIGIN: ITALY

PREMIER KPS 21 SG is a HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 5). Chilling/freezing capacity of 25/15 kg. It features IFR control system and a user friendly 7" touch display. Use the preset favorite programs or store your customized cycles. Legs are adjustable 75-108 mm.

- 7" touch display with coloured icons
- USB port for download of cooling log data
- Cooling functions: Chilling (soft/hard), freezing (soft/hard), preservation, precooling, infinity
- 'Hot' functions: Thawing, proofing, retarder-prover
- Choose either IFR operation, time or temperature controlled chill/freeze cycle
- Prevent surface freezing damage with the IFR blast chilling function
- Triple-point probe (3 measuring points)
- HACCP: Infinite events up to one year of recording
- Audio-visual HACCP alarms in case of power failure or if a temperature limit is exceeded
- Alarms: Saving up to 40 events
- 10 favorite programs for both blast chilling, blast freezing and retarder proving
- Up to 20 customized cycles can be stored
- Automatic shift to 'storage mode' after the chilling process
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Automatic defrosting
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 5
- The internal fan section can be opened for cleaning around and behind the unit
- Right hand hinged door
- 90° self-closing door system
- Removable magnetic door gasket



1 / 1 GN



600 x 400 EN

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

N/A

WARRANTY PERIOD

**3 Years on Parts & Labour -
based on country agreement**

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.15 kg / CO2 equivalent: 0.45 kg

| Energy consumption - Chilling (kWh/kg) | Energy Consumption - Freezing (kWh/kg) |
|--|--|
| 0.078 kWh/kg | 0.27 kWh/kg |

CERTIFICATIONS



Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com



HOSHIZAKI

PREMIER KPS 21 SG

TECHNICAL SPECIFICATIONS

| Cooling system | GN tray size | Temperature range | Climate class | Power supply | Ref. capacity (at -25°C) | Chilling capacity (from +70°C to +3°C in 90 minutes) | Freezing capacity (from +70°C to -18°C in 4 hours) |
|-------------------------|--------------------------|-------------------|---------------------------------|--------------|--------------------------|--|--|
| Built-in cooling system | 1/1 GN / 400 x 600 mm EN | -40/+45°C | 5 (max. ambient 40°C w/ 40% RH) | 230V, 50Hz | 950 W | 25 kg | 15 kg |

| Sound level | Net weight | Maximum depth of gastro pans, GN/EN | Height from base to first guide | Height from ceiling to top guide | Distance between guide positions, GN/EN | Height including legs (minimum) | Height including legs (maximum) | Dimensions internal (W x D x H) | Dimensions external (W x D x H) |
|-------------|------------|-------------------------------------|---------------------------------|----------------------------------|---|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| 60 dB(A) | 115 kg | 325/400 | 38 mm | 48 mm | 530/600 | 847 mm | 880 mm | 620 mm x 590 mm x 375 mm | 746.5 mm x 744 mm x 772 mm |

SHIPPING SPECIFICATIONS

| Dimensions packed (W x D x H) | Volume (packed) | Gross weight |
|-------------------------------|----------------------|--------------|
| 810 mm x 770 mm x 1,100 mm | 0.686 m ³ | 125 kg |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



HOSHIZAKI

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com


Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com



HOSHIZAKI

PREMIER KPS 21 SG

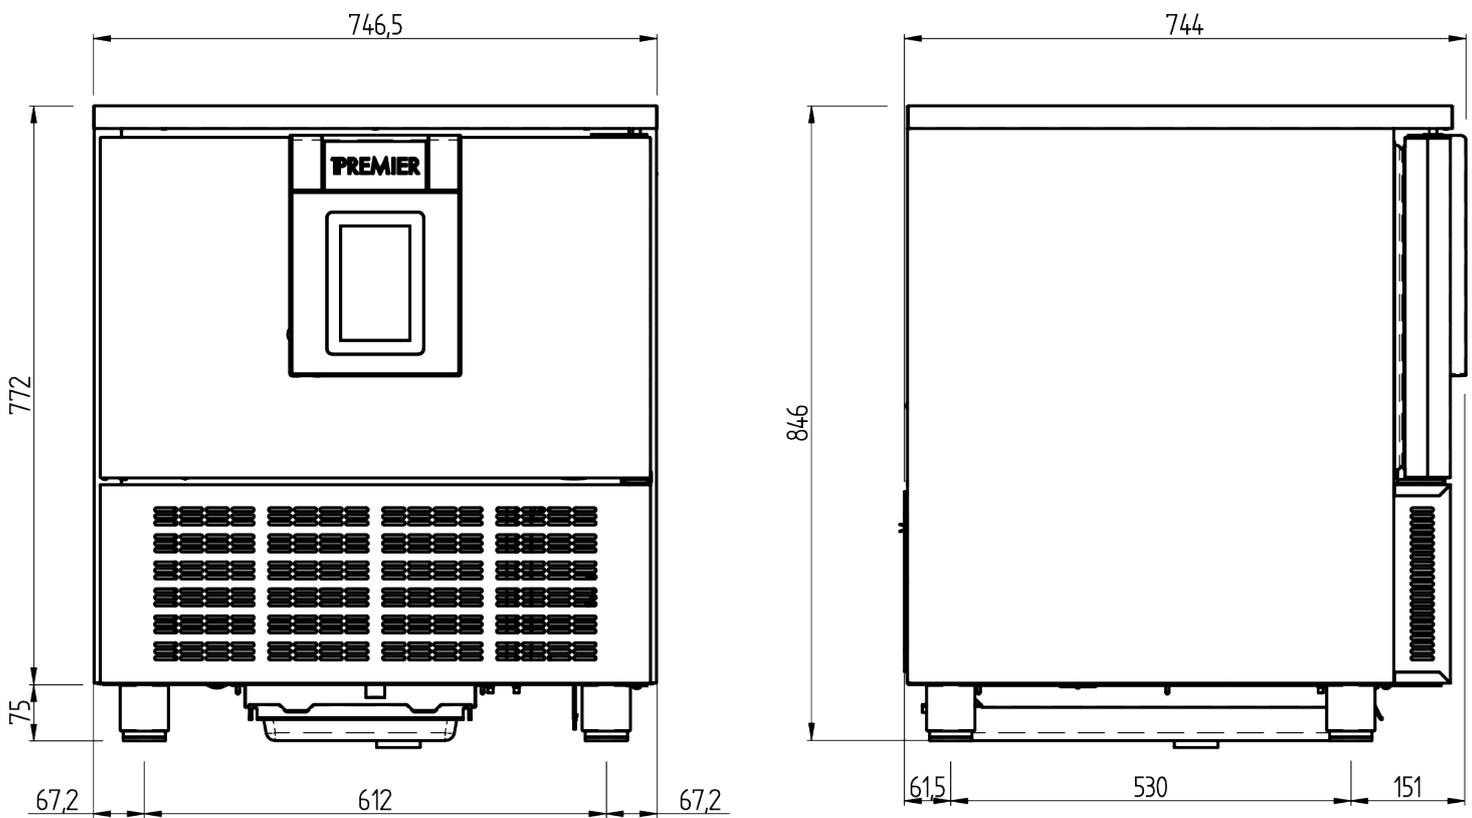

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige orderSE@hoshizaki.dk
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com