



# HOSHIZAKI


## IM-240DPE-U

### Cuber, Modular & Stackable

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 210



ICE TYPE: Large cubes, Standard



Cube Size: L-STANDARD  
Weight: 23 g

#### ACCESSORIES INCLUDED

brace, Installation kit, Scoop

#### OPTIONAL EXTRAS

4HC-H water filtration, compatibility kit for stacking combinations including new and previous N series ice makers.

#### CORRESPONDING WATER FILTERS

4HC-H Twin Water Filter, 4HC Replacement Cartridge

#### CORRESPONDING BIN(S)

B-340SB

#### CORRESPONDING TOP KITS

TK-48 for B-340SB (optional, not required), TK-IMD2 for B-340SB

PRODUCT SERIES: IM 240

ITEM NUMBER: M120-D200

COUNTRY OF ORIGIN: UK

Hoshizaki IM-240DPE-U UltraCube model is a modular and stackable ice maker with UVC sanitization function producing up to 210 kg of cube ice per 24 hours. This model is compatible with Hoshizaki storage bins.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may differ due to local installation conditions.

- Ice making system with an automatic rinse cycle.
- Each ice cycle is made with fresh water.
- Closed water circuit for contamination protection.
- Closed Cell System helps produce compact, hard and geometrically perfect ice.
- Easy external access to control panel.
- System comes with a magnetic DC water pump with variable speed and that has no direct coupling, which prevents any leakage.
- UV sanitization function sanitizing air and water (UV-C irradiation).
- Cleanable air filter.
- Stainless steel frame inside.
- Easily removable water pan assembly.
- A maximum of 3 units are stackable: 1 x DPE + 2 x XPE

#### WARRANTY PERIOD

3 Years on Parts & Labour

#### EXTERIOR

Stainless steel AISI 441, Galvanized steel (Rear)

Refrigerant type: R290 / Refrigerant: 0.147 kg / CO2 equivalent: 0.441 kg

#### OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range: Rated Voltage ±6%

#### CERTIFICATIONS







Certified Product to  
NSF REG4 33





# HOSHIZAKI

## IM-240DPE-U

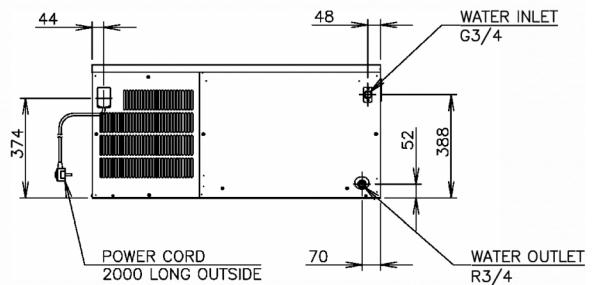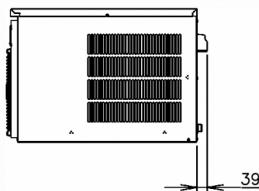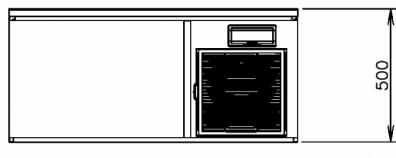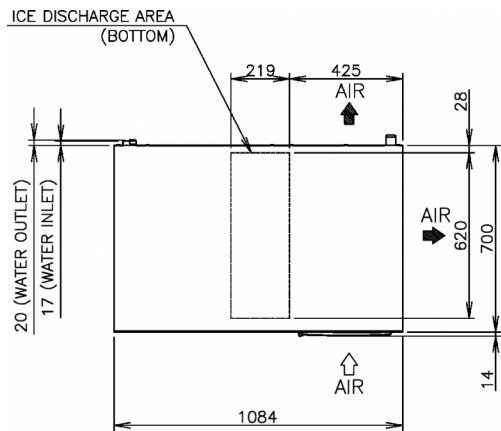

### TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m³/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	5 A	2.25 kW	210	195	175	0.67

### SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1,196 mm	825 mm	640 mm	0.632 m³	96 kg	1,084 mm	700 mm	500 mm	82 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Hoshizaki Middle East

[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)



**HOSHIZAKI**

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)